BLEDIM SX-HC-10-07-67

Date: 2010-07-07 (Wed)
Start: 10:00:00 (UTC-07:00)
Stop: 10:00:00 (UTC-07:00)
Duration: 00:00:00 (0 samples)

Model: SX-HC
Serial: 67
Firmware: 1.0.0.0
Sensor: Temperature
Sensor Serial: 0
Sensor Firmware: 0.0.0.0
Battery: 0.00 (0.00 V)
Memory: 0 (0 % free)
Sampling: 1 min
Mode: Temperature
Alarm: Disabled
Alarm Delay: 0 min
Alarm Cycle: 0 min
Alarm Type: Temperature
Alarm Limits: 0.00 / 0.00 °C
Alarm Count: 0 / 0

Statistics			
Total Samples	0	Lost Samples	0
Alarm Samples	0	Alarm Events	0
Alarm Duration	0 min	Alarm Cycle Duration	0 min

Alarm Events					
Alarm Event	Start	Stop	Duration	Max	Min

Alarm Cycles					
Alarm Cycle	Start	Stop	Duration	Max	Min



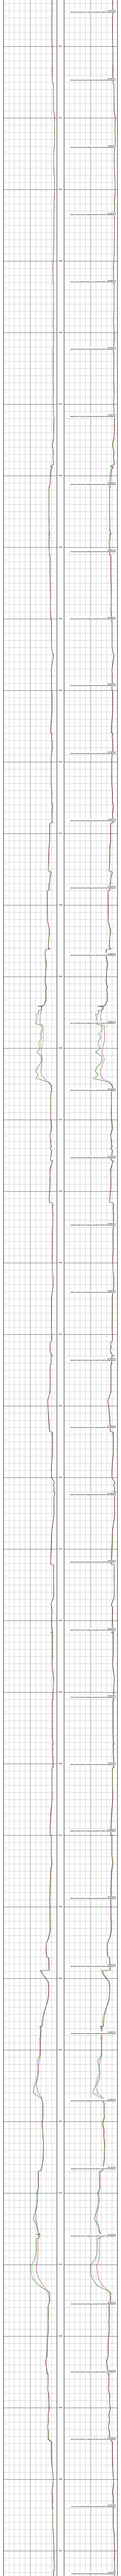

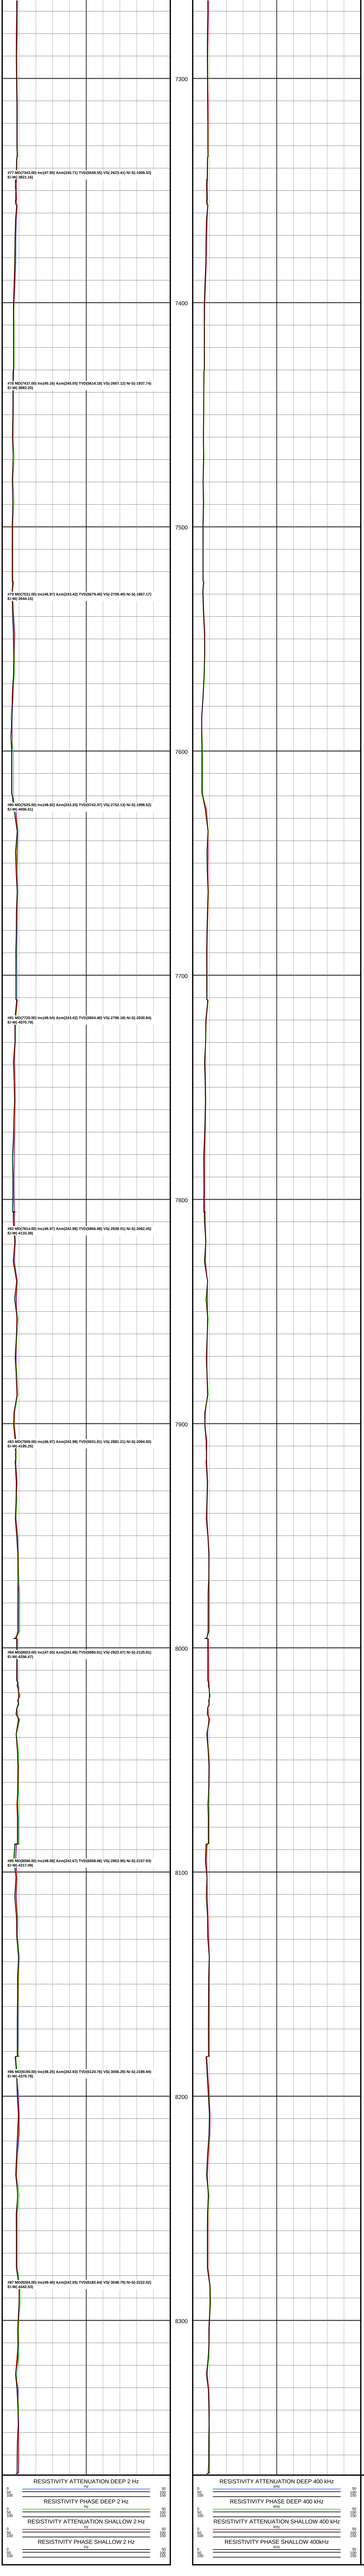

RESISTIVITY ATTENUATION DEEP 2 Hz
RESISTIVITY PHASE DEEP 2 Hz
RESISTIVITY ATTENUATION SHALLOW 2 Hz
RESISTIVITY PHASE SHALLOW 2 Hz

RESISTIVITY ATTENUATION DEEP 400 kHz
RESISTIVITY PHASE DEEP 400 kHz
RESISTIVITY ATTENUATION SHALLOW 400 kHz
RESISTIVITY PHASE SHALLOW 400kHz