




TELEPHONE
442-7386

PAUL H. UMBACH

GEOLOGIST
611 18TH STREET PINESTAD, FLAGSTAFF ROAD
BOULDER, COLORADO 80302

April 29, 1965



Oil & Gas Commission
Room 312 - State Services Bldg.
1525 Sherman Street
Denver, Colorado 80203

OIL & GAS
CONSERVATION COMMISSION

Re: Shoreline Field
Complete #1 Whitaker
for production in
"D" and "O" Sands

Dear Sirs:

Paul H. Umbach, Operator, requests the Commission enter an order granting applicant leave to complete its Whitaker #1 well for production from "D" and "O" sands and in support of its application states:

1. Applicant's Whitaker No. 1 well is located in the center of the SE $\frac{1}{4}$ SW $\frac{1}{4}$, Sec. 9, T9N, R53W, 6th P.M., Shoreline Field, Logan County, Colorado. The location of wells on adjacent lands is shown on the plat attached hereto and marked Exhibit "A".

2. Applicant is the operator and co-owner with H. A. Nunn, John Dixon, Toltek Drilling Company and Sterling Oil Company of the oil and gas lease covering the land on which the Whitaker No. 1 well is located and said well is producing from the "D" and "O" sands of the Dakota formation.

3. The Whitaker No. 1 was drilled to a total depth of 5165 feet. A test of the "J" Sand was made by Drill Stem Test from 4882 to 4886 feet recovering a total of 400 feet of total fluid with 30 feet free oil, 20 feet of oil cut mud and 350 feet of water with a shut-in pressure of 909 pounds.

The "O" sand was tested by perforating with 4 cone shots per foot from 5088 to 5091 feet swabbing one barrel per hour of 17 gravity oil and no water.

The "J" sand was further tested with 4 cone shots per foot from 4875 to 4881 feet, swabbing one and one-half barrels of fluid per hour, 28% oil, 72% water.

The "J" Sand was then fraced with 10,000 gallons of oil and 10,000 pounds of sand and swabbed with a Baker plug set at 5000 feet at the rate of 15 barrels of fluid

[REDACTED]
00238332

per hour, 25% oil, 75% water. The Baker plug has now been removed with the well pumping at the rate of 350 barrels of water and 20 barrels of oil per day.


The "J" sand was squeezed with 100 sacks of cement and the "D" sand was perforated from 4725 to 4728 with 4 shots per foot, well tested 8700 MCF per day.

A Baker retrievable plug was set at 5000 feet separating the "D" and "O" sands with the "D" gas producing from the casing and the "O" sand pumping from the 2 inch tubing.

4. The production from the two zones from the one well can do no harm, since they are separated by a packer, and should the packer leak it would be readily noticeable since the "O" sand does not produce enough gas to run the equipment on the well.

5. It would be non-commercial to produce the "O" sand from the well without the gas production from the "D" sand, and it would therefore cause the well to be abandoned. By producing the "D" gas the well equipment can be run, as well as heating the "O" oil in the tanks.

Respectfully submitted,

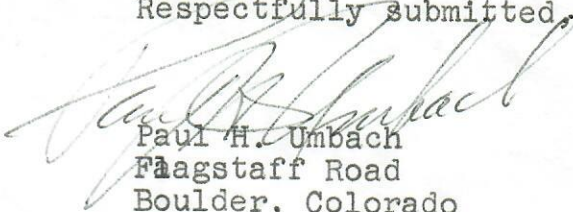
Paul H. Umbach
Flagstaff Road
Boulder, Colorado

PHU:rb