




00241911

OIL AND GAS CONSERVATION COMMISSION OF THE STATE OF COLORADO

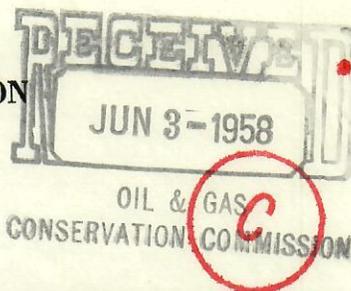

PLUGGING RECORD

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator Utah Southern Oil Company Field Stoneham Wildcat
Lease Name Grabill Well No. 1 County Weld
Location C NW SE Section 29 Township 9N Range 56W Meridian 6th
1980 feet from Section line and 1980 feet from Section Line

TOTAL DEPTH 5895' DATE OF PLUGGING May 22, 1958

DETAILS OF WORK

Pushed wood plug to 5710'; dumped 5 gal. small rock on top. Dumped 10 sks cement; would make 80' cement plug. Ran 10' rock bridge at bottom of surface casing at 192'; dumped 10 sks cement. Filled casing with mud and dumped 5 sks cement at top of surface casing.

Table with 2 columns and 8 rows: AJJ, DVR, WRS, HHM, JAM, FPP, JED, FILE. WRS and FPP have checkmarks.

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved: Date JUN - 4 1958 Company Utah Southern Oil Co. Date June 2, 1958
Address 901 Utah Oil Bldg. Phone No. EM 4-5669
Director A. J. Jorin By M. D. Quigley Title Geologist

PLA gas well