THE WIRELINE GROUP

Cement Bond Log
Gamma Ray/CCL
7" Casing

Company Red Mesa
Well Furguson No.3 #K-2
Field Red Mesa
County La Plata State Colorado

Location: API # : 05-067-06073

SEC TWP 33N RGE 12W

Other Services
Plugs
Perf

Permanent Datum Ground Level Elevation 6515'
Log Measured From K.B. 6'
Drilling Measured From Kelly Bushing

Elevation
K.B.
D.F.
G.L. 6515'

Company Red Mesa
Well Furguson No.3 #K-2
Field Red Mesa
County La Plata
State Colorado

Date	6/23/21
Run Number	One
Depth Driller	3801'
Depth Logger	3726'
Bottom Logged Interval	3000'
Top Log Interval	Surface
Open Hole Size	7-7/8"
Type Fluid	Water
Density / Viscosity	N/A
Max. Recorded Temp.	N/A
Estimated Cement Top	See Log
Time Well Ready	ROA
Time Logger on Bottom	See Log
Equipment Number	8030
Location	Farmington
Recorded By	D.Girodo
Witnessed By	A.Garcia

Borehole Record

Run Number	Bit	From	To

Tubing Record

Size	Weight	From	To

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String	11-3/4"		0'	20'
Prot. String	8-5/8"	24lbs	0'	1092'
Production String	7"	23lbs	0'	3268'
Liner	4-1/2"		3252'	3801'

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for choosing The Wireline Group
Log was ran using a 6' K.B.
Log was ran with 0 PSI @ surface

Database File:	fergusonno3k2.db
Dataset Pathname:	merge1
Presentation Format:	cbldig
Dataset Creation:	Fri Jan 01 06:46:35 2010
Charted by:	Depth in Feet scaled 1:240

420 Travel Time (usec) 320
-20 Collar Locator 1
0 GR (GAPI) 200
0 Amplitude (mV) 100
0 Amplified Amplitude (mV) 10
200 Variable Density 1200

420 Travel Time (usec) 320
-20 Collar Locator 1
0 GR (GAPI) 200
0 Amplitude (mV) 100
0 Amplified Amplitude (mV) 10
200 Variable Density 1200

Database File:	fergusonno3k2.db
Dataset Pathname:	pass5
Presentation Format:	cbldig
Dataset Creation:	Fri Jan 01 01:24:47 2010 by Log SCH 110223
Charted by:	Depth in Feet scaled 1:240

360 Travel Time (usec) 260
-20 Collar Locator 1
0 GR (GAPI) 200
0 Amplitude (mV) 100
0 Amplified Amplitude (mV) 10
200 Variable Density 1200

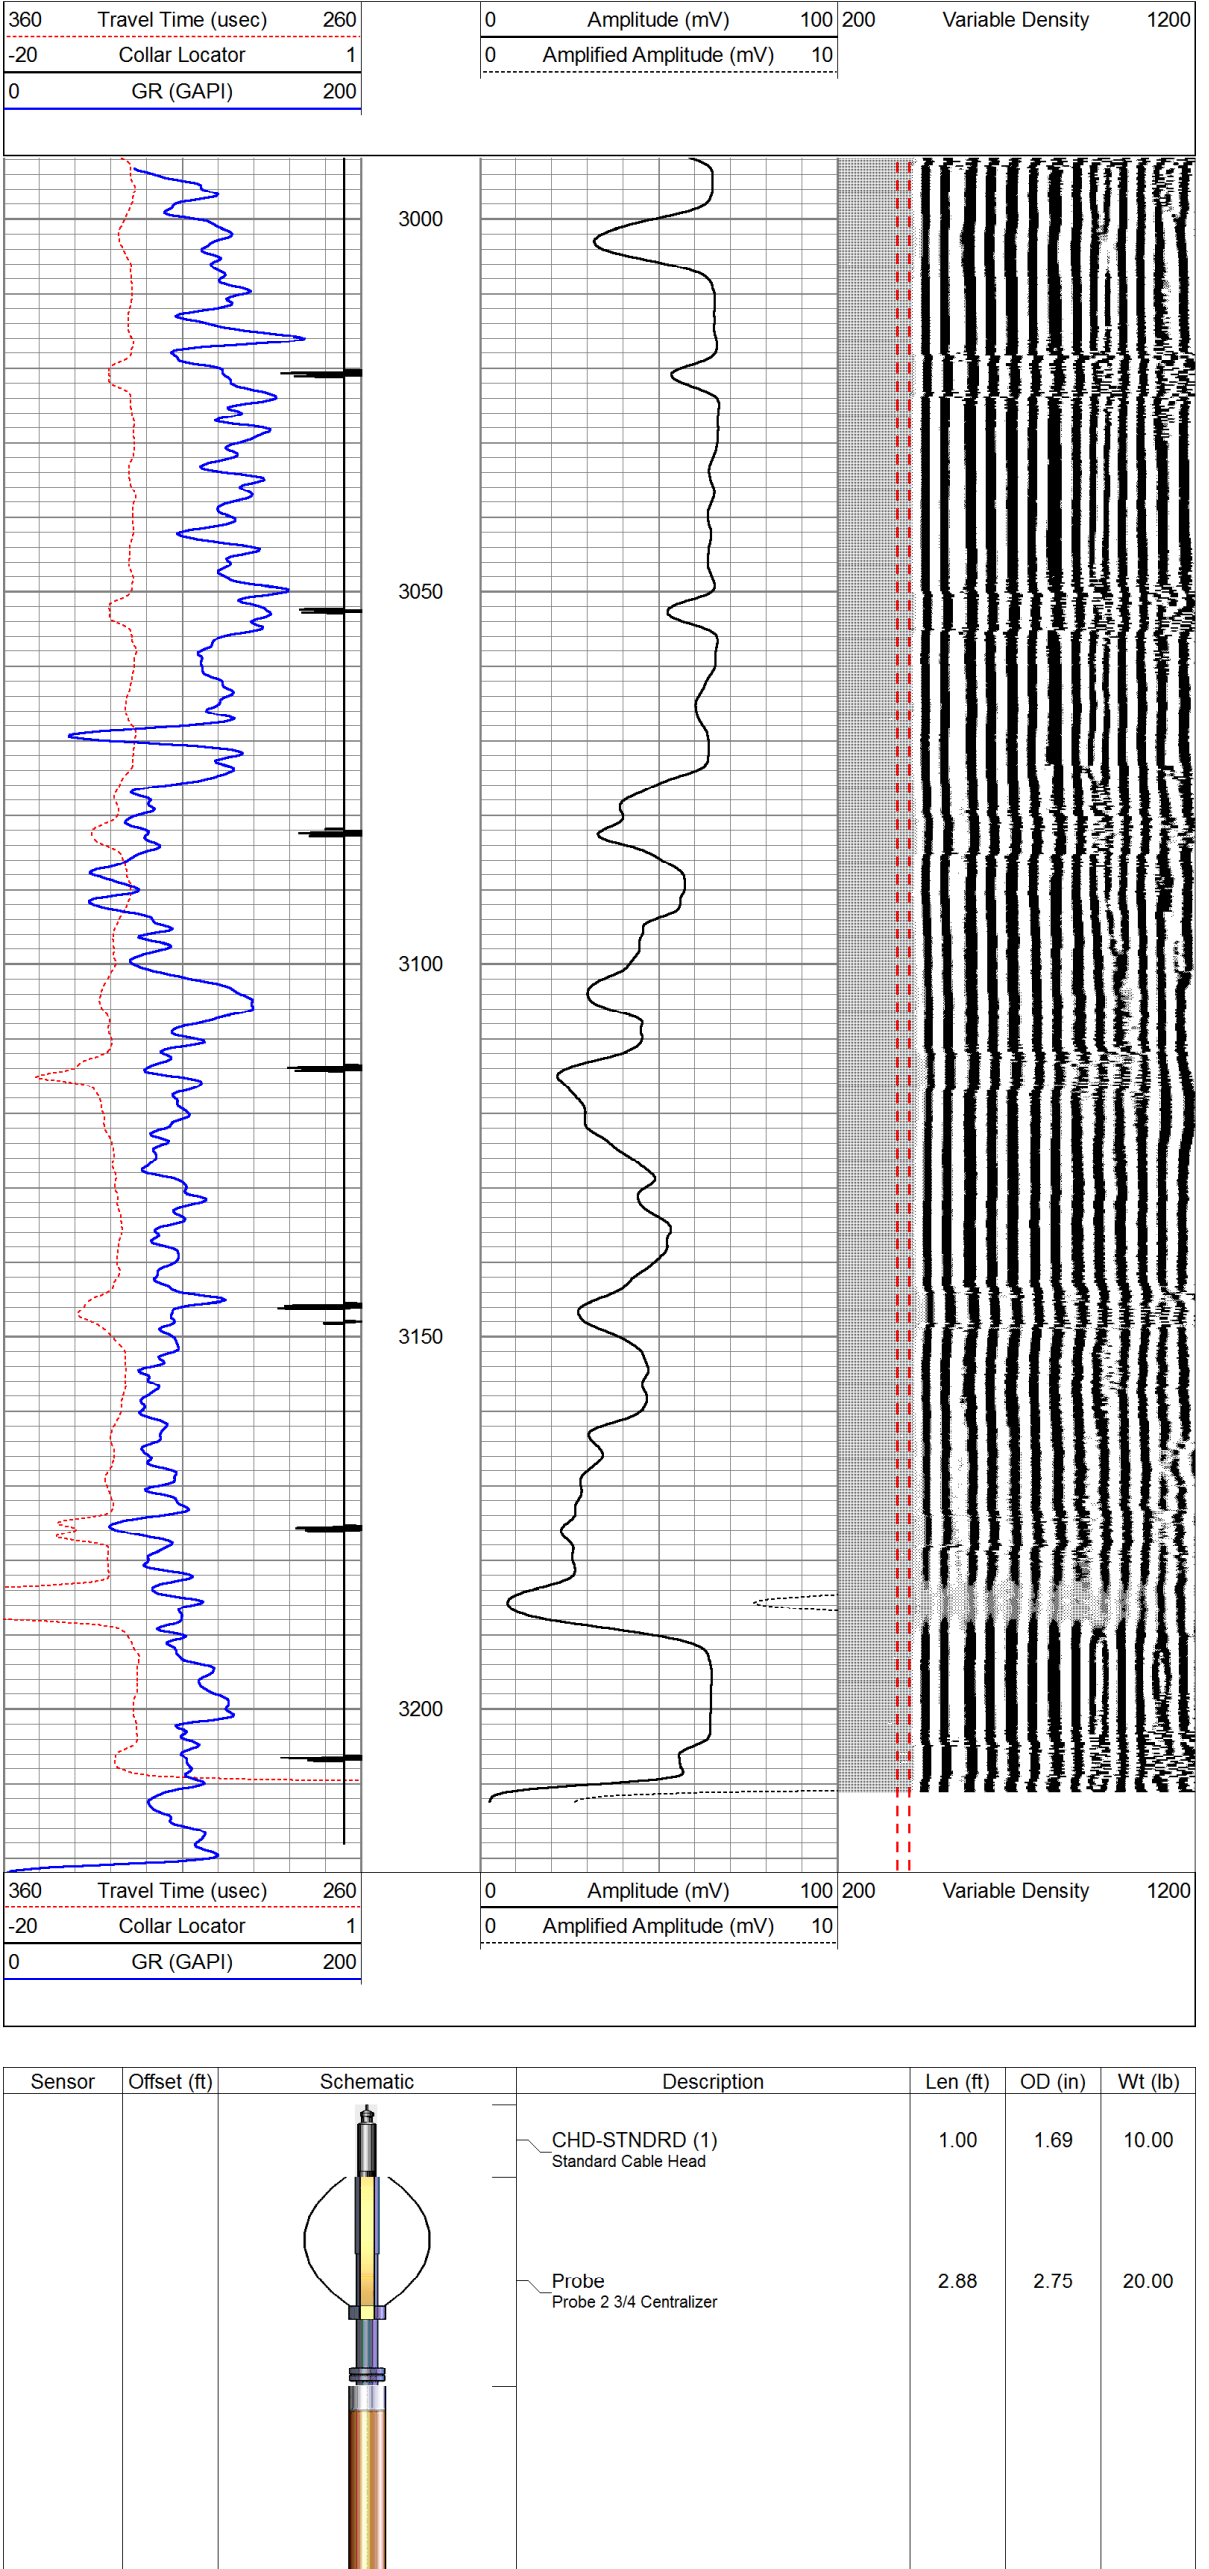

360 Travel Time (usec) 260
-20 Collar Locator 1
0 GR (GAPI) 200
0 Amplitude (mV) 100
0 Amplified Amplitude (mV) 10
200 Variable Density 1200

Sensor	Offset (ft)	Description	Len (ft)	OD (in)	Wt (lb)
		CHD-STNDRD (1) Standard Cable Head	1.00	1.69	10.00
		Probe Probe 2 3/4 Centralizer	2.88	2.75	20.00
WVF3 WVF5	11.71 10.71	CBL-Probe275 (070849) Probe 2.75" Cement Bond Tool	8.75	2.75	92.00
		Probe Probe 2 3/4 Centralizer	2.88	2.75	20.00
CCL GR	3.63 0.83	GR-Probe275 (275_070818) Probe Gamma Ray CCL Analog Bottom Det.	4.58	2.75	57.00

Schematic

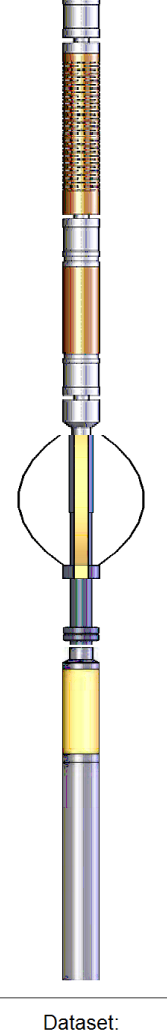

Dataset: fergusonno3k2.db: field/well/run1/merge1

Total Length:	20.08 ft
Total Weight:	199.00 lb
O.D.	2.75 in

Company	Red Mesa
Well	Furguson No.3 #K-2
Field	Red Mesa
County	La Plata
State	Colorado