

VERDAD RESOURCES

WATTENBERG FIELD

1N-64W-19 ONION 1918 PAD

ONION 1918-06H

Plan A

Plan: Permit Rev-1

Standard Planning Report

10 March, 2022

Project: WATTENBERG FIELD
Site: 1N-64W-19 ONION 1918 PAD
Well: ONION 1918-06H
Wellbore: Plan A
Design: Permit Rev-1

VERDAD RESOURCES

CASING DETAILS

TVD	MD	Name	Size
2156.00	2185.61	9 5/8"	9-5/8


SHL
2075' FSL
1771' FWL

TPZ
2180' FNL
2121' FEL

BPZ
460' FNL
2044' FEL

BHL
370' FNL
2042' FEL

West(-)/East(+) (2200 usft/in)


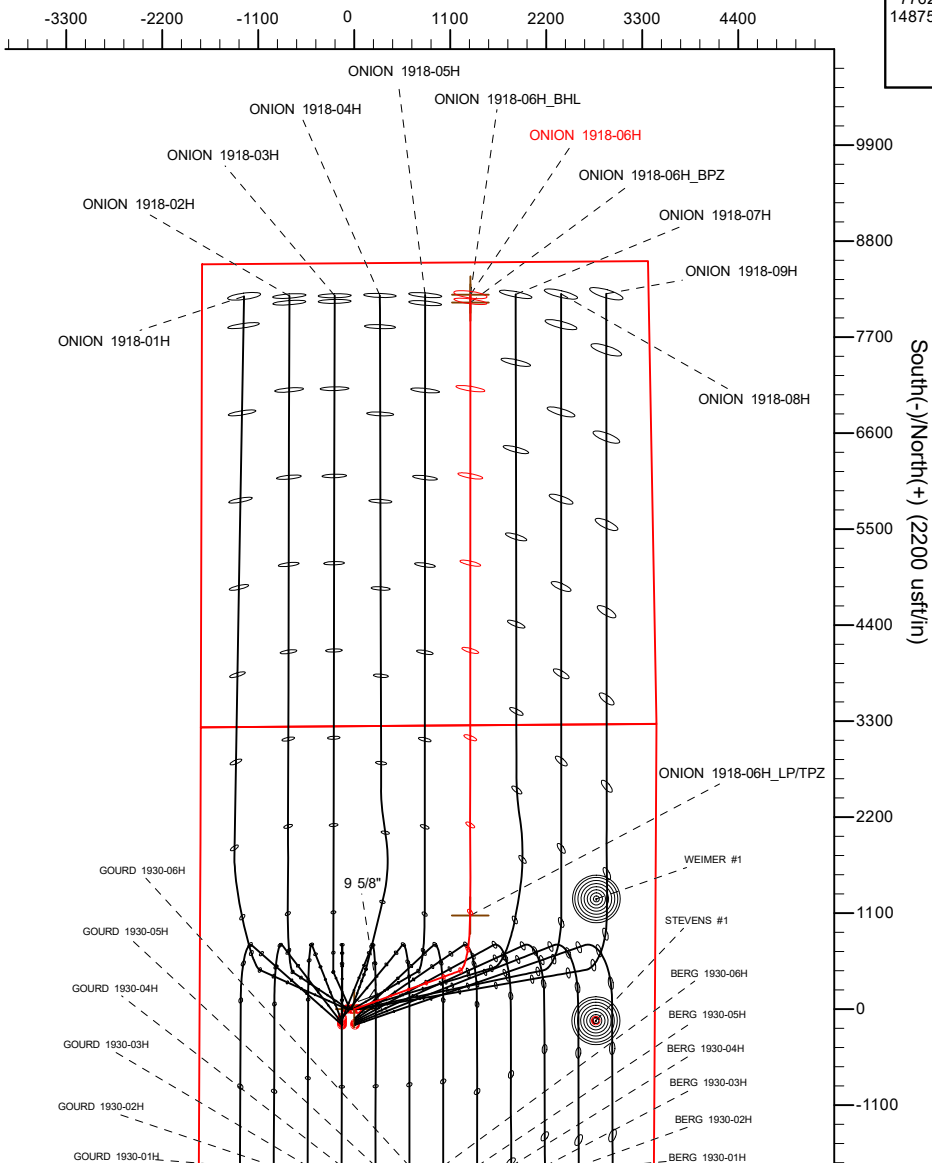


SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	
1119.00	12.38	70.07	1114.19	22.71	62.62	2.00	70.07	22.73	
6809.24	12.38	70.07	6672.12	438.56	1209.52	0.00	0.00	438.98	
7762.63	90.00	0.02	7250.00	1073.42	1328.98	9.00	-70.48	1073.89	
14875.90	90.00	0.02	7250.00	8186.70	1331.65	0.00	0.00	8187.17	ONION 1918-06H_BHL

WELLBORE TARGET DETAILS (LAT/LONG)

Name	TVD	+N/-S	+E/-W	Latitude	Longitude
ONION 1918-06H_SHL	0.00	0.00	0.00	40.035251	-104.596483
ONION 1918-06H_LP/TPZ	7250.00	1073.42	1328.98	40.038198	-104.591737
ONION 1918-06H_BPZ	7250.00	8096.69	1331.60	40.057478	-104.591726
ONION 1918-06H_BHL	7250.00	8186.70	1331.65	40.057725	-104.591725

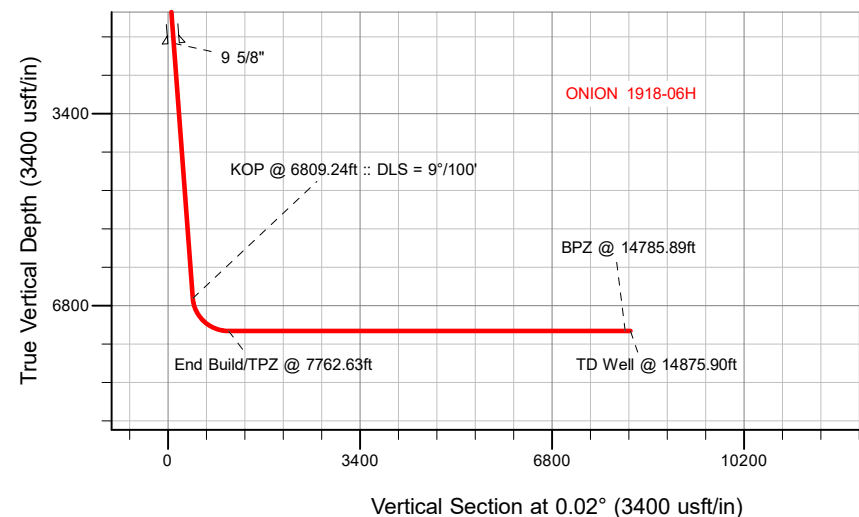

WELL DETAILS: ONION 1918-06H

GL = 5011'

RKB = 24' @ 5035.00usft (RIG)

Plan: Permit Rev-1 (ONION 1918-06H/Plan A)

Date: 3/10/2022

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well ONION 1918-06H
Company:	VERDAD RESOURCES	TVD Reference:	RKB = 24' @ 5035.00usft (RIG)
Project:	WATTENBERG FIELD	MD Reference:	RKB = 24' @ 5035.00usft (RIG)
Site:	1N-64W-19 ONION 1918 PAD	North Reference:	True
Well:	ONION 1918-06H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Project	WATTENBERG FIELD		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Northern Zone		

Site		1N-64W-19 ONION 1918 PAD				
Site Position:		Northing:	1,256,565.51	usft	Latitude:	40.034126
From:	Lat/Long	Easting:	3,252,854.15	usft	Longitude:	-104.596977
Position Uncertainty:		0.00	usft	Slot Radius:	13-3/16	"

Well		ONION 1918-06H				
Well Position	+N/-S	0.00 usft	Northing:	1,256,976.84 usft	Latitude:	40.035251
	+E/-W	0.00 usft	Easting:	3,252,988.40 usft	Longitude:	-104.596483
Position Uncertainty		3.28 usft	Wellhead Elevation:	usft	Ground Level:	5,011.00 usft
Grid Convergence:		0.58 °				

Wellbore	Plan A				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF202013	3/8/2022	7.65	66.36	51,701.70278665

Design	Permit Rev-1				
Audit Notes:					
Version:		Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	0.02	

Plan Survey Tool Program	Date	3/10/2022			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	2,156.00	Permit Rev-1 (Plan A)	ISCWSA MWD	
				Fixed:v2:standard declination	
2	2,156.00	14,875.90	Permit Rev-1 (Plan A)	ISCWSA MWD	
				Fixed:v2:standard declination	

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well ONION 1918-06H
Company:	VERDAD RESOURCES	TVD Reference:	RKB = 24' @ 5035.00usft (RIG)
Project:	WATTENBERG FIELD	MD Reference:	RKB = 24' @ 5035.00usft (RIG)
Site:	1N-64W-19 ONION 1918 PAD	North Reference:	True
Well:	ONION 1918-06H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,119.00	12.38	70.07	1,114.19	22.71	62.62	2.00	2.00	0.00	70.07	
6,809.24	12.38	70.07	6,672.12	438.56	1,209.52	0.00	0.00	0.00	0.00	
7,762.63	90.00	0.02	7,250.00	1,073.42	1,328.98	9.00	8.14	-7.35	-70.48	
14,875.90	90.00	0.02	7,250.00	8,186.70	1,331.65	0.00	0.00	0.00	0.00	ONION 1918-06H_BH

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well ONION 1918-06H
Company:	VERDAD RESOURCES	TVD Reference:	RKB = 24' @ 5035.00usft (RIG)
Project:	WATTENBERG FIELD	MD Reference:	RKB = 24' @ 5035.00usft (RIG)
Site:	1N-64W-19 ONION 1918 PAD	North Reference:	True
Well:	ONION 1918-06H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
Begin Nudge @ 500.00ft									
600.00	2.00	70.07	599.98	0.59	1.64	0.60	2.00	2.00	0.00
700.00	4.00	70.07	699.84	2.38	6.56	2.38	2.00	2.00	0.00
800.00	6.00	70.07	799.45	5.35	14.75	5.35	2.00	2.00	0.00
900.00	8.00	70.07	898.70	9.50	26.21	9.51	2.00	2.00	0.00
1,000.00	10.00	70.07	997.47	14.84	40.92	14.85	2.00	2.00	0.00
1,100.00	12.00	70.07	1,095.62	21.34	58.85	21.36	2.00	2.00	0.00
1,119.00	12.38	70.07	1,114.19	22.71	62.62	22.73	2.00	2.00	0.00
Hold Tangent @ 1119.00ft									
1,200.00	12.38	70.07	1,193.31	28.63	78.95	28.65	0.00	0.00	0.00
1,300.00	12.38	70.07	1,290.99	35.93	99.11	35.97	0.00	0.00	0.00
1,400.00	12.38	70.07	1,388.66	43.24	119.26	43.28	0.00	0.00	0.00
1,500.00	12.38	70.07	1,486.34	50.55	139.42	50.60	0.00	0.00	0.00
1,600.00	12.38	70.07	1,584.01	57.86	159.57	57.91	0.00	0.00	0.00
1,700.00	12.38	70.07	1,681.68	65.17	179.73	65.23	0.00	0.00	0.00
1,800.00	12.38	70.07	1,779.36	72.48	199.88	72.54	0.00	0.00	0.00
1,900.00	12.38	70.07	1,877.03	79.78	220.04	79.86	0.00	0.00	0.00
2,000.00	12.38	70.07	1,974.71	87.09	240.19	87.18	0.00	0.00	0.00
2,100.00	12.38	70.07	2,072.38	94.40	260.35	94.49	0.00	0.00	0.00
2,185.61	12.38	70.07	2,156.00	100.66	277.60	100.75	0.00	0.00	0.00
9 5/8"									
2,200.00	12.38	70.07	2,170.06	101.71	280.51	101.81	0.00	0.00	0.00
2,300.00	12.38	70.07	2,267.73	109.02	300.66	109.12	0.00	0.00	0.00
2,400.00	12.38	70.07	2,365.41	116.32	320.82	116.44	0.00	0.00	0.00
2,500.00	12.38	70.07	2,463.08	123.63	340.97	123.75	0.00	0.00	0.00
2,600.00	12.38	70.07	2,560.76	130.94	361.13	131.07	0.00	0.00	0.00
2,700.00	12.38	70.07	2,658.43	138.25	381.28	138.38	0.00	0.00	0.00
2,800.00	12.38	70.07	2,756.11	145.56	401.44	145.70	0.00	0.00	0.00
2,900.00	12.38	70.07	2,853.78	152.86	421.59	153.01	0.00	0.00	0.00
3,000.00	12.38	70.07	2,951.46	160.17	441.75	160.33	0.00	0.00	0.00
3,100.00	12.38	70.07	3,049.13	167.48	461.90	167.64	0.00	0.00	0.00
3,200.00	12.38	70.07	3,146.81	174.79	482.06	174.96	0.00	0.00	0.00
3,300.00	12.38	70.07	3,244.48	182.10	502.21	182.27	0.00	0.00	0.00
3,400.00	12.38	70.07	3,342.16	189.40	522.37	189.59	0.00	0.00	0.00
3,500.00	12.38	70.07	3,439.83	196.71	542.53	196.90	0.00	0.00	0.00
3,600.00	12.38	70.07	3,537.50	204.02	562.68	204.22	0.00	0.00	0.00
3,700.00	12.38	70.07	3,635.18	211.33	582.84	211.53	0.00	0.00	0.00
3,800.00	12.38	70.07	3,732.85	218.64	602.99	218.85	0.00	0.00	0.00
3,900.00	12.38	70.07	3,830.53	225.95	623.15	226.16	0.00	0.00	0.00
4,000.00	12.38	70.07	3,928.20	233.25	643.30	233.48	0.00	0.00	0.00
4,100.00	12.38	70.07	4,025.88	240.56	663.46	240.79	0.00	0.00	0.00
4,200.00	12.38	70.07	4,123.55	247.87	683.61	248.11	0.00	0.00	0.00
4,300.00	12.38	70.07	4,221.23	255.18	703.77	255.42	0.00	0.00	0.00
4,400.00	12.38	70.07	4,318.90	262.49	723.92	262.74	0.00	0.00	0.00
4,500.00	12.38	70.07	4,416.58	269.79	744.08	270.05	0.00	0.00	0.00
4,600.00	12.38	70.07	4,514.25	277.10	764.24	277.37	0.00	0.00	0.00
4,700.00	12.38	70.07	4,611.93	284.41	784.39	284.68	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well ONION 1918-06H
Company:	VERDAD RESOURCES	TVD Reference:	RKB = 24' @ 5035.00usft (RIG)
Project:	WATTENBERG FIELD	MD Reference:	RKB = 24' @ 5035.00usft (RIG)
Site:	1N-64W-19 ONION 1918 PAD	North Reference:	True
Well:	ONION 1918-06H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,800.00	12.38	70.07	4,709.60	291.72	804.55	292.00	0.00	0.00	0.00
4,900.00	12.38	70.07	4,807.28	299.03	824.70	299.31	0.00	0.00	0.00
5,000.00	12.38	70.07	4,904.95	306.33	844.86	306.63	0.00	0.00	0.00
5,100.00	12.38	70.07	5,002.63	313.64	865.01	313.94	0.00	0.00	0.00
5,200.00	12.38	70.07	5,100.30	320.95	885.17	321.26	0.00	0.00	0.00
5,300.00	12.38	70.07	5,197.97	328.26	905.32	328.57	0.00	0.00	0.00
5,400.00	12.38	70.07	5,295.65	335.57	925.48	335.89	0.00	0.00	0.00
5,500.00	12.38	70.07	5,393.32	342.87	945.63	343.20	0.00	0.00	0.00
5,600.00	12.38	70.07	5,491.00	350.18	965.79	350.52	0.00	0.00	0.00
5,700.00	12.38	70.07	5,588.67	357.49	985.94	357.84	0.00	0.00	0.00
5,800.00	12.38	70.07	5,686.35	364.80	1,006.10	365.15	0.00	0.00	0.00
5,900.00	12.38	70.07	5,784.02	372.11	1,026.26	372.47	0.00	0.00	0.00
6,000.00	12.38	70.07	5,881.70	379.42	1,046.41	379.78	0.00	0.00	0.00
6,100.00	12.38	70.07	5,979.37	386.72	1,066.57	387.10	0.00	0.00	0.00
6,200.00	12.38	70.07	6,077.05	394.03	1,086.72	394.41	0.00	0.00	0.00
6,300.00	12.38	70.07	6,174.72	401.34	1,106.88	401.73	0.00	0.00	0.00
6,400.00	12.38	70.07	6,272.40	408.65	1,127.03	409.04	0.00	0.00	0.00
6,500.00	12.38	70.07	6,370.07	415.96	1,147.19	416.36	0.00	0.00	0.00
6,600.00	12.38	70.07	6,467.75	423.26	1,167.34	423.67	0.00	0.00	0.00
6,700.00	12.38	70.07	6,565.42	430.57	1,187.50	430.99	0.00	0.00	0.00
6,809.24	12.38	70.07	6,672.12	438.56	1,209.52	438.98	0.00	0.00	0.00
KOP @ 6809.24ft :: DLS = 9°/100'									
6,850.00	14.03	55.67	6,711.81	442.83	1,217.71	443.26	9.00	4.05	-35.33
6,900.00	16.93	42.69	6,760.01	451.61	1,227.66	452.04	9.00	5.80	-25.95
6,950.00	20.40	33.71	6,807.38	464.22	1,237.43	464.65	9.00	6.95	-17.97
7,000.00	24.21	27.34	6,853.64	480.58	1,246.98	481.02	9.00	7.60	-12.74
7,050.00	28.20	22.65	6,898.49	500.60	1,256.25	501.04	9.00	8.00	-9.39
7,100.00	32.32	19.05	6,941.67	524.15	1,265.16	524.59	9.00	8.24	-7.19
7,150.00	36.53	16.20	6,982.91	551.09	1,273.68	551.53	9.00	8.40	-5.71
7,200.00	40.78	13.86	7,021.95	581.25	1,281.75	581.70	9.00	8.51	-4.67
7,250.00	45.08	11.89	7,058.55	614.44	1,289.31	614.89	9.00	8.59	-3.93
7,300.00	49.41	10.21	7,092.49	650.47	1,296.33	650.92	9.00	8.65	-3.38
7,350.00	53.75	8.72	7,123.55	689.10	1,302.75	689.55	9.00	8.70	-2.97
7,400.00	58.12	7.40	7,151.55	730.10	1,308.54	730.56	9.00	8.73	-2.65
7,450.00	62.49	6.19	7,176.32	773.22	1,313.67	773.68	9.00	8.75	-2.41
7,500.00	66.88	5.08	7,197.69	818.19	1,318.10	818.65	9.00	8.77	-2.23
7,550.00	71.27	4.03	7,215.54	864.73	1,321.80	865.19	9.00	8.79	-2.09
7,600.00	75.67	3.04	7,229.76	912.56	1,324.75	913.03	9.00	8.80	-1.98
7,650.00	80.07	2.09	7,240.26	961.39	1,326.93	961.85	9.00	8.81	-1.90
7,700.00	84.48	1.16	7,246.98	1,010.90	1,328.34	1,011.36	9.00	8.81	-1.85
7,750.00	88.89	0.25	7,249.87	1,060.80	1,328.95	1,061.26	9.00	8.81	-1.83
7,762.63	90.00	0.02	7,250.00	1,073.42	1,328.98	1,073.89	9.00	8.81	-1.82
End Build/TPZ @ 7762.63ft									
7,800.00	90.00	0.02	7,250.00	1,110.80	1,329.00	1,111.26	0.00	0.00	0.00
7,900.00	90.00	0.02	7,250.00	1,210.80	1,329.04	1,211.26	0.00	0.00	0.00
8,000.00	90.00	0.02	7,250.00	1,310.80	1,329.07	1,311.26	0.00	0.00	0.00
8,100.00	90.00	0.02	7,250.00	1,410.80	1,329.11	1,411.26	0.00	0.00	0.00
8,200.00	90.00	0.02	7,250.00	1,510.80	1,329.15	1,511.26	0.00	0.00	0.00
8,300.00	90.00	0.02	7,250.00	1,610.80	1,329.19	1,611.26	0.00	0.00	0.00
8,400.00	90.00	0.02	7,250.00	1,710.80	1,329.22	1,711.26	0.00	0.00	0.00
8,500.00	90.00	0.02	7,250.00	1,810.80	1,329.26	1,811.26	0.00	0.00	0.00
8,600.00	90.00	0.02	7,250.00	1,910.80	1,329.30	1,911.26	0.00	0.00	0.00
8,700.00	90.00	0.02	7,250.00	2,010.80	1,329.34	2,011.26	0.00	0.00	0.00
8,800.00	90.00	0.02	7,250.00	2,110.80	1,329.37	2,111.26	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well ONION 1918-06H
Company:	VERDAD RESOURCES	TVD Reference:	RKB = 24' @ 5035.00usft (RIG)
Project:	WATTENBERG FIELD	MD Reference:	RKB = 24' @ 5035.00usft (RIG)
Site:	1N-64W-19 ONION 1918 PAD	North Reference:	True
Well:	ONION 1918-06H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
8,900.00	90.00	0.02	7,250.00	2,210.80	1,329.41	2,211.26	0.00	0.00	0.00	
9,000.00	90.00	0.02	7,250.00	2,310.80	1,329.45	2,311.26	0.00	0.00	0.00	
9,100.00	90.00	0.02	7,250.00	2,410.80	1,329.48	2,411.26	0.00	0.00	0.00	
9,200.00	90.00	0.02	7,250.00	2,510.80	1,329.52	2,511.26	0.00	0.00	0.00	
9,300.00	90.00	0.02	7,250.00	2,610.80	1,329.56	2,611.26	0.00	0.00	0.00	
9,400.00	90.00	0.02	7,250.00	2,710.80	1,329.60	2,711.26	0.00	0.00	0.00	
9,500.00	90.00	0.02	7,250.00	2,810.80	1,329.63	2,811.26	0.00	0.00	0.00	
9,600.00	90.00	0.02	7,250.00	2,910.80	1,329.67	2,911.26	0.00	0.00	0.00	
9,700.00	90.00	0.02	7,250.00	3,010.80	1,329.71	3,011.26	0.00	0.00	0.00	
9,800.00	90.00	0.02	7,250.00	3,110.80	1,329.75	3,111.26	0.00	0.00	0.00	
9,900.00	90.00	0.02	7,250.00	3,210.80	1,329.78	3,211.26	0.00	0.00	0.00	
10,000.00	90.00	0.02	7,250.00	3,310.80	1,329.82	3,311.26	0.00	0.00	0.00	
10,100.00	90.00	0.02	7,250.00	3,410.80	1,329.86	3,411.26	0.00	0.00	0.00	
10,200.00	90.00	0.02	7,250.00	3,510.80	1,329.90	3,511.26	0.00	0.00	0.00	
10,300.00	90.00	0.02	7,250.00	3,610.80	1,329.93	3,611.26	0.00	0.00	0.00	
10,400.00	90.00	0.02	7,250.00	3,710.80	1,329.97	3,711.26	0.00	0.00	0.00	
10,500.00	90.00	0.02	7,250.00	3,810.80	1,330.01	3,811.26	0.00	0.00	0.00	
10,600.00	90.00	0.02	7,250.00	3,910.80	1,330.05	3,911.26	0.00	0.00	0.00	
10,700.00	90.00	0.02	7,250.00	4,010.80	1,330.08	4,011.26	0.00	0.00	0.00	
10,800.00	90.00	0.02	7,250.00	4,110.80	1,330.12	4,111.26	0.00	0.00	0.00	
10,900.00	90.00	0.02	7,250.00	4,210.80	1,330.16	4,211.26	0.00	0.00	0.00	
11,000.00	90.00	0.02	7,250.00	4,310.80	1,330.20	4,311.26	0.00	0.00	0.00	
11,100.00	90.00	0.02	7,250.00	4,410.80	1,330.23	4,411.26	0.00	0.00	0.00	
11,200.00	90.00	0.02	7,250.00	4,510.80	1,330.27	4,511.26	0.00	0.00	0.00	
11,300.00	90.00	0.02	7,250.00	4,610.80	1,330.31	4,611.26	0.00	0.00	0.00	
11,400.00	90.00	0.02	7,250.00	4,710.80	1,330.35	4,711.26	0.00	0.00	0.00	
11,500.00	90.00	0.02	7,250.00	4,810.80	1,330.38	4,811.26	0.00	0.00	0.00	
11,600.00	90.00	0.02	7,250.00	4,910.80	1,330.42	4,911.26	0.00	0.00	0.00	
11,700.00	90.00	0.02	7,250.00	5,010.80	1,330.46	5,011.26	0.00	0.00	0.00	
11,800.00	90.00	0.02	7,250.00	5,110.80	1,330.50	5,111.26	0.00	0.00	0.00	
11,900.00	90.00	0.02	7,250.00	5,210.80	1,330.53	5,211.26	0.00	0.00	0.00	
12,000.00	90.00	0.02	7,250.00	5,310.80	1,330.57	5,311.26	0.00	0.00	0.00	
12,100.00	90.00	0.02	7,250.00	5,410.80	1,330.61	5,411.26	0.00	0.00	0.00	
12,200.00	90.00	0.02	7,250.00	5,510.80	1,330.65	5,511.26	0.00	0.00	0.00	
12,300.00	90.00	0.02	7,250.00	5,610.80	1,330.68	5,611.26	0.00	0.00	0.00	
12,400.00	90.00	0.02	7,250.00	5,710.80	1,330.72	5,711.26	0.00	0.00	0.00	
12,500.00	90.00	0.02	7,250.00	5,810.80	1,330.76	5,811.26	0.00	0.00	0.00	
12,600.00	90.00	0.02	7,250.00	5,910.80	1,330.79	5,911.26	0.00	0.00	0.00	
12,700.00	90.00	0.02	7,250.00	6,010.80	1,330.83	6,011.26	0.00	0.00	0.00	
12,800.00	90.00	0.02	7,250.00	6,110.80	1,330.87	6,111.26	0.00	0.00	0.00	
12,900.00	90.00	0.02	7,250.00	6,210.80	1,330.91	6,211.26	0.00	0.00	0.00	
13,000.00	90.00	0.02	7,250.00	6,310.80	1,330.94	6,311.26	0.00	0.00	0.00	
13,100.00	90.00	0.02	7,250.00	6,410.80	1,330.98	6,411.26	0.00	0.00	0.00	
13,200.00	90.00	0.02	7,250.00	6,510.80	1,331.02	6,511.26	0.00	0.00	0.00	
13,300.00	90.00	0.02	7,250.00	6,610.80	1,331.06	6,611.26	0.00	0.00	0.00	
13,400.00	90.00	0.02	7,250.00	6,710.80	1,331.09	6,711.26	0.00	0.00	0.00	
13,500.00	90.00	0.02	7,250.00	6,810.80	1,331.13	6,811.26	0.00	0.00	0.00	
13,600.00	90.00	0.02	7,250.00	6,910.80	1,331.17	6,911.26	0.00	0.00	0.00	
13,700.00	90.00	0.02	7,250.00	7,010.80	1,331.21	7,011.26	0.00	0.00	0.00	
13,800.00	90.00	0.02	7,250.00	7,110.80	1,331.24	7,111.26	0.00	0.00	0.00	
13,900.00	90.00	0.02	7,250.00	7,210.80	1,331.28	7,211.26	0.00	0.00	0.00	
14,000.00	90.00	0.02	7,250.00	7,310.80	1,331.32	7,311.26	0.00	0.00	0.00	
14,100.00	90.00	0.02	7,250.00	7,410.80	1,331.36	7,411.26	0.00	0.00	0.00	
14,200.00	90.00	0.02	7,250.00	7,510.80	1,331.39	7,511.26	0.00	0.00	0.00	

Planning Report

Database:	EDM 5000.16 Single User Db	Local Co-ordinate Reference:	Well ONION 1918-06H
Company:	VERDAD RESOURCES	TVD Reference:	RKB = 24' @ 5035.00usft (RIG)
Project:	WATTENBERG FIELD	MD Reference:	RKB = 24' @ 5035.00usft (RIG)
Site:	1N-64W-19 ONION 1918 PAD	North Reference:	True
Well:	ONION 1918-06H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
14,300.00	90.00	0.02	7,250.00	7,610.80	1,331.43	7,611.26	0.00	0.00	0.00	
14,400.00	90.00	0.02	7,250.00	7,710.80	1,331.47	7,711.26	0.00	0.00	0.00	
14,500.00	90.00	0.02	7,250.00	7,810.80	1,331.51	7,811.26	0.00	0.00	0.00	
14,600.00	90.00	0.02	7,250.00	7,910.80	1,331.54	7,911.26	0.00	0.00	0.00	
14,700.00	90.00	0.02	7,250.00	8,010.80	1,331.58	8,011.26	0.00	0.00	0.00	
14,785.89	90.00	0.02	7,250.00	8,096.69	1,331.61	8,097.15	0.00	0.00	0.00	
BPZ @ 14785.89ft										
14,800.00	90.00	0.02	7,250.00	8,110.80	1,331.62	8,111.26	0.00	0.00	0.00	
14,875.90	90.00	0.02	7,250.00	8,186.70	1,331.65	8,187.17	0.00	0.00	0.00	
TD Well @ 14875.90ft										

Casing Points					
Measured Depth (usft)	Vertical Depth (usft)	Name		Casing Diameter (")	Hole Diameter (")
2,185.61	2,156.00	9 5/8"		9-5/8	13-1/2

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment	
		+N/-S (usft)	+E/-W (usft)		
500.00	500.00	0.00	0.00	Begin Nudge @ 500.00ft	
1,119.00	1,114.19	22.71	62.62	Hold Tangent @ 1119.00ft	
6,809.24	6,672.12	438.56	1,209.52	KOP @ 6809.24ft :: DLS = 9°/100'	
7,762.63	7,250.00	1,073.42	1,328.98	End Build/TPZ @ 7762.63ft	
14,785.89	7,250.00	8,096.69	1,331.61	BPZ @ 14785.89ft	
14,875.90	7,250.00	8,186.70	1,331.65	TD Well @ 14875.90ft	