GAMMA RAY, CEMENT BOND, VARIABLE DENSITY, CCL

Company	PDC ENERGY
Well	HURON 1N
Field	WATTENBERG
County	WELD
State	COLORADO

Company PDC ENERGY
Well HURON 1N
Field WATTENBERG
County WELD State COLORADO

Location: API # : 05-123-49586
329' FSL & 547' FEL
SE / SE
SEC 22 TWP 5N RGE 64W

Other Services

Permanent Datum	GL	Elevation 4598	Elevation
Log Measured From	KB		K.B.
Drilling Measured From	KB		D.F.
			G.L. 4598

Date	SEPTEMBER 23, 2021
Run Number	ONE
Depth Driller	
Depth Logger	6480
Bottom Logged Interval	6480'-0'
Top Log Interval	
Open Hole Size	
Type Fluid	
Density / Viscosity	
Max. Recorded Temp.	
Estimated Cement Top	
Time Well Ready	
Time Logger on Bottom	
Equipment Number	802
Location	KERSEY, CO
Recorded By	GREG NOLAN
Witnessed By	RYAN BEAM

Borehole Record				Tubing Record			
Run Number	Bit	From	To	Size	Weight	From	To

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String				
Prot. String				
Production String	5-1/2			
Liner				

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR CHOOSING SUREFIRE WIRELINE WEST!!!!
<NORTH>
O
O
O
O
X
<SOUTH>
X=HURON 1N

Database File	pdch1npatch.db
Dataset Pathname	pass3
Presentation Format	pdc
Dataset Creation	Thu Sep 23 10:39:13 2021
Charted by	Depth in Feet scaled 1:240

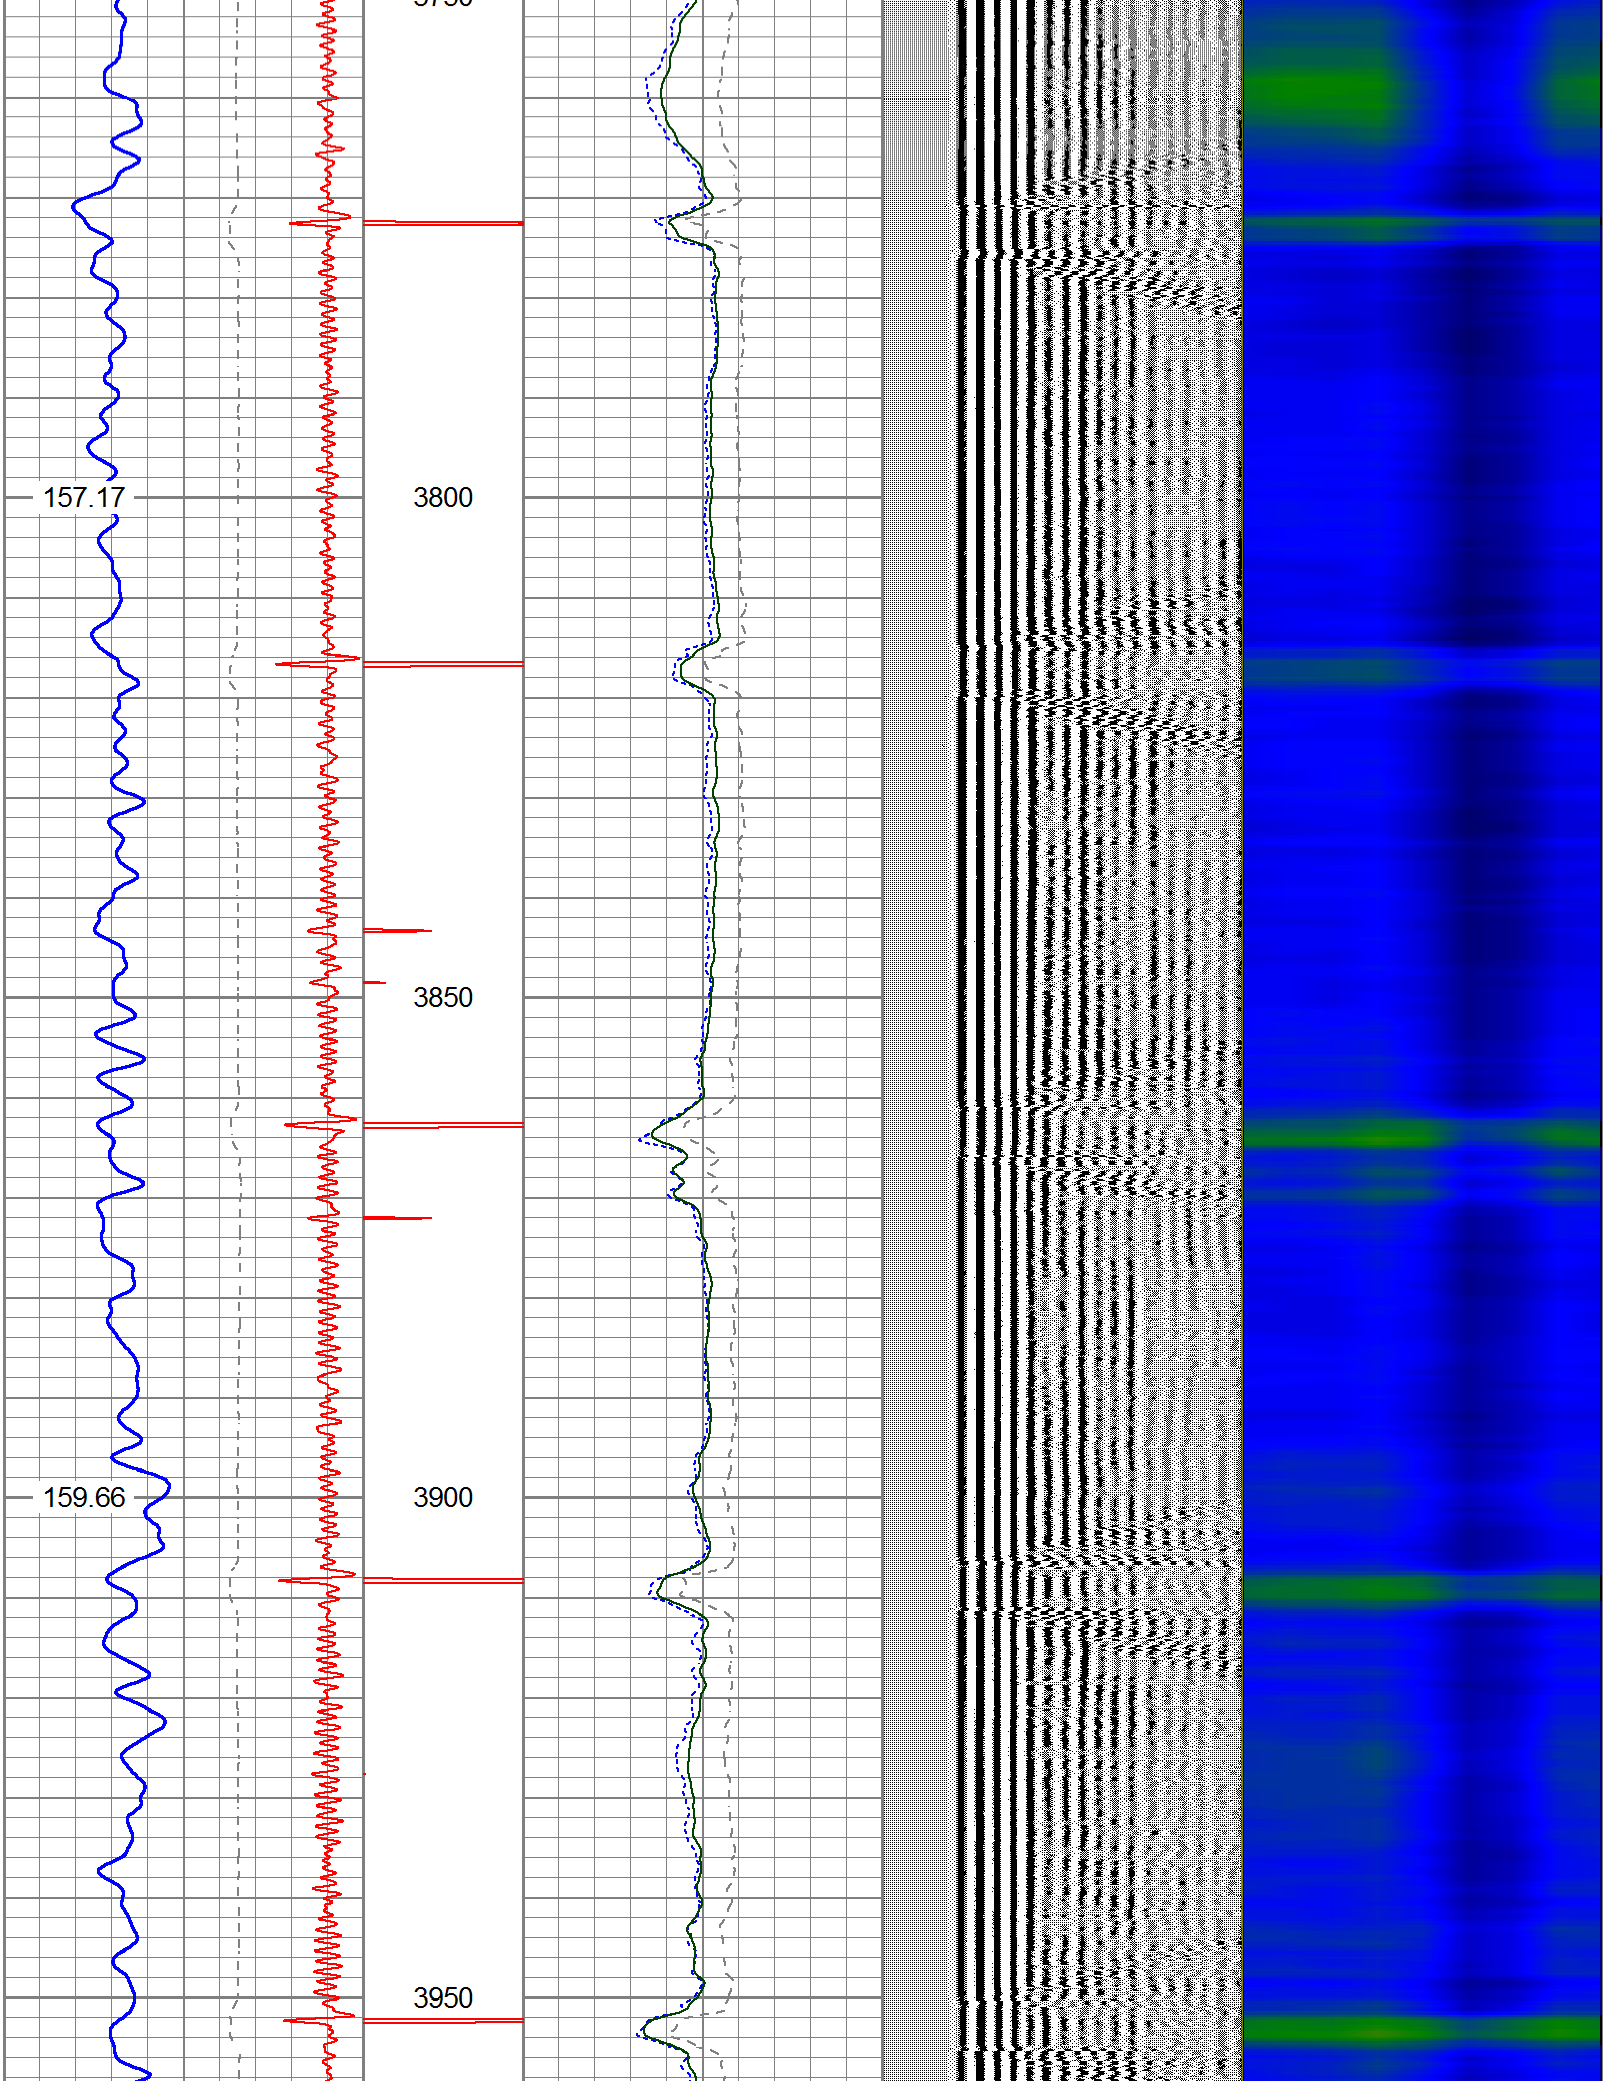
157.17
3800
3850
159.66
3900
3950

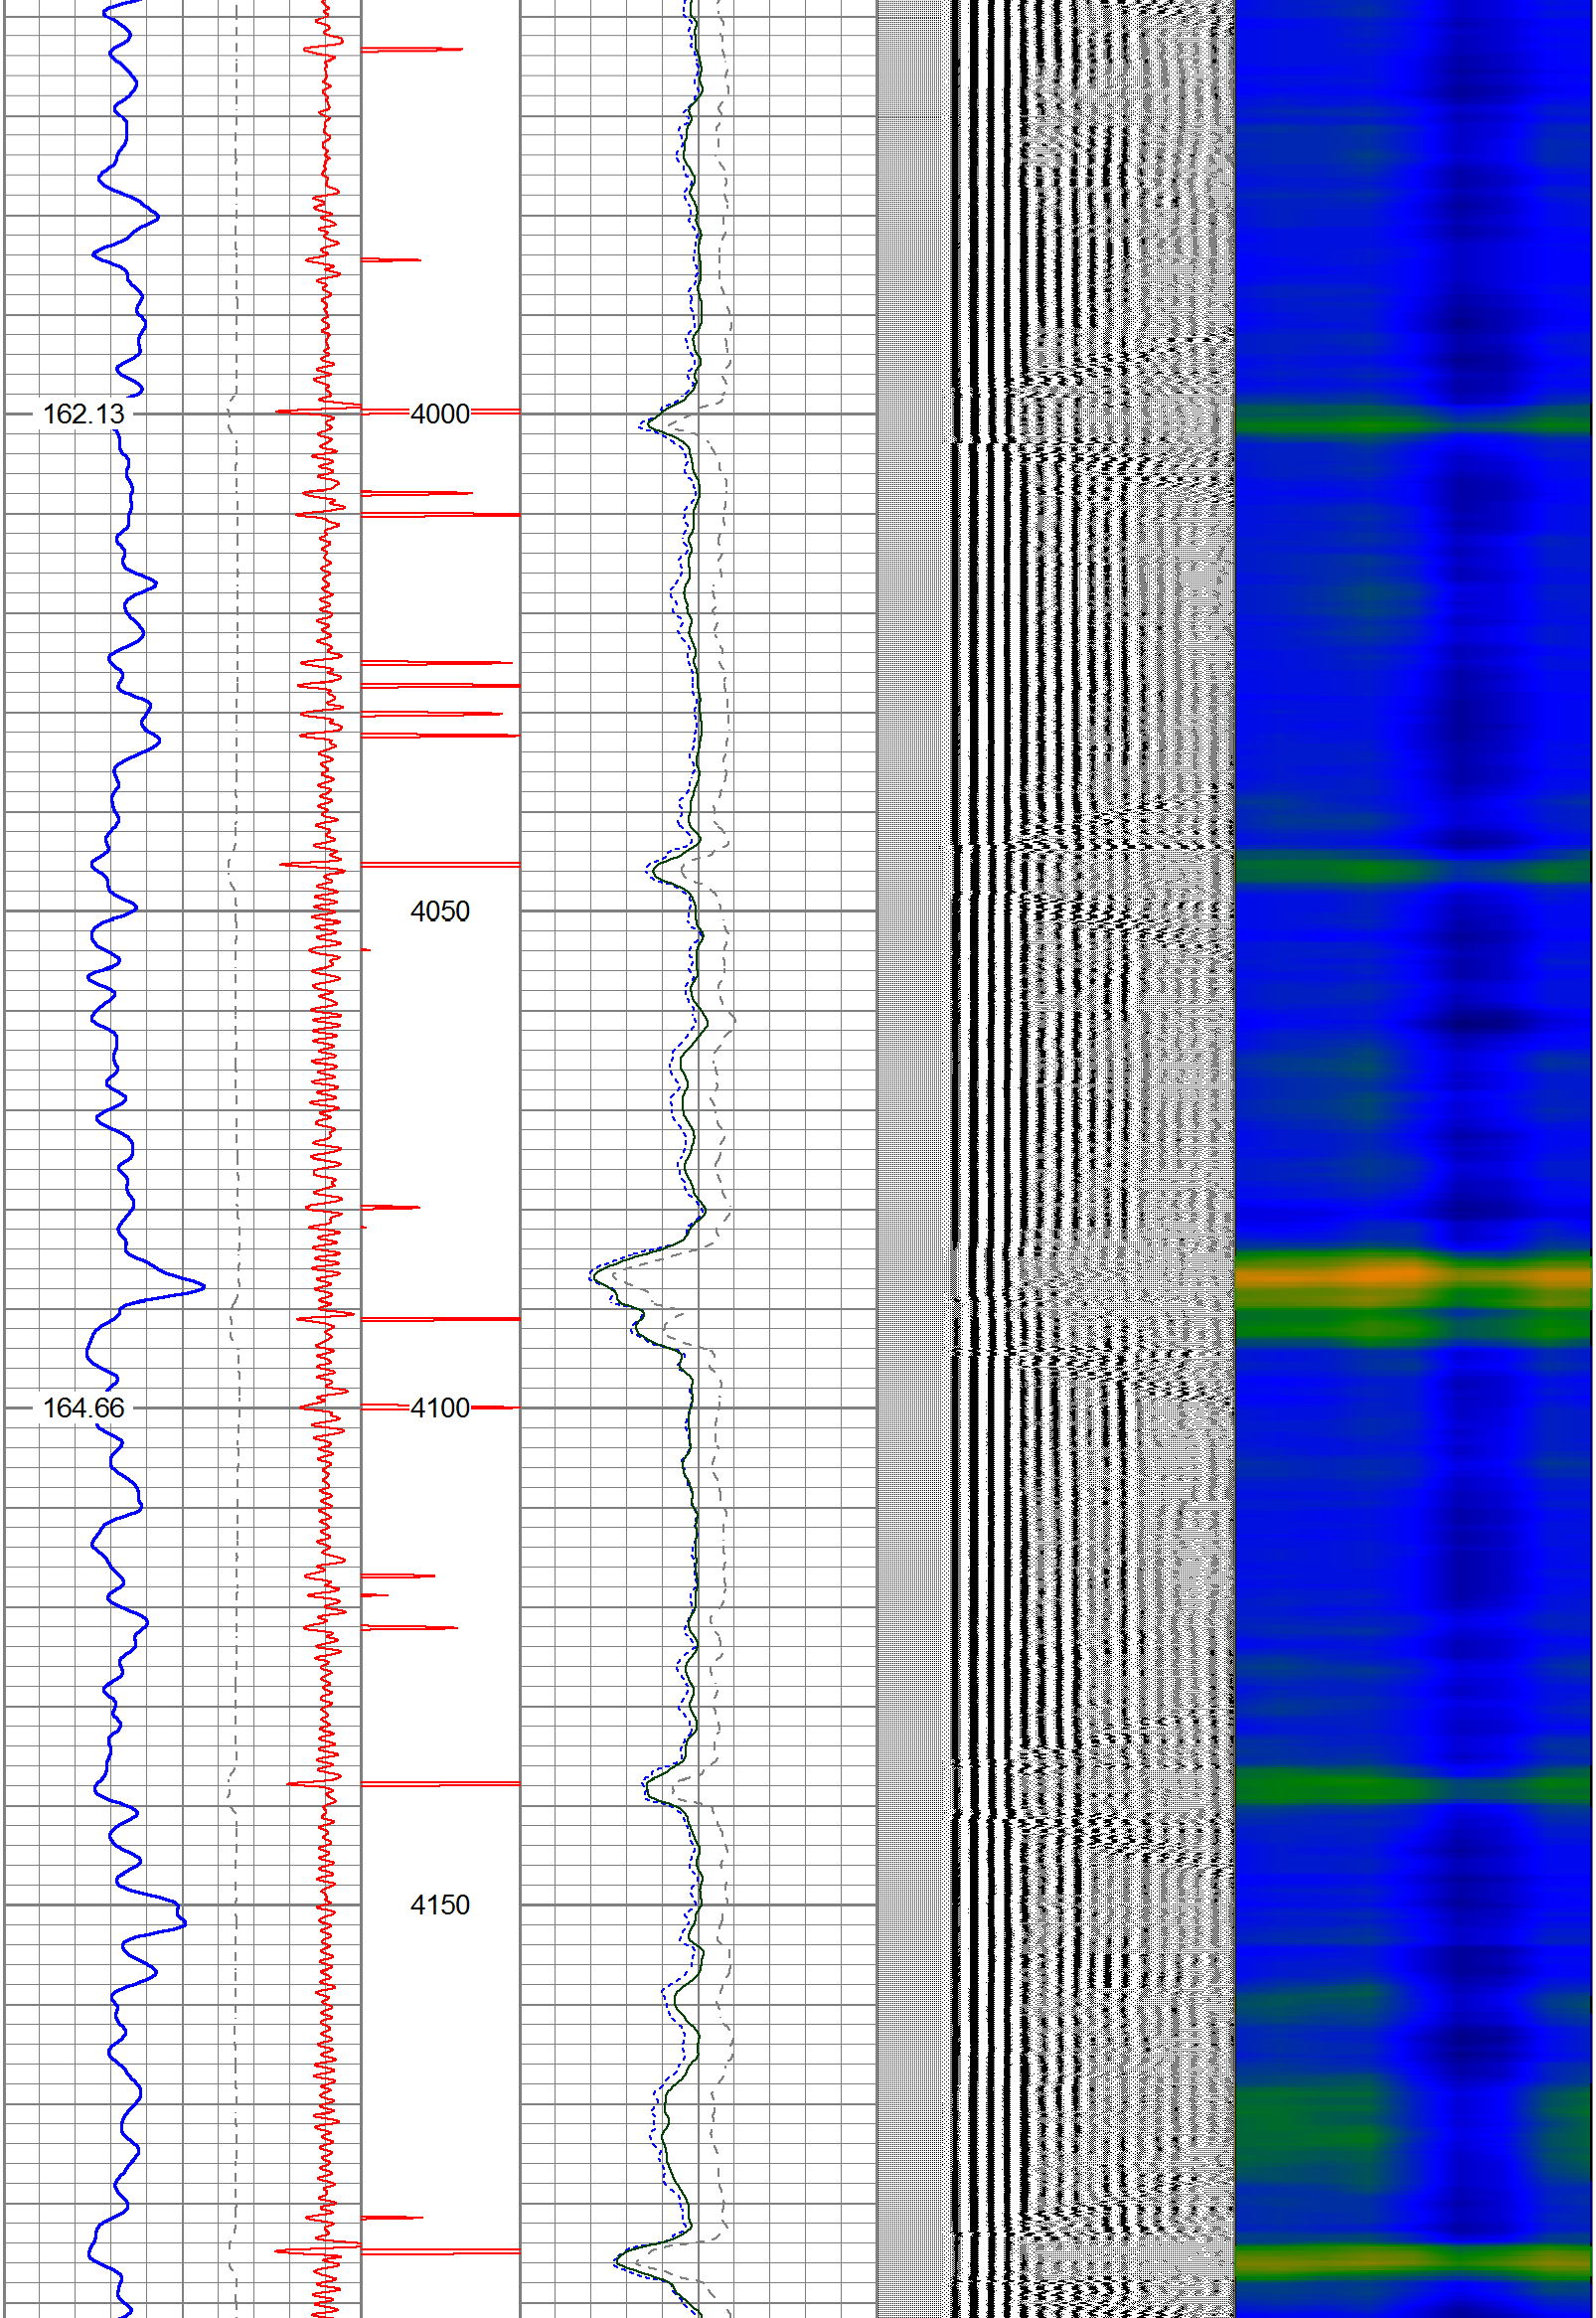
162.13
4000
4050
164.66
4100
4150

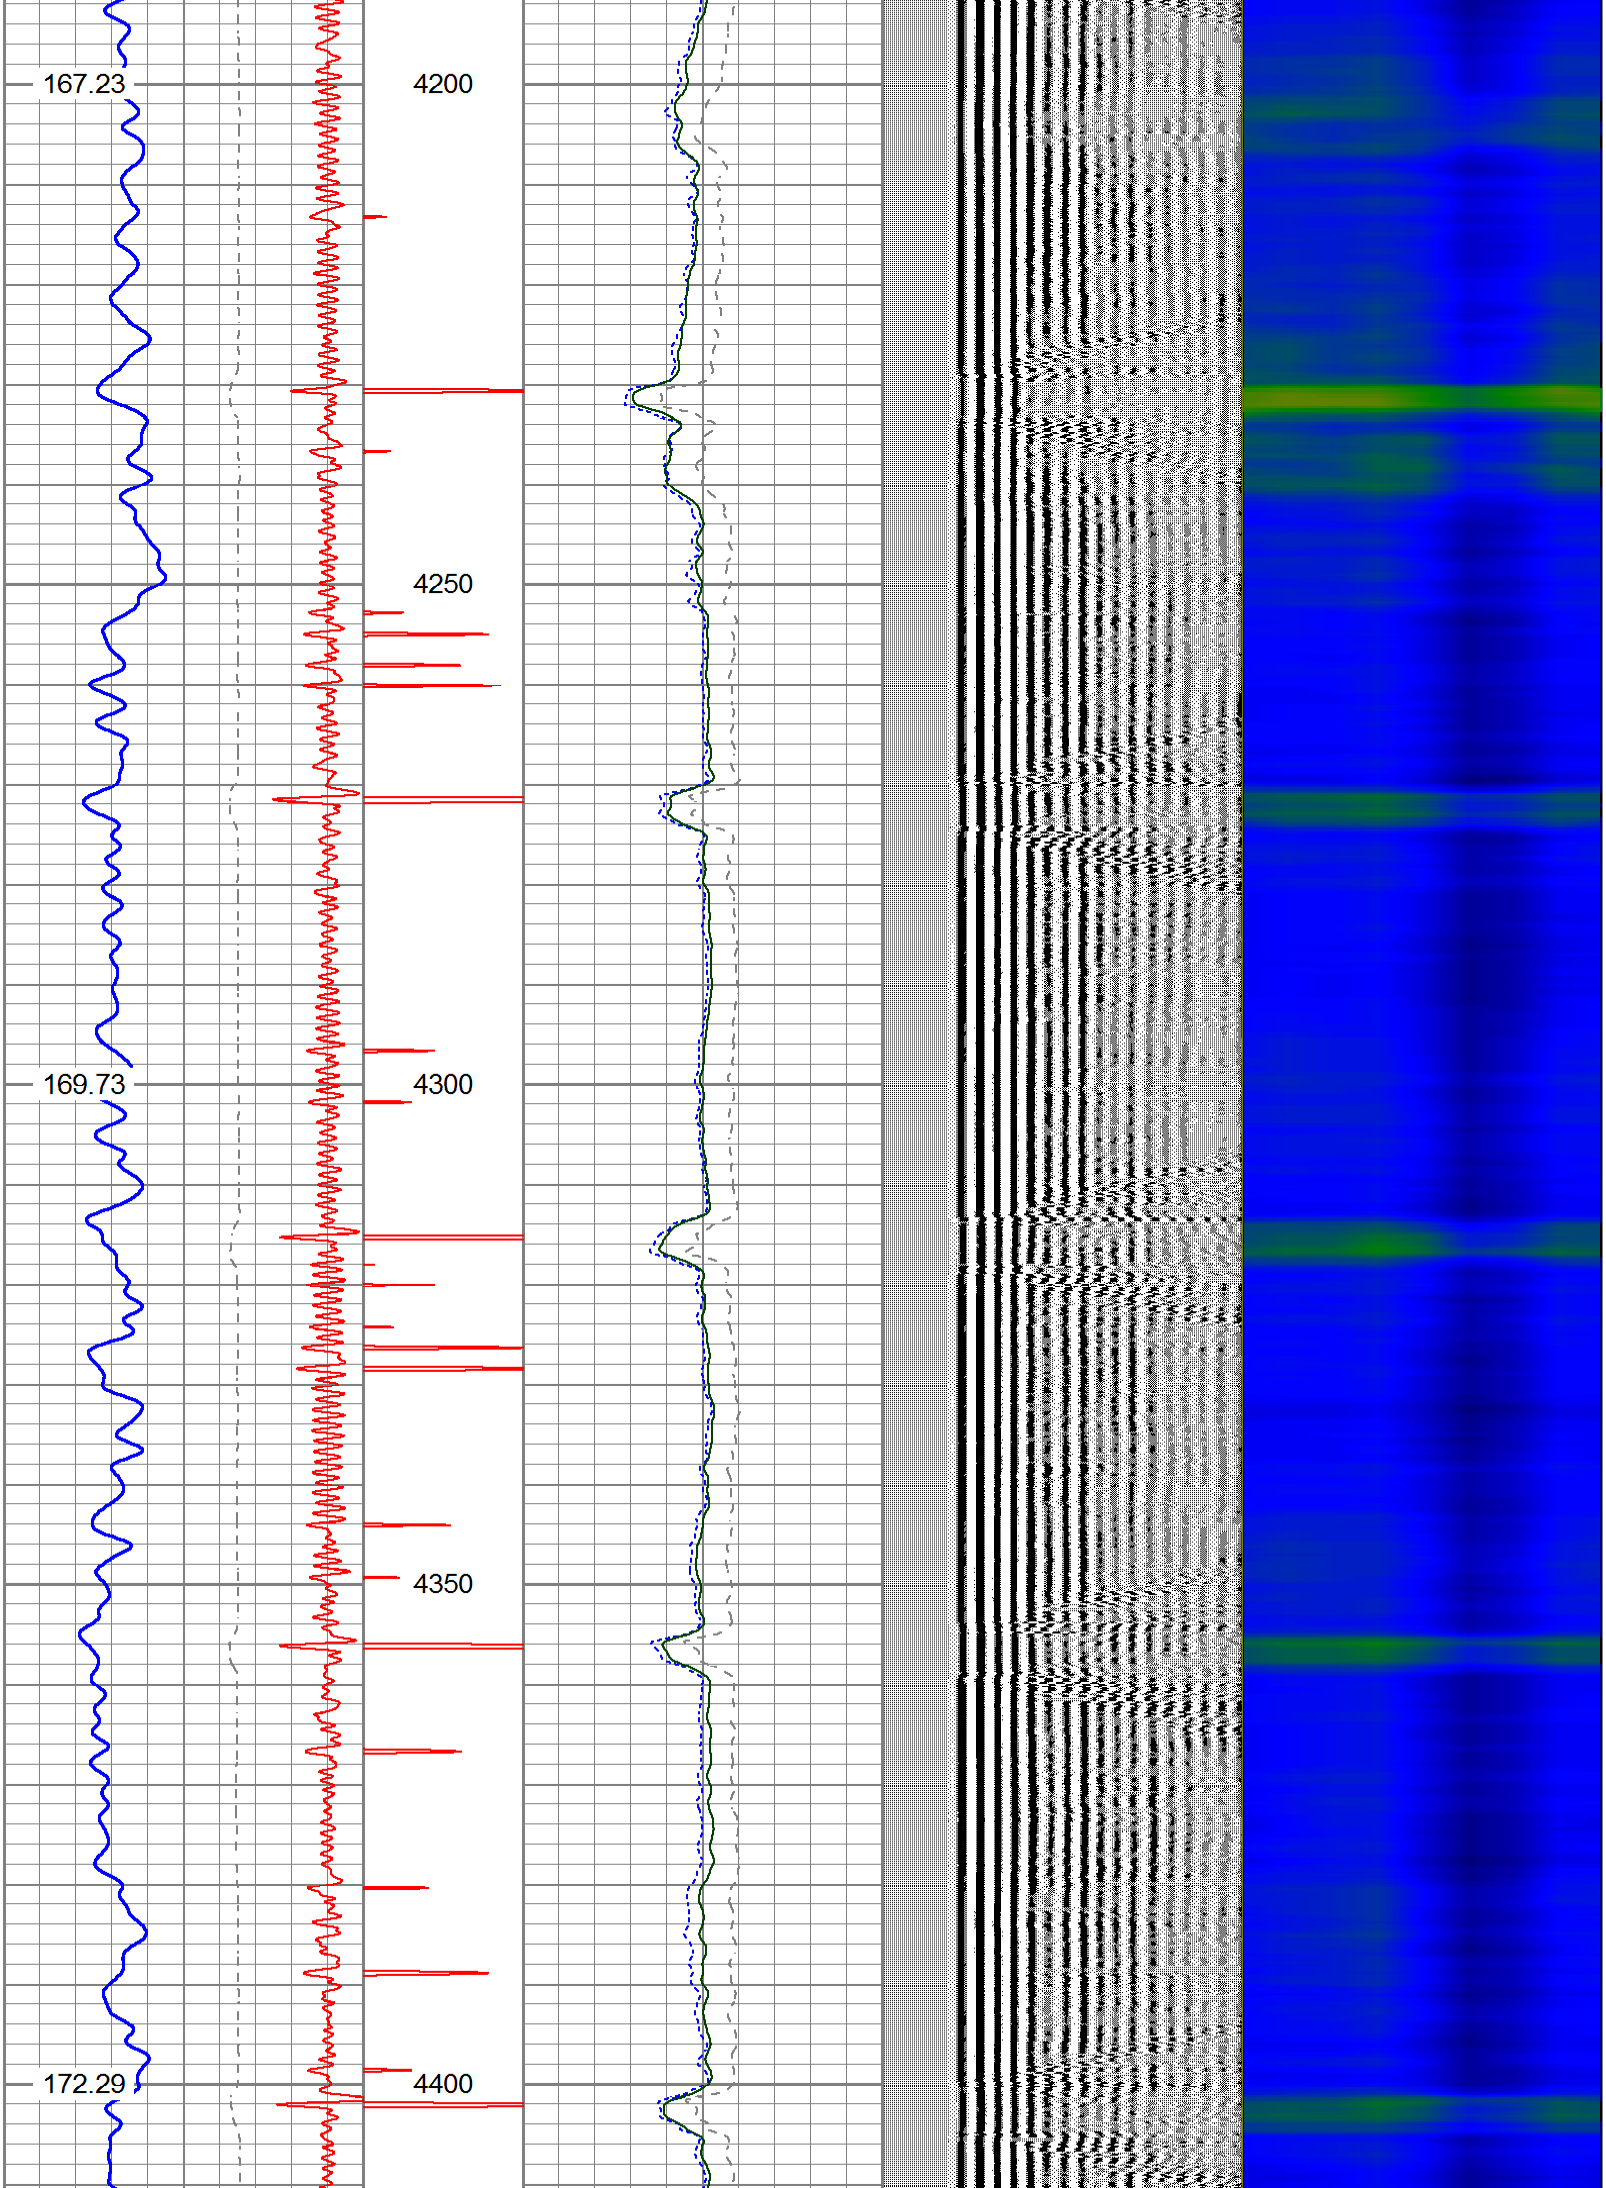
167.23
4200
4250
169.73
4300
4350
172.29
4400

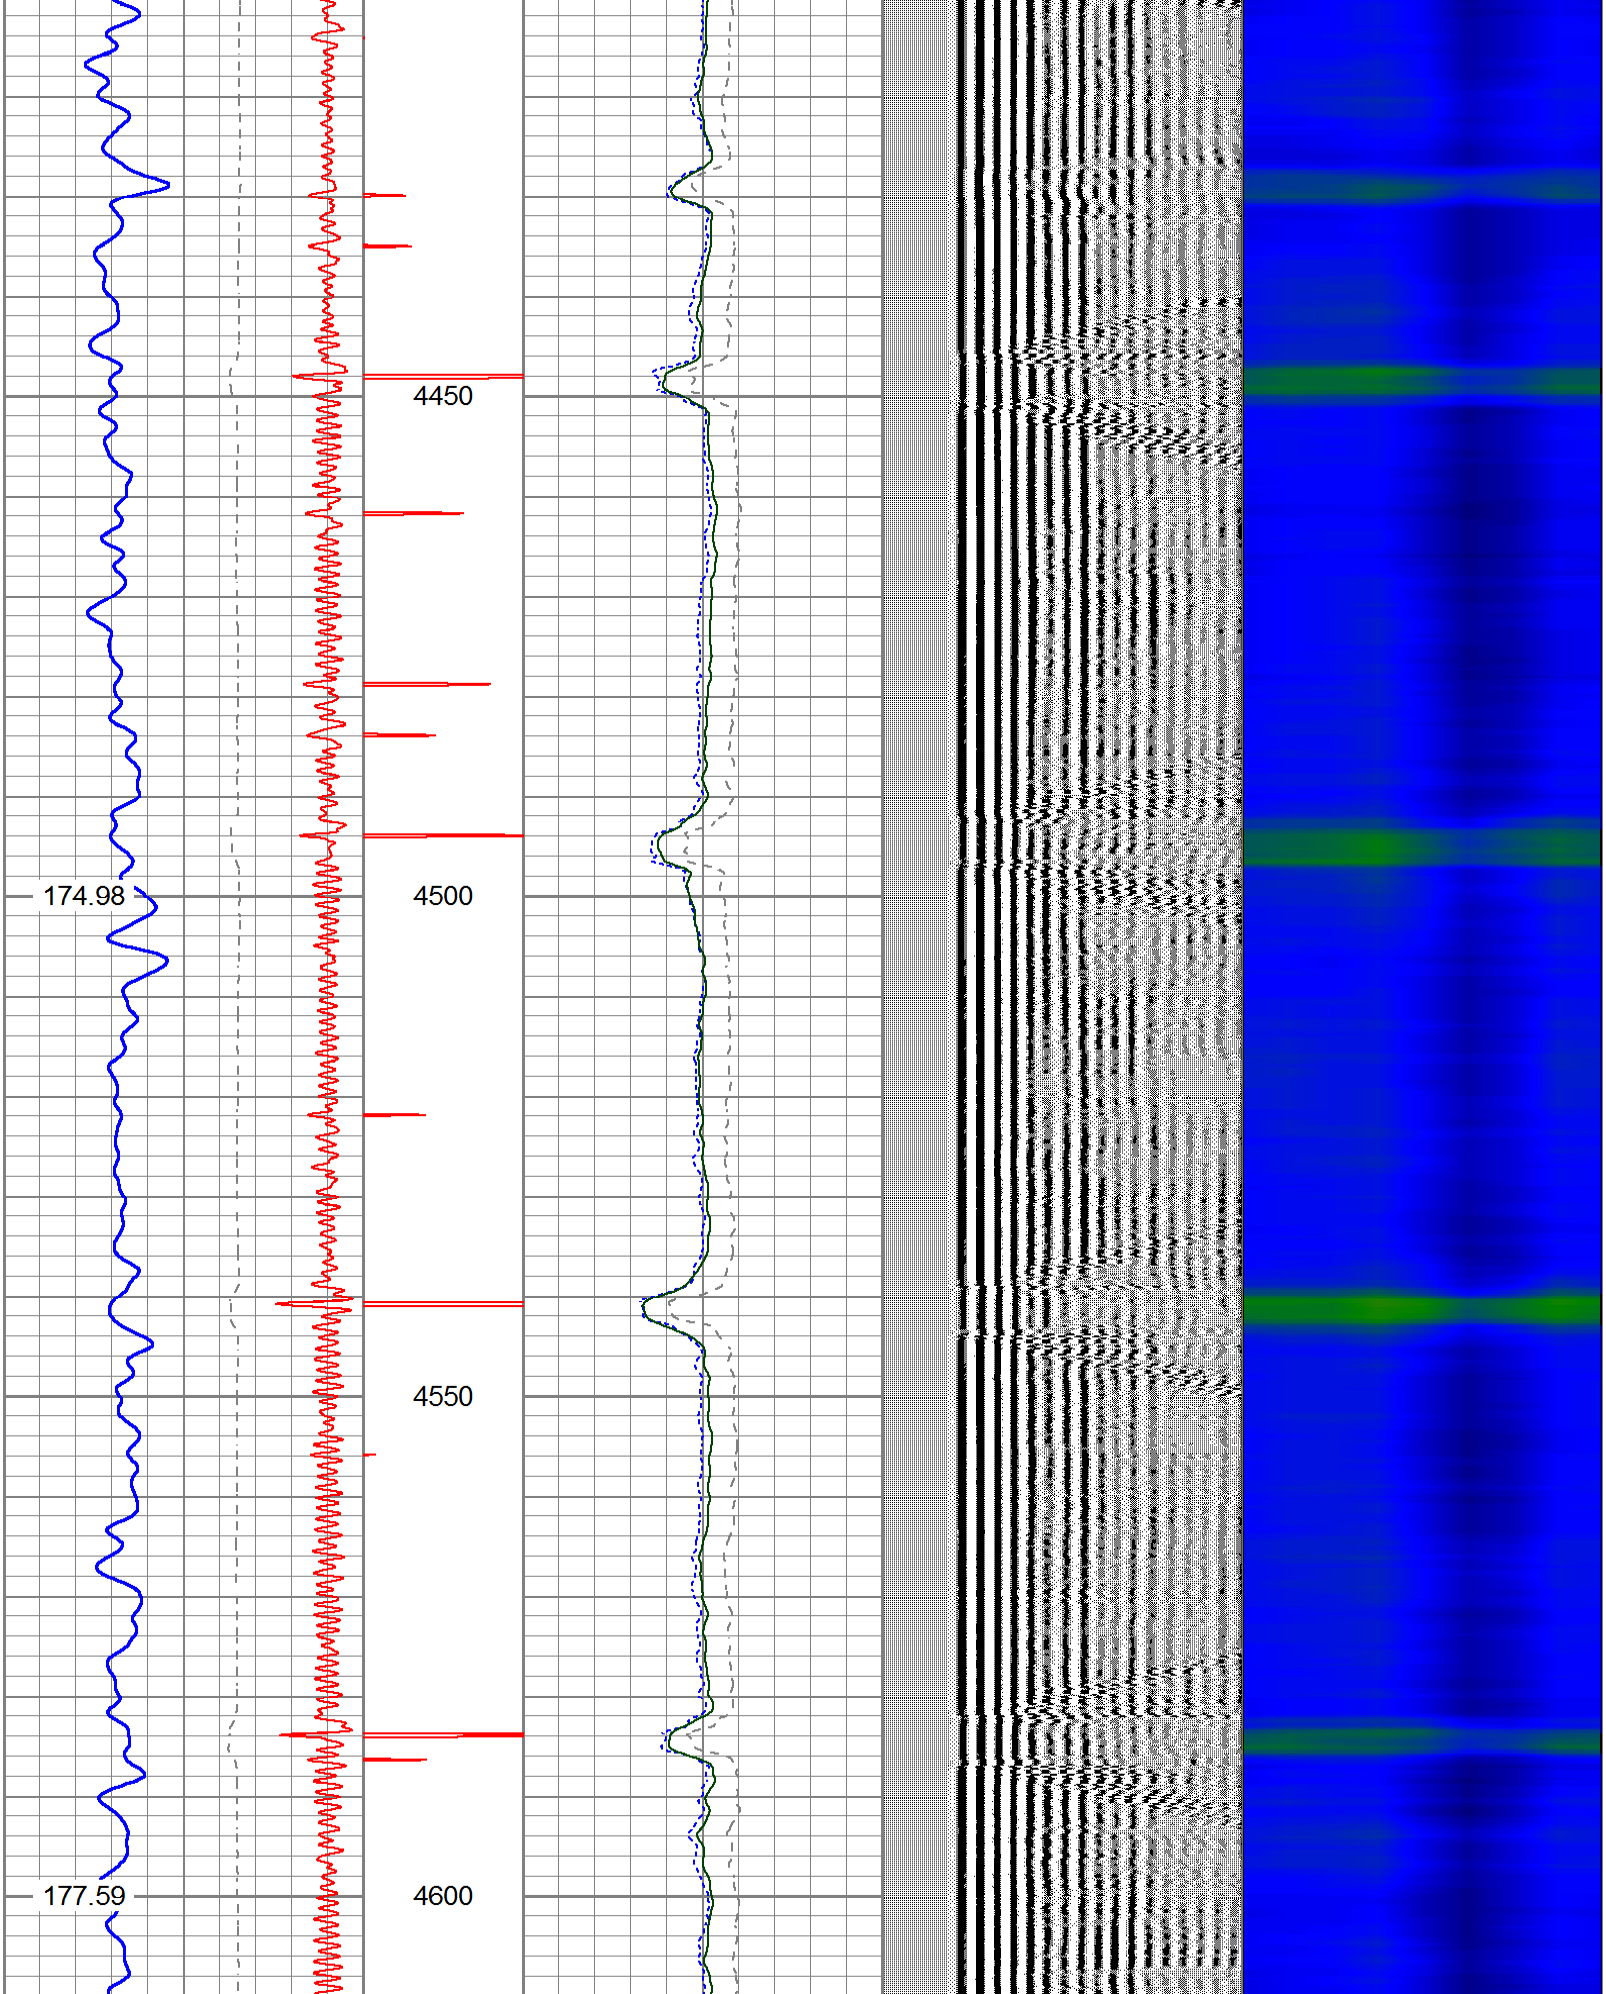

174.98
177.59
4450
4500
4550
4600

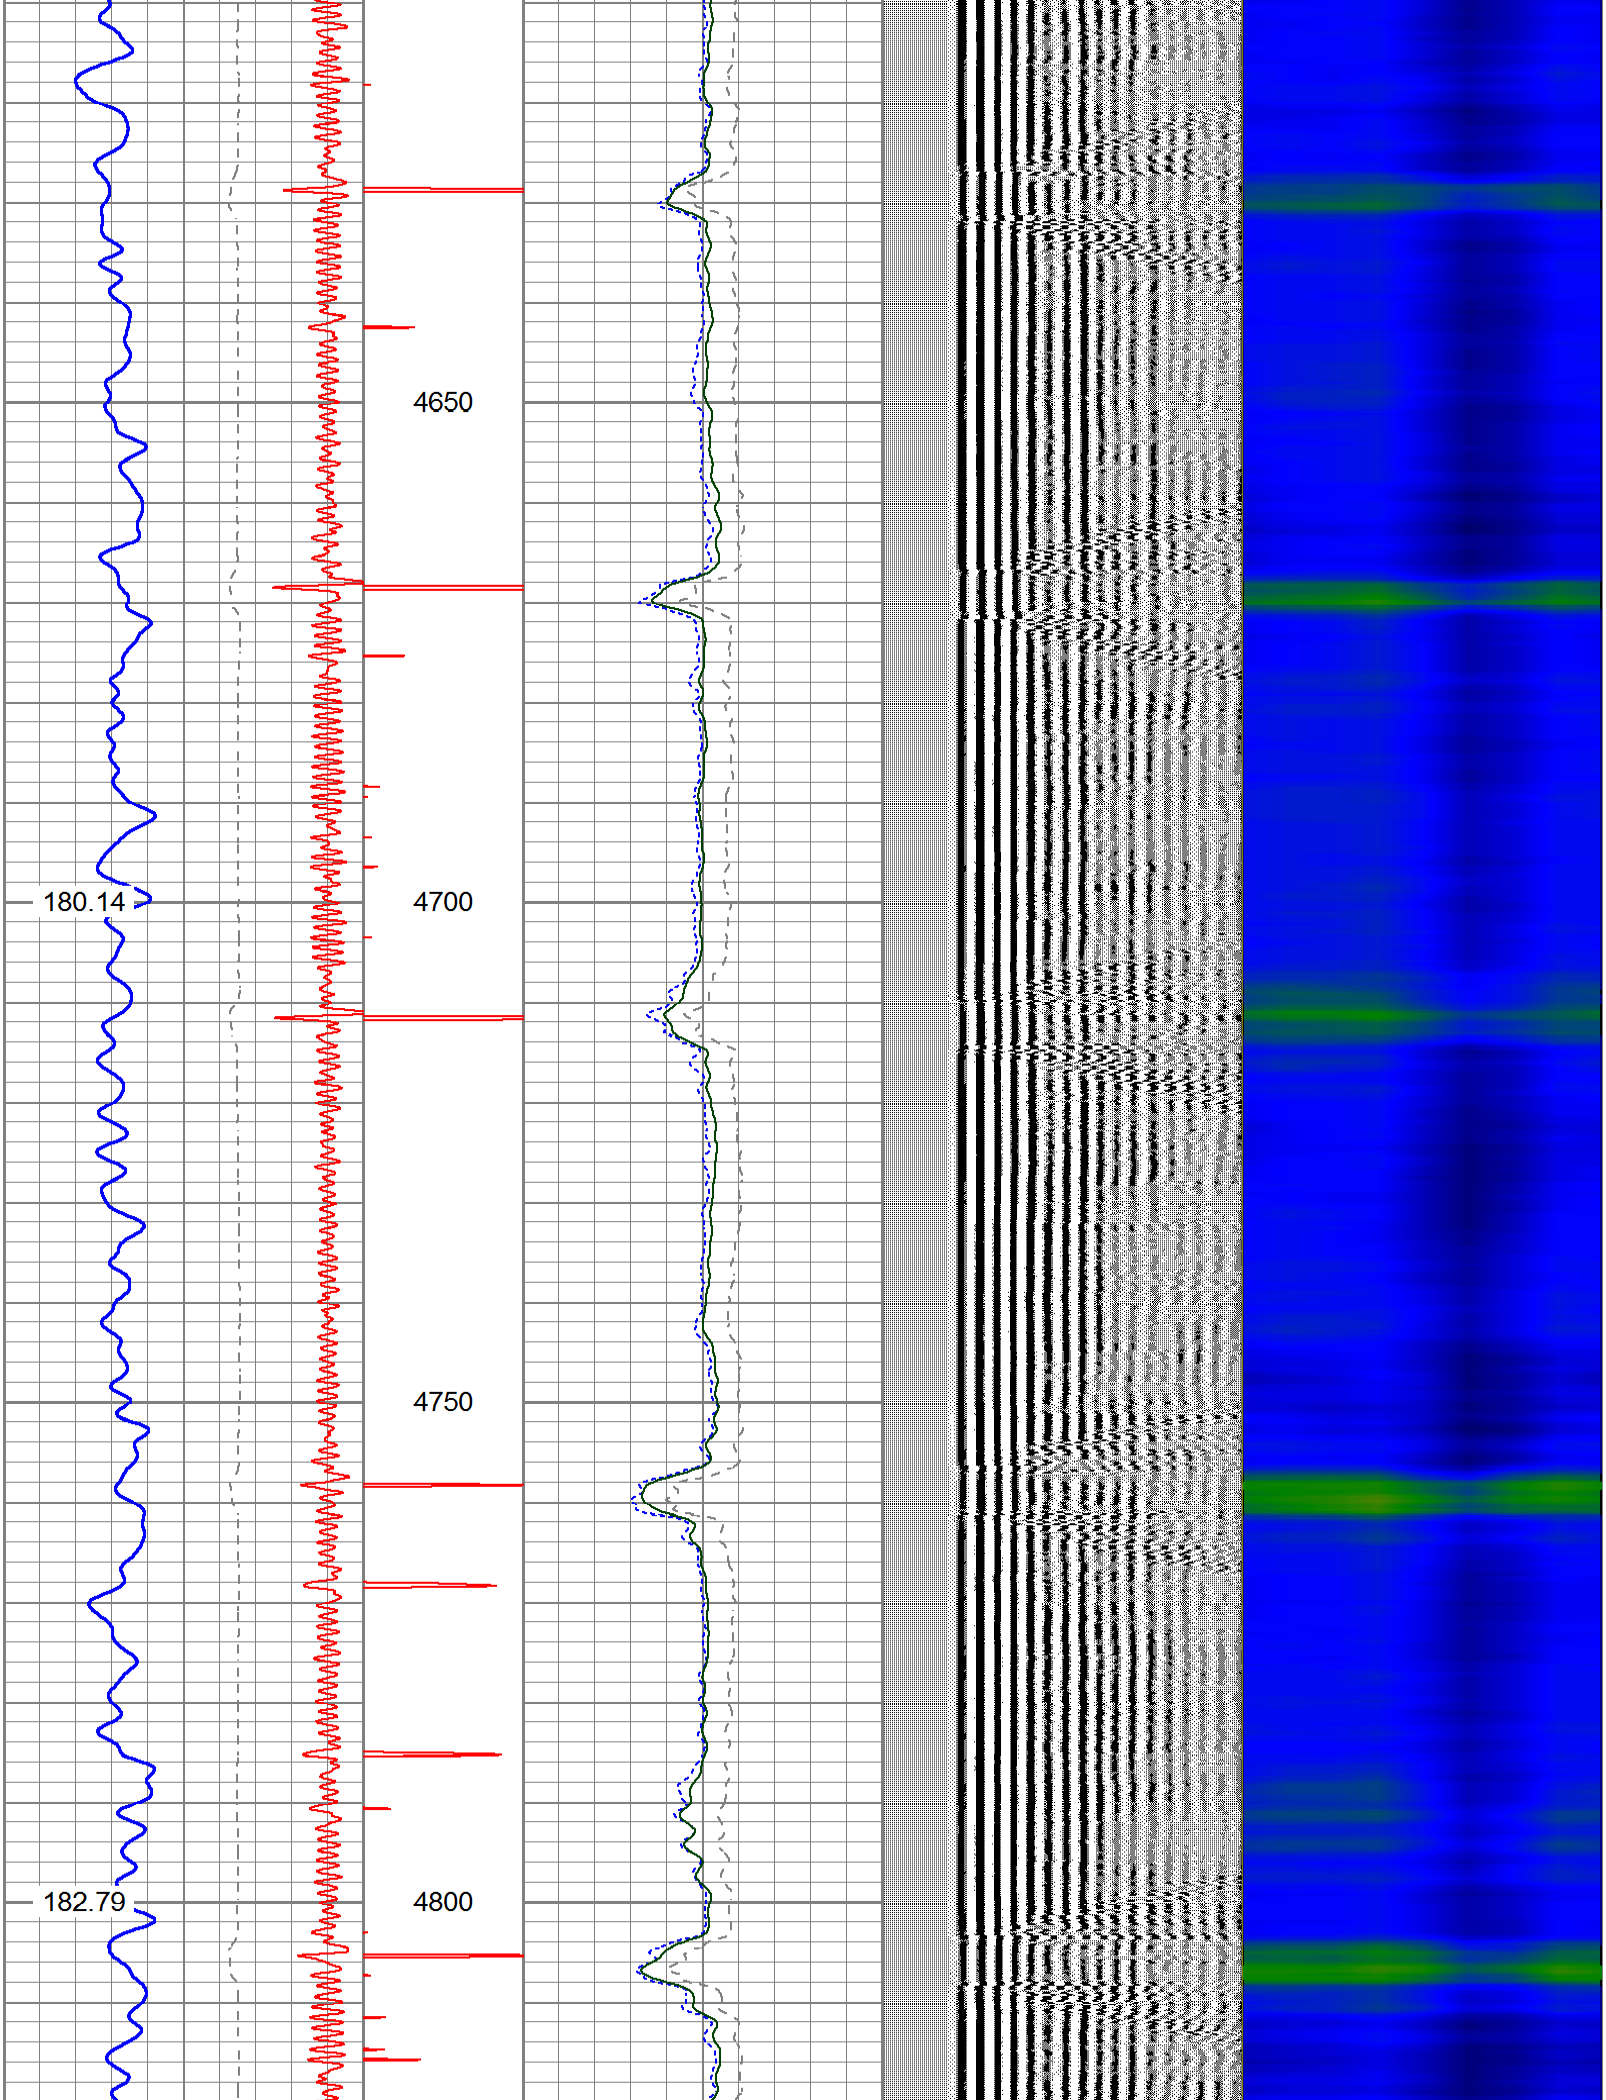
4650
180.14
4700
4750
182.79
4800

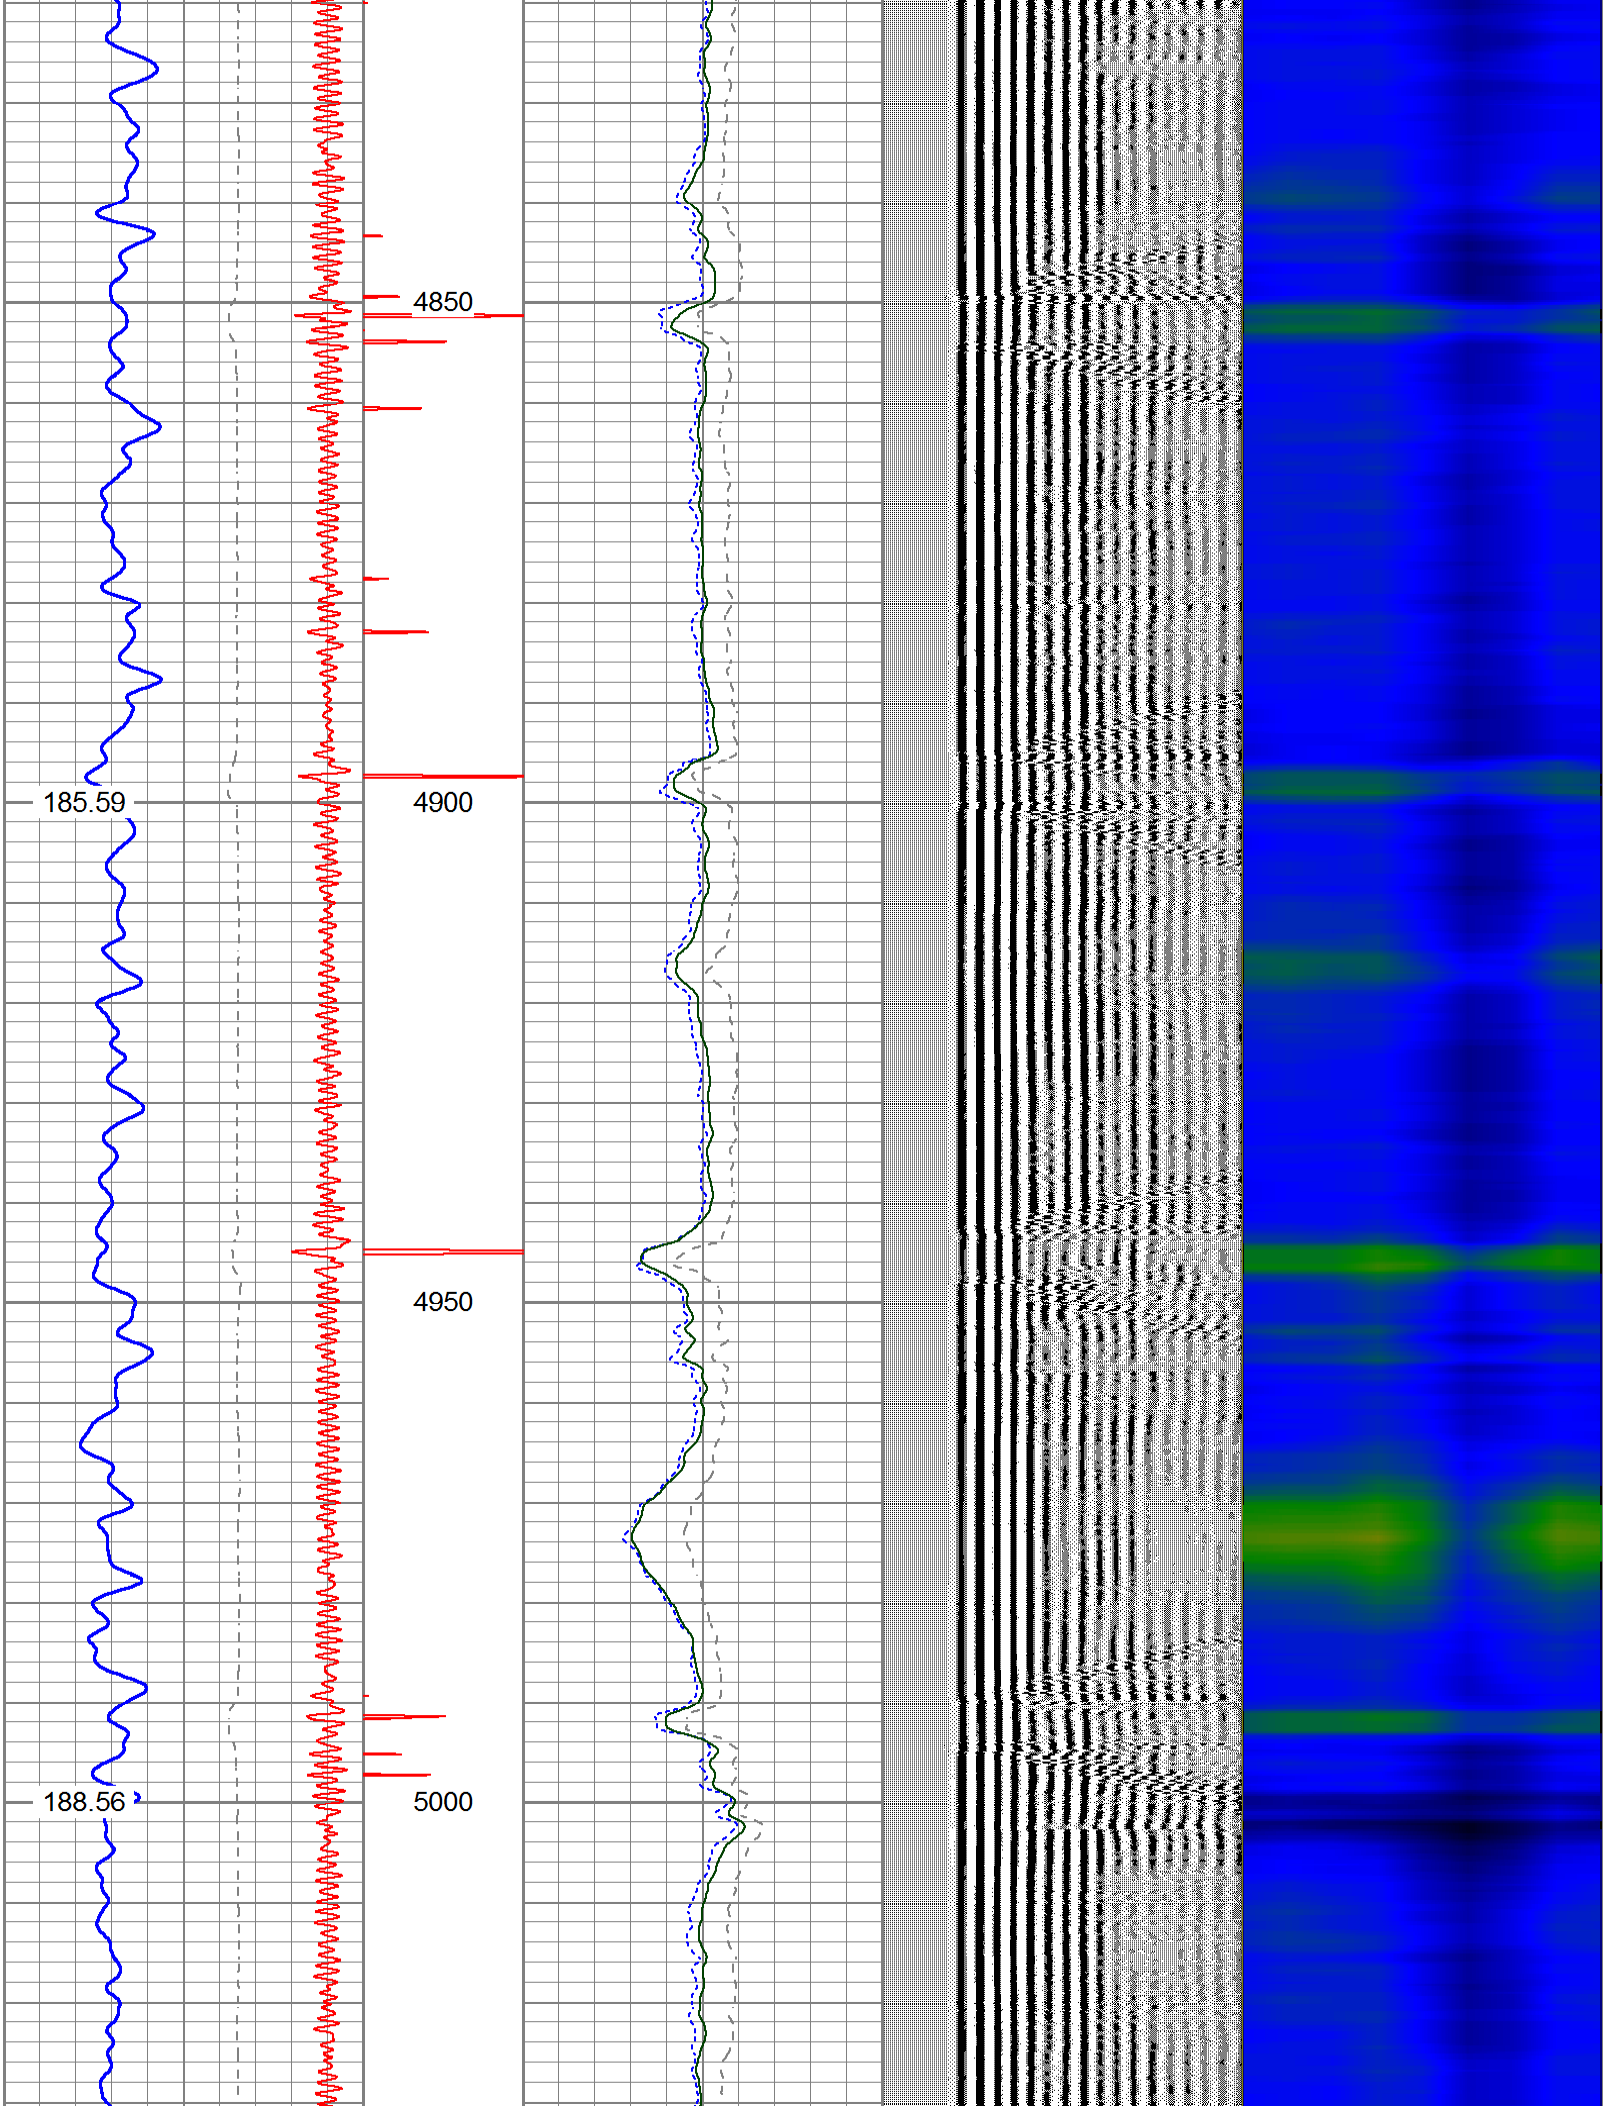
4850
185.59
4900
4950
188.56
5000

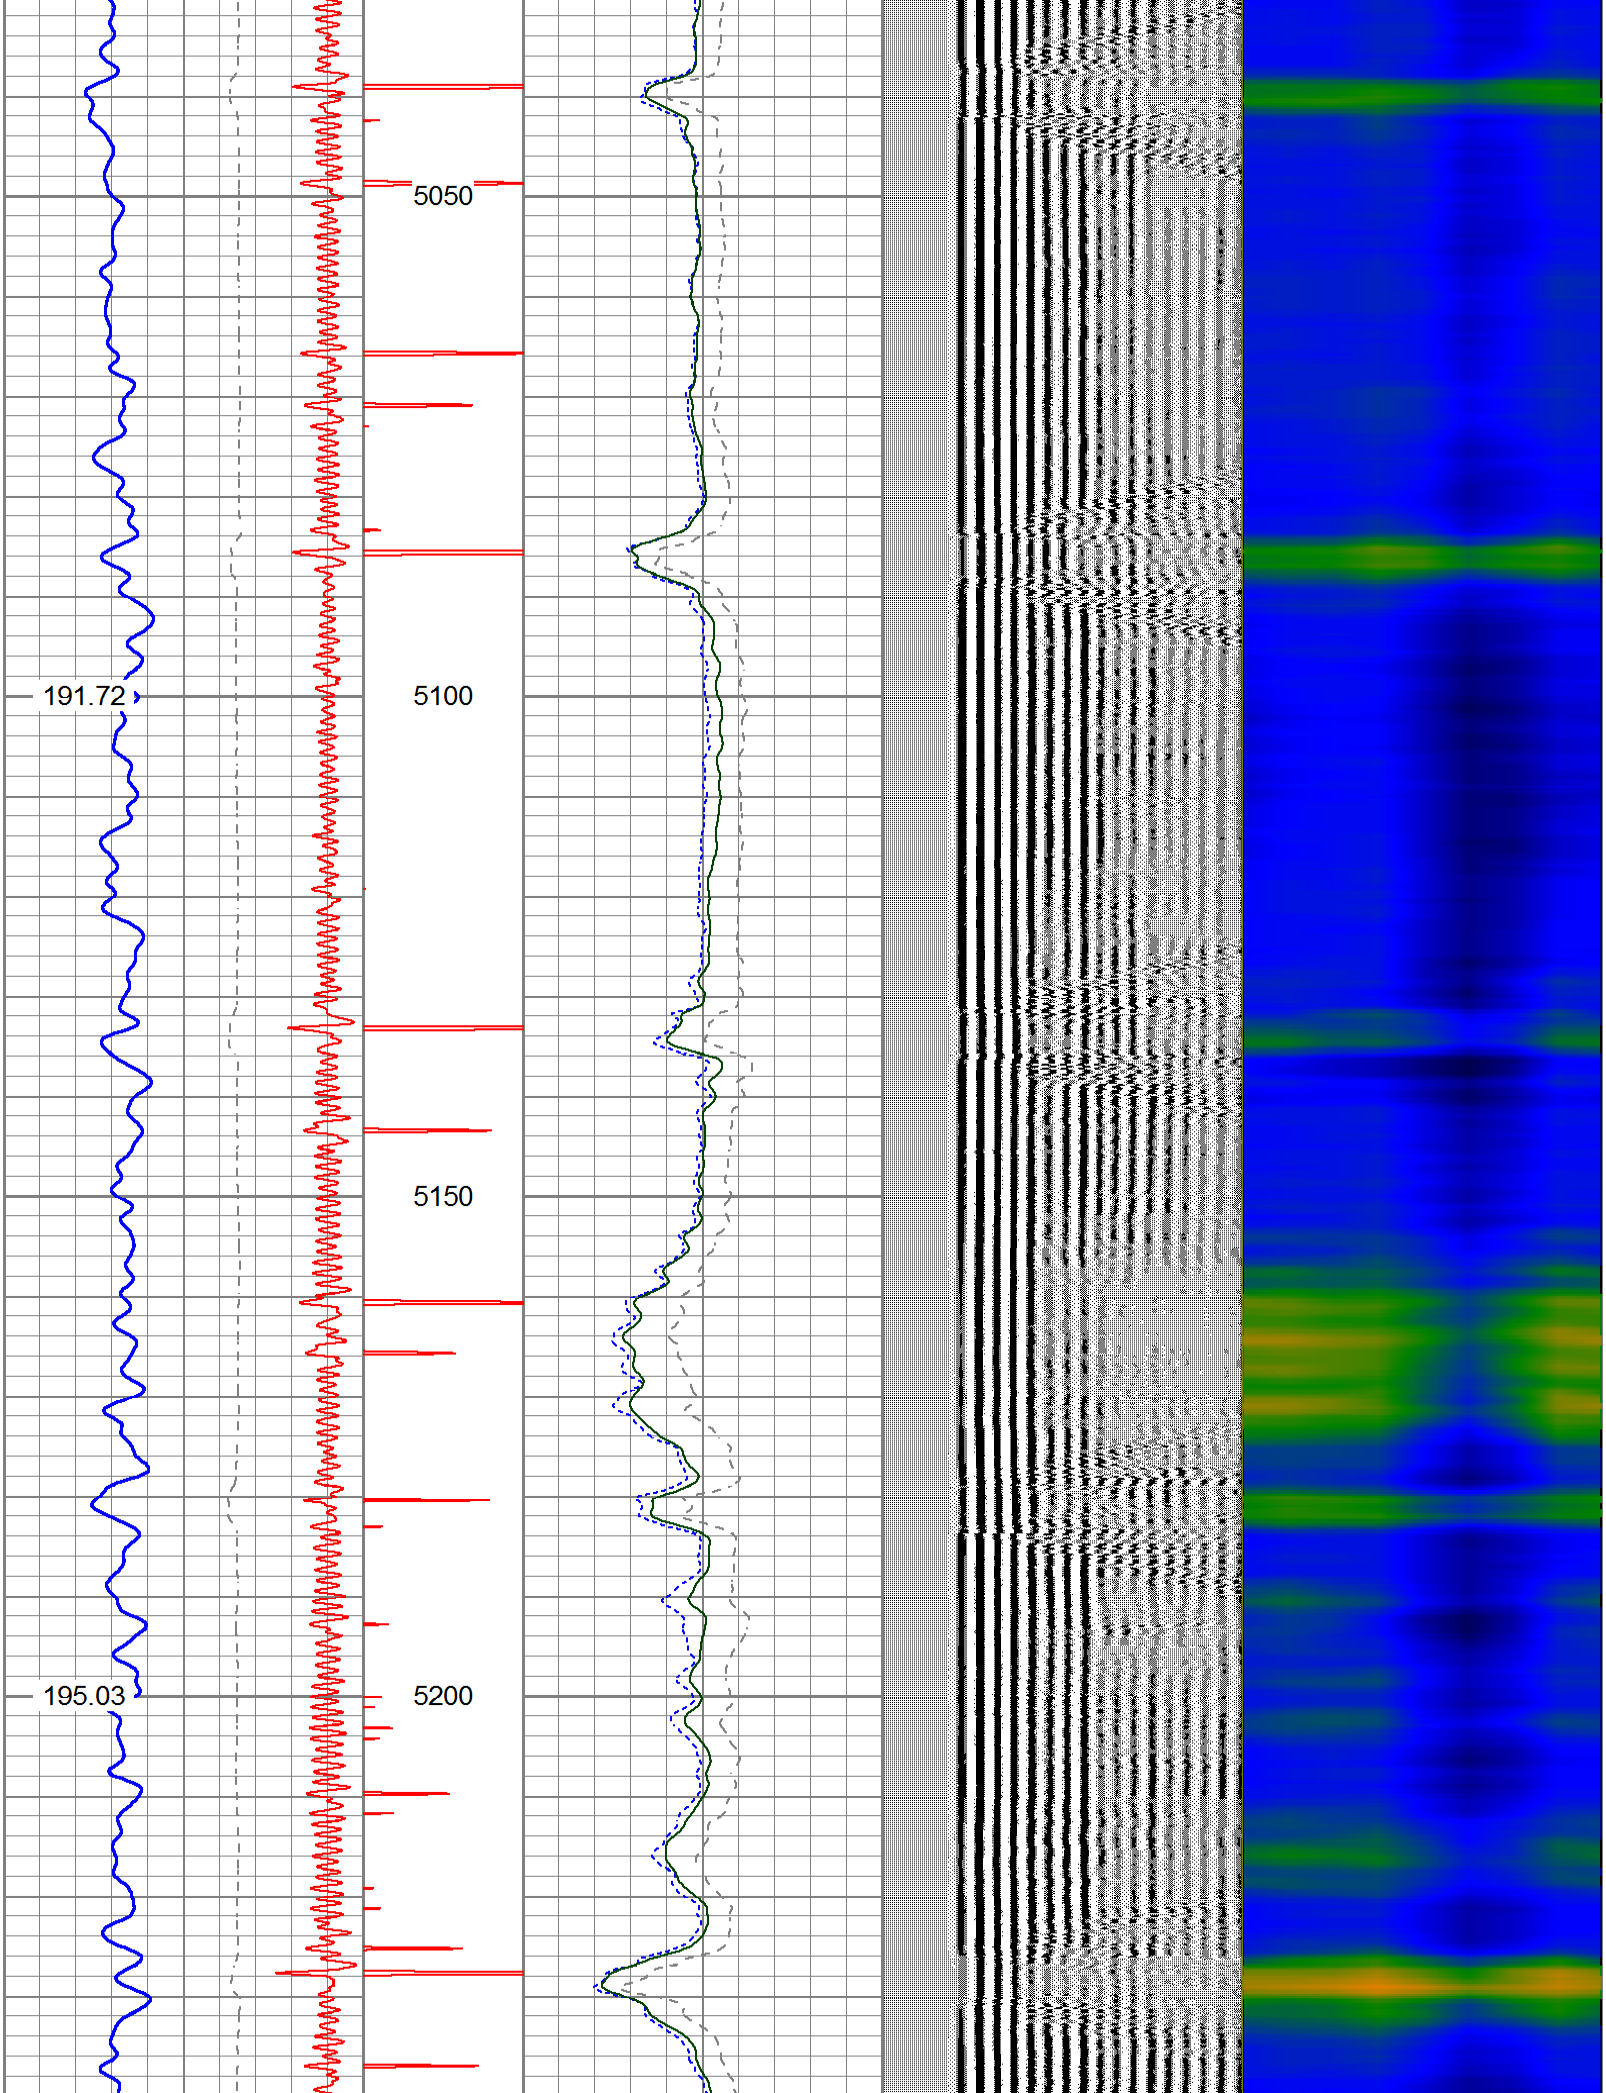
5050
191.72
5100
5150
195.03
5200

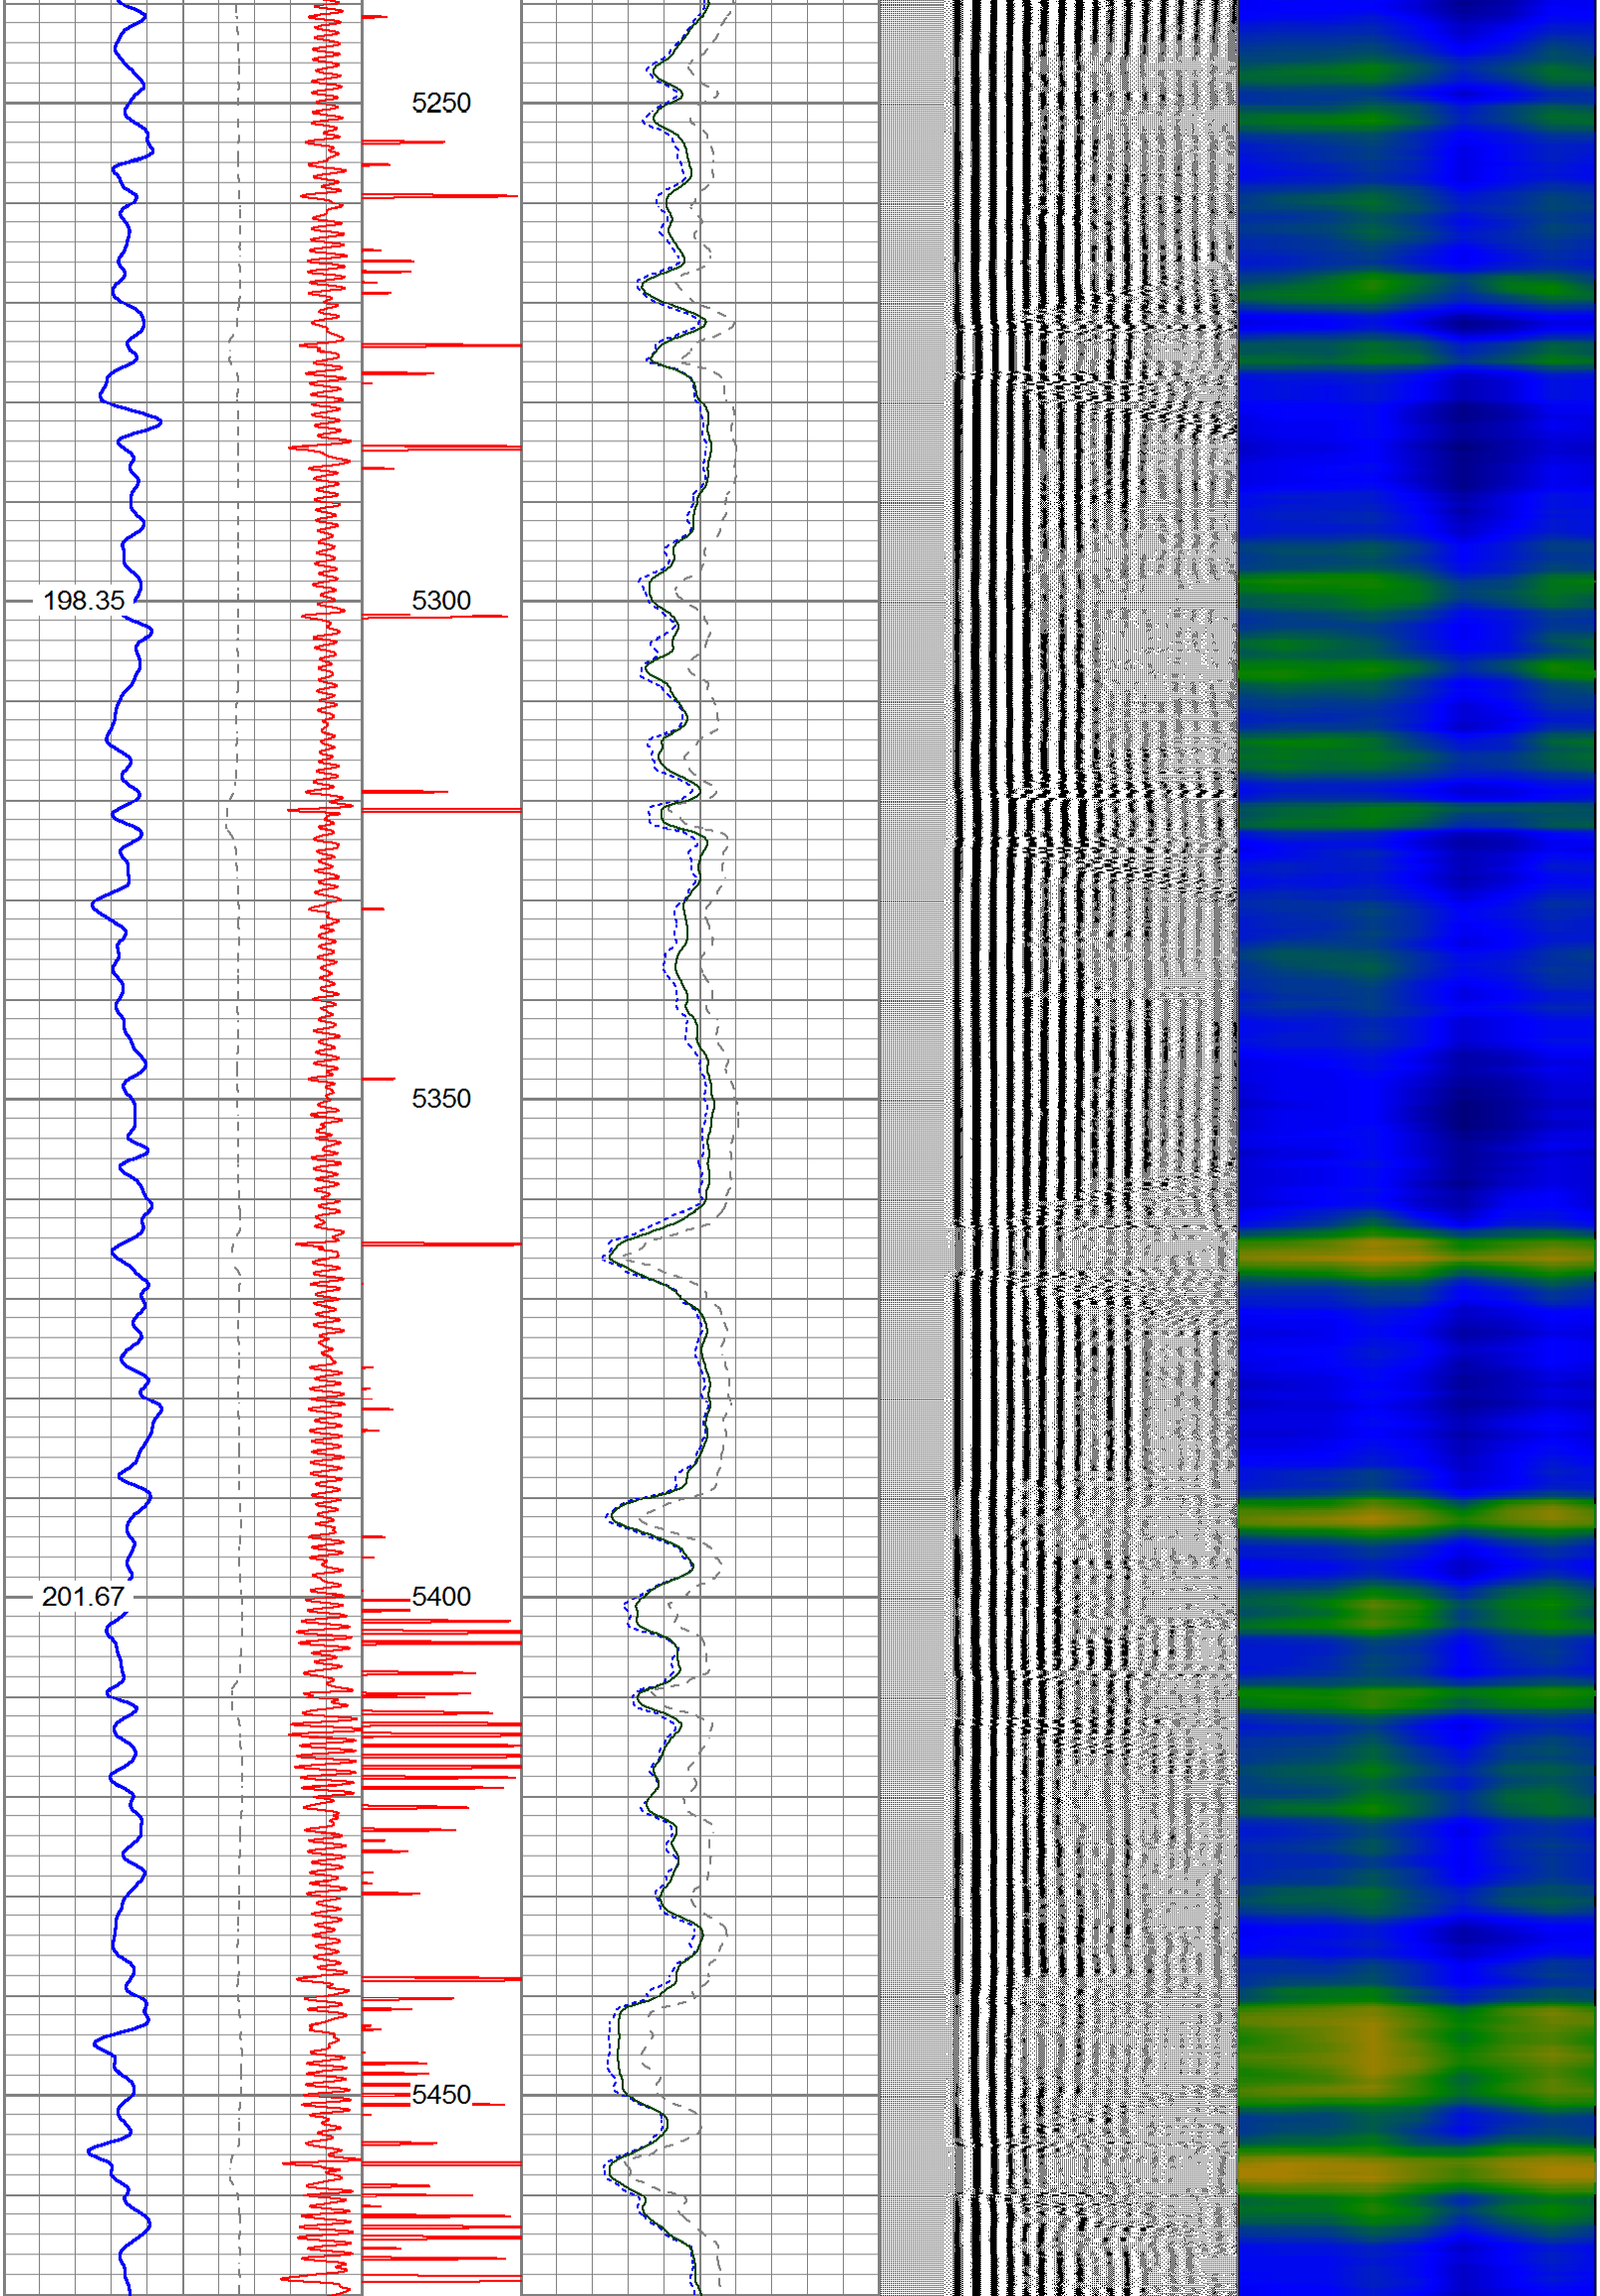
5250
5300
5350
5400
5450
198.35
201.67

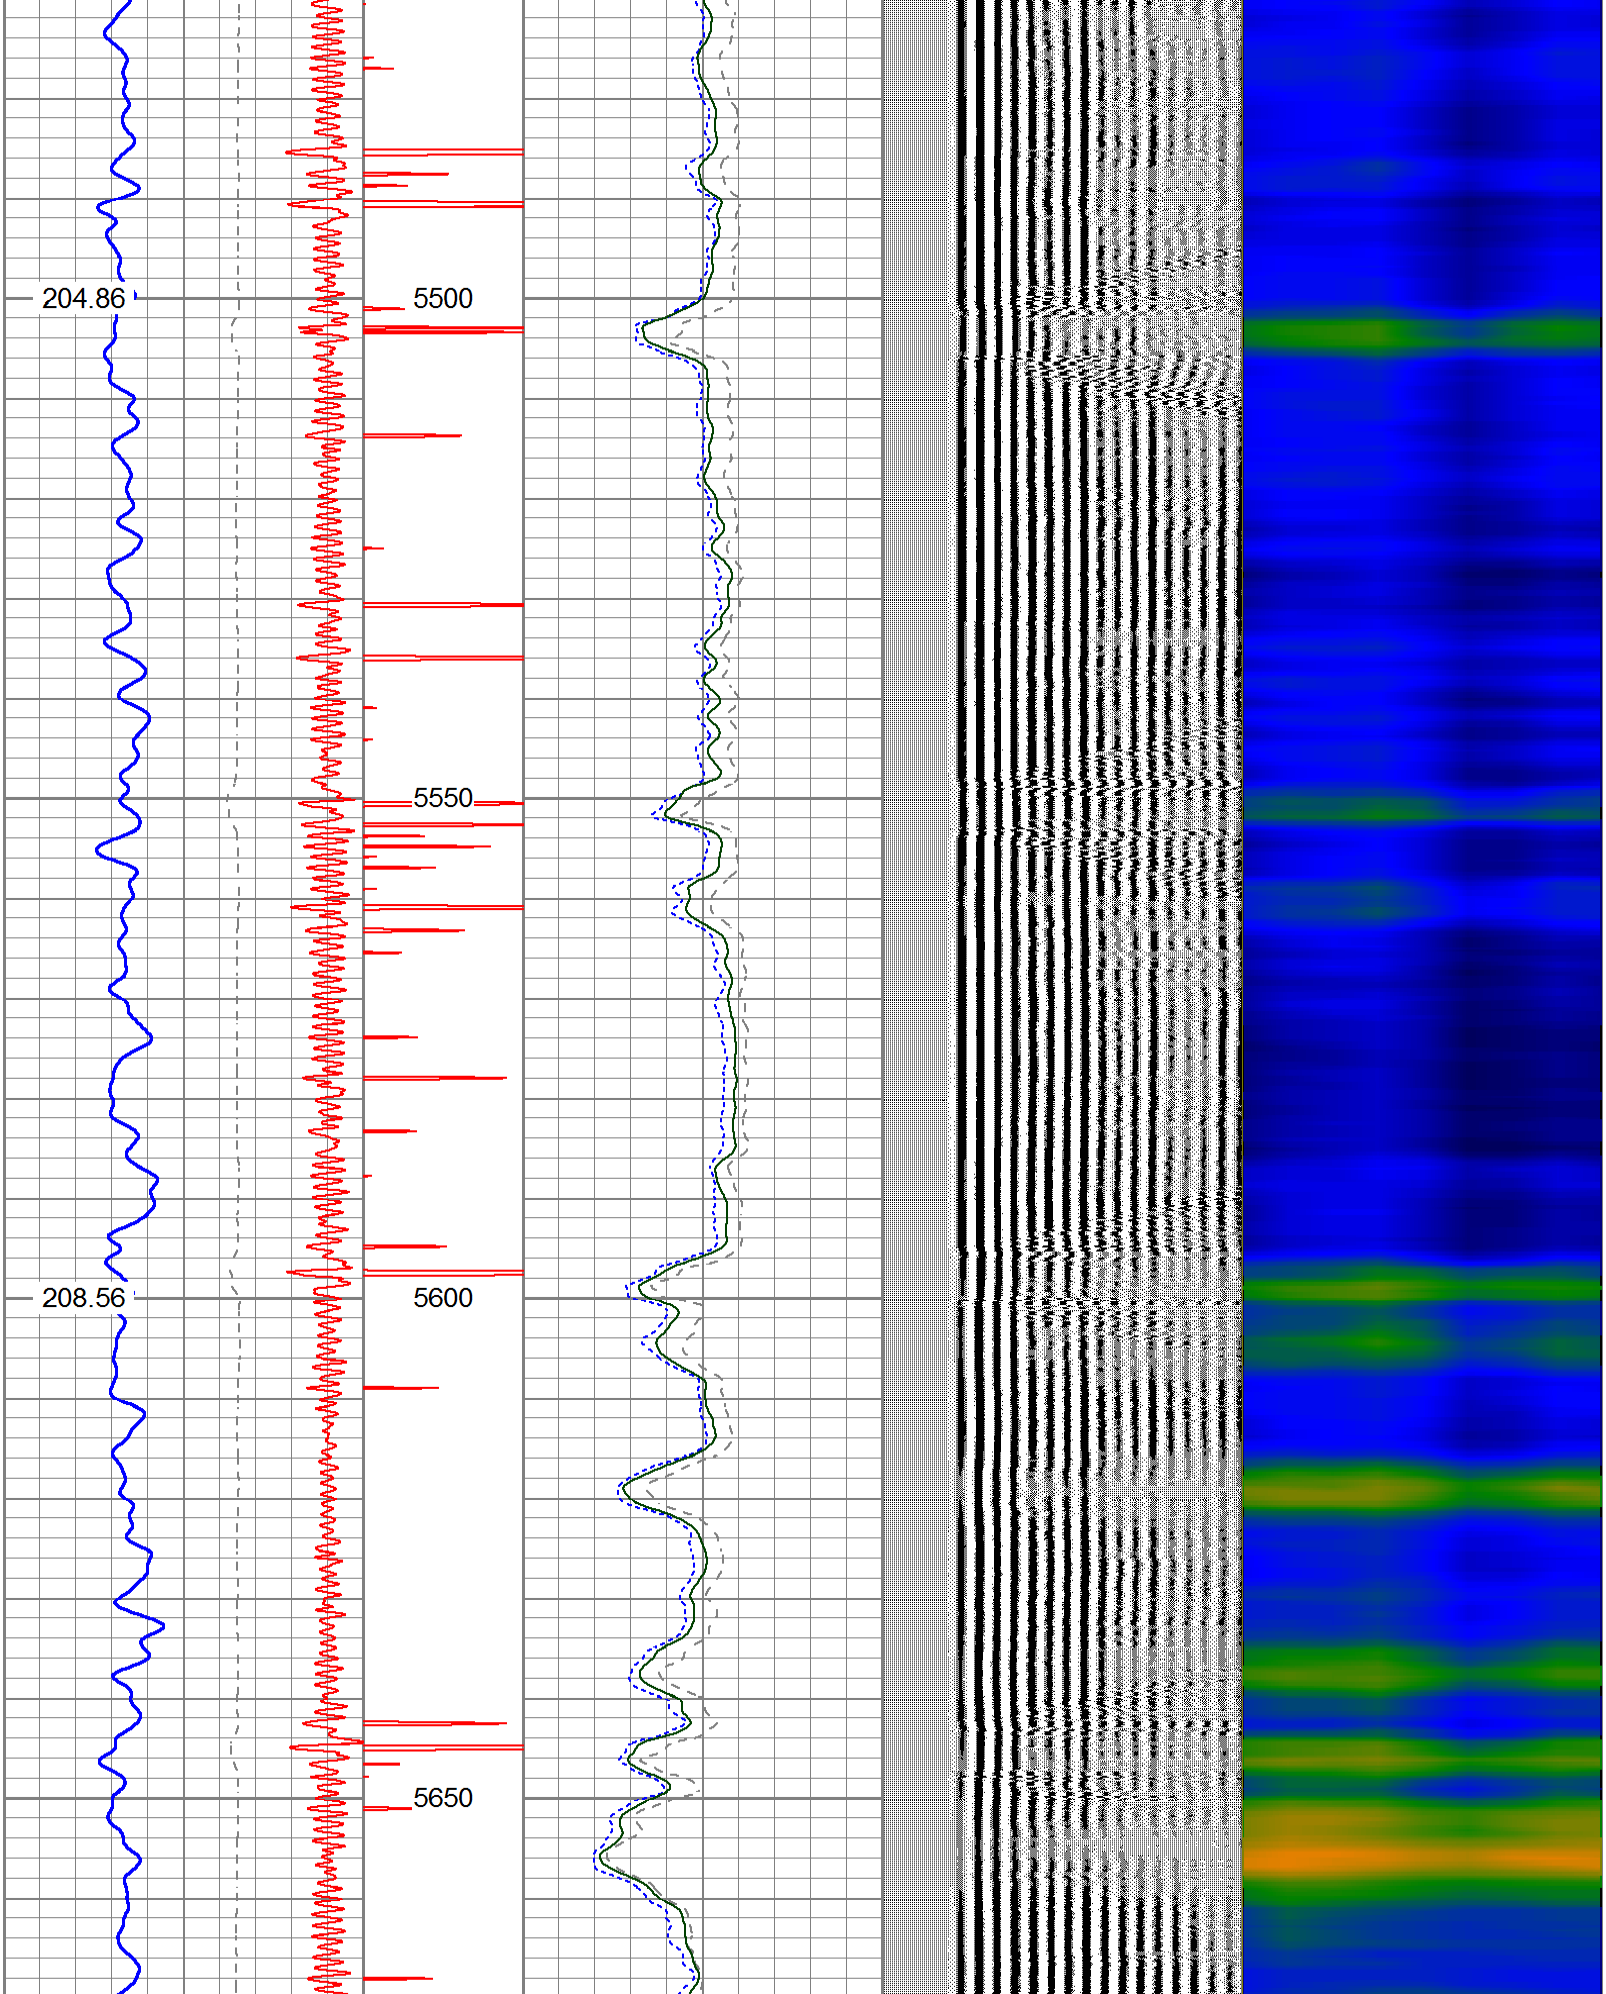
204.86
5500
5550
208.56
5600
5650

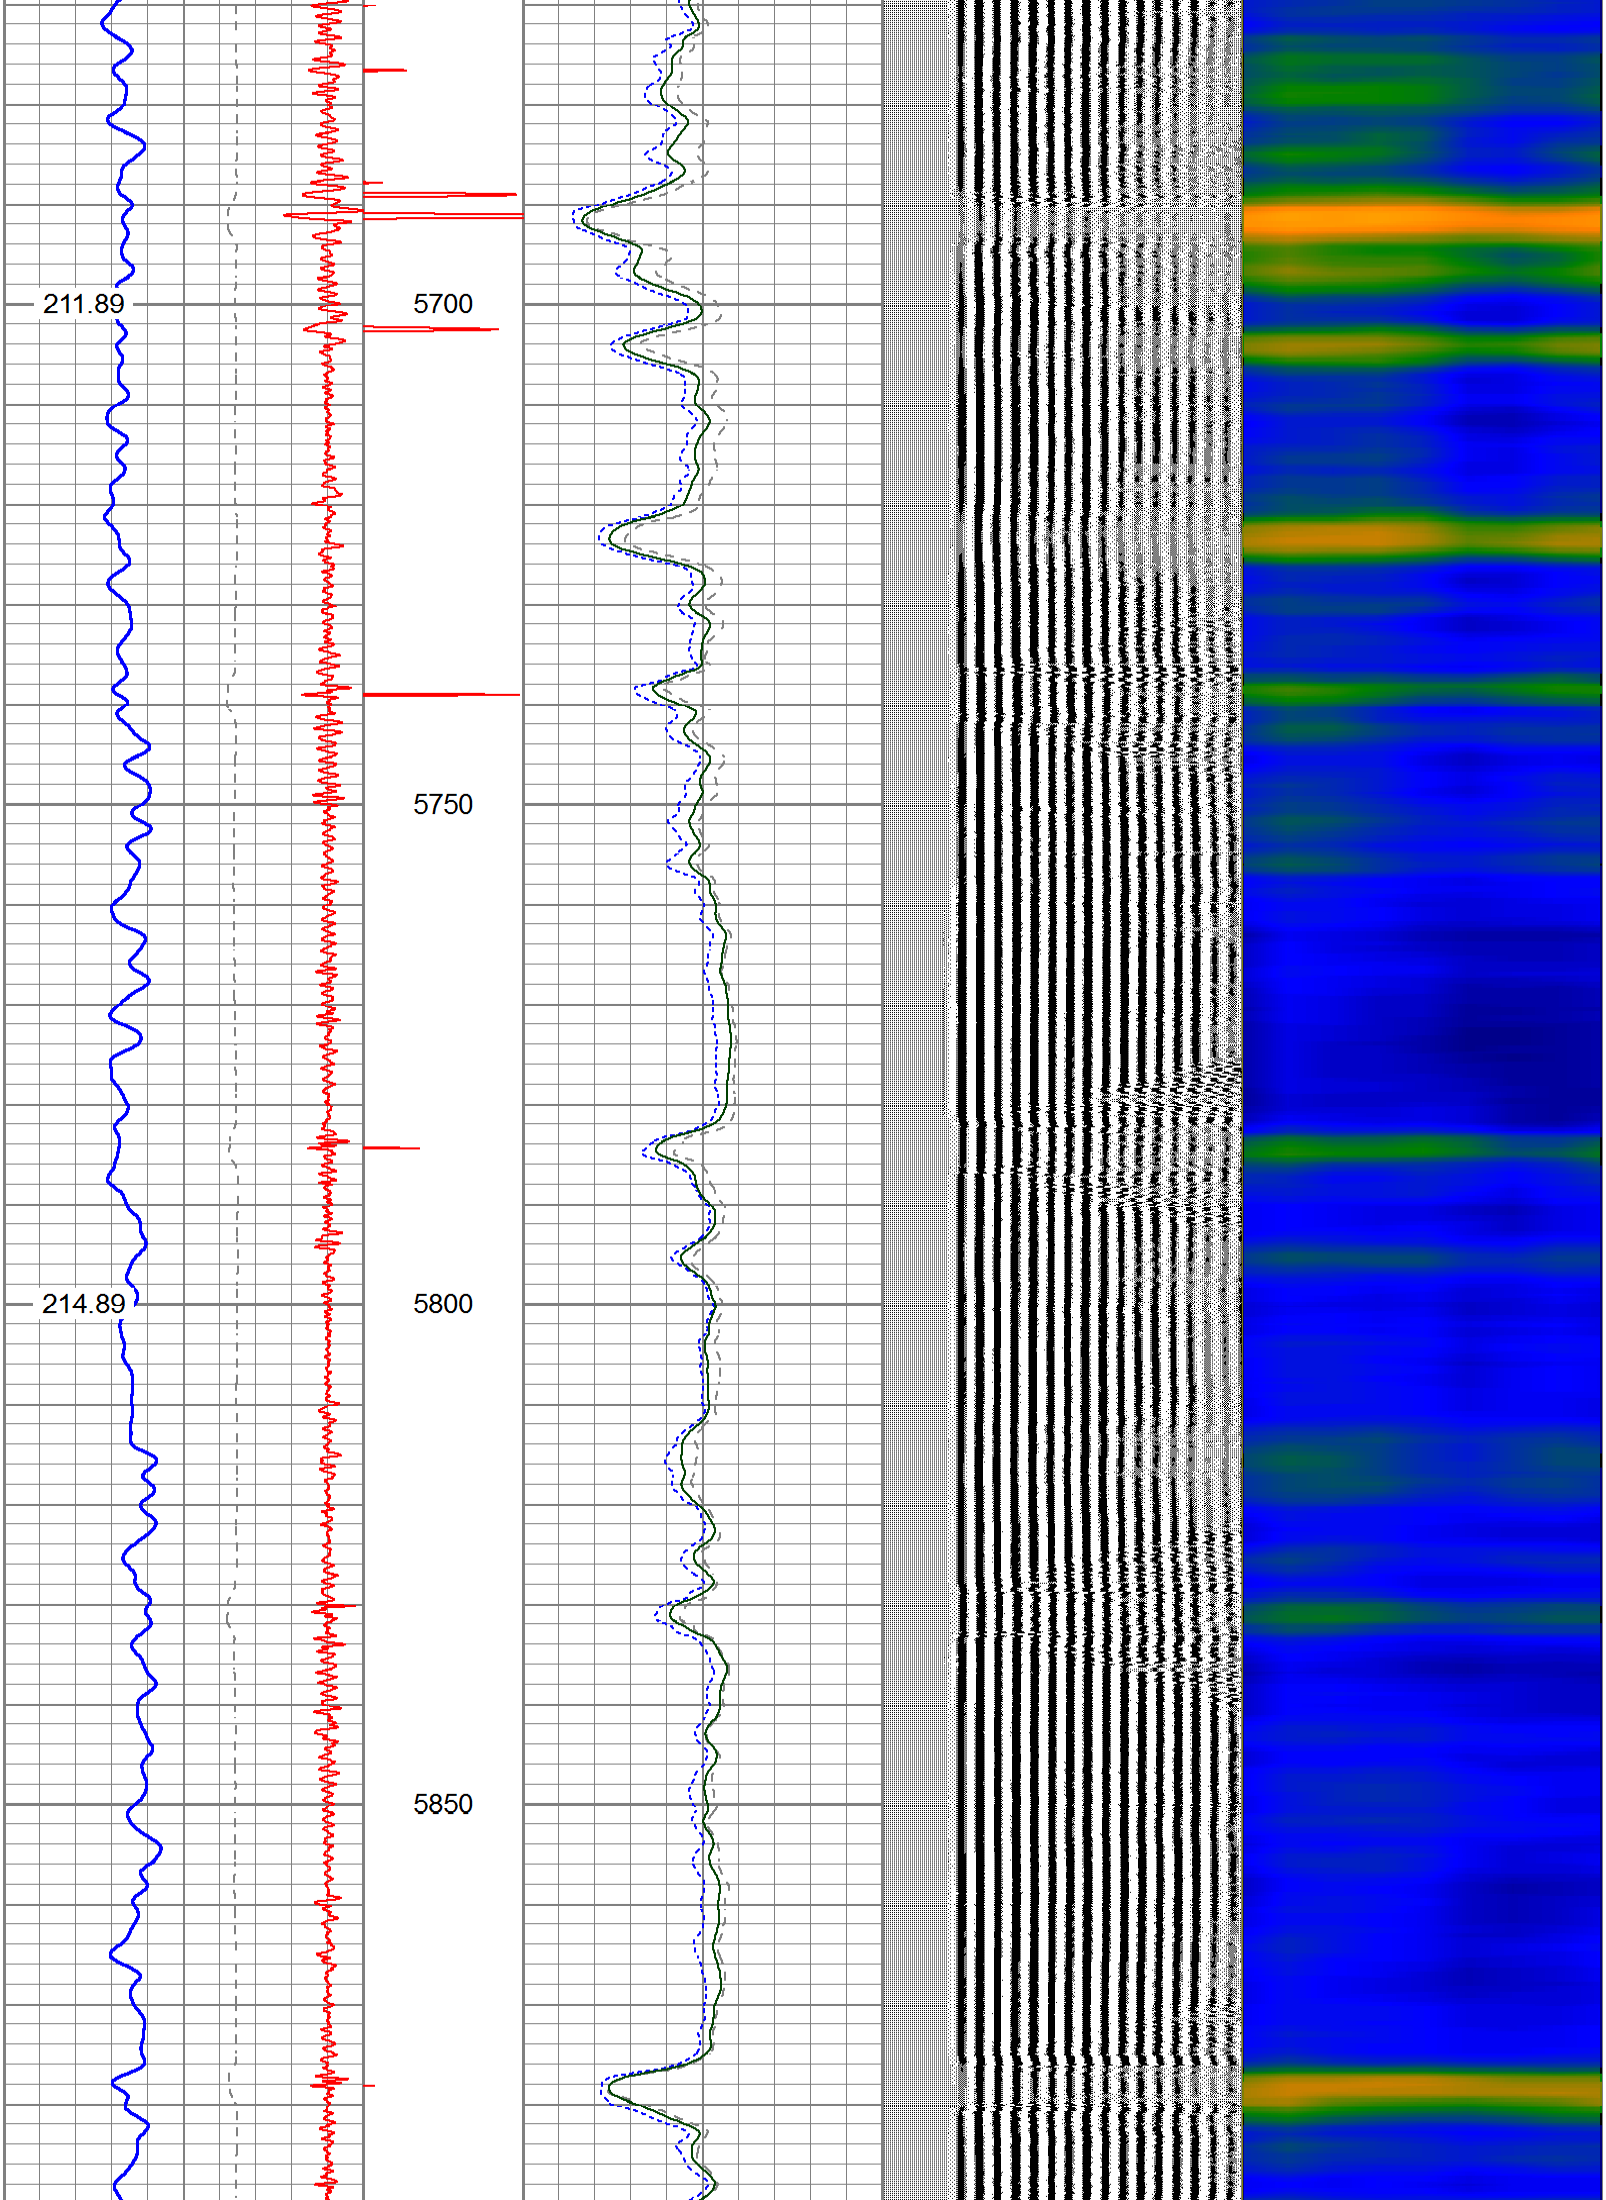
211.89
5700
5750
214.89
5800
5850

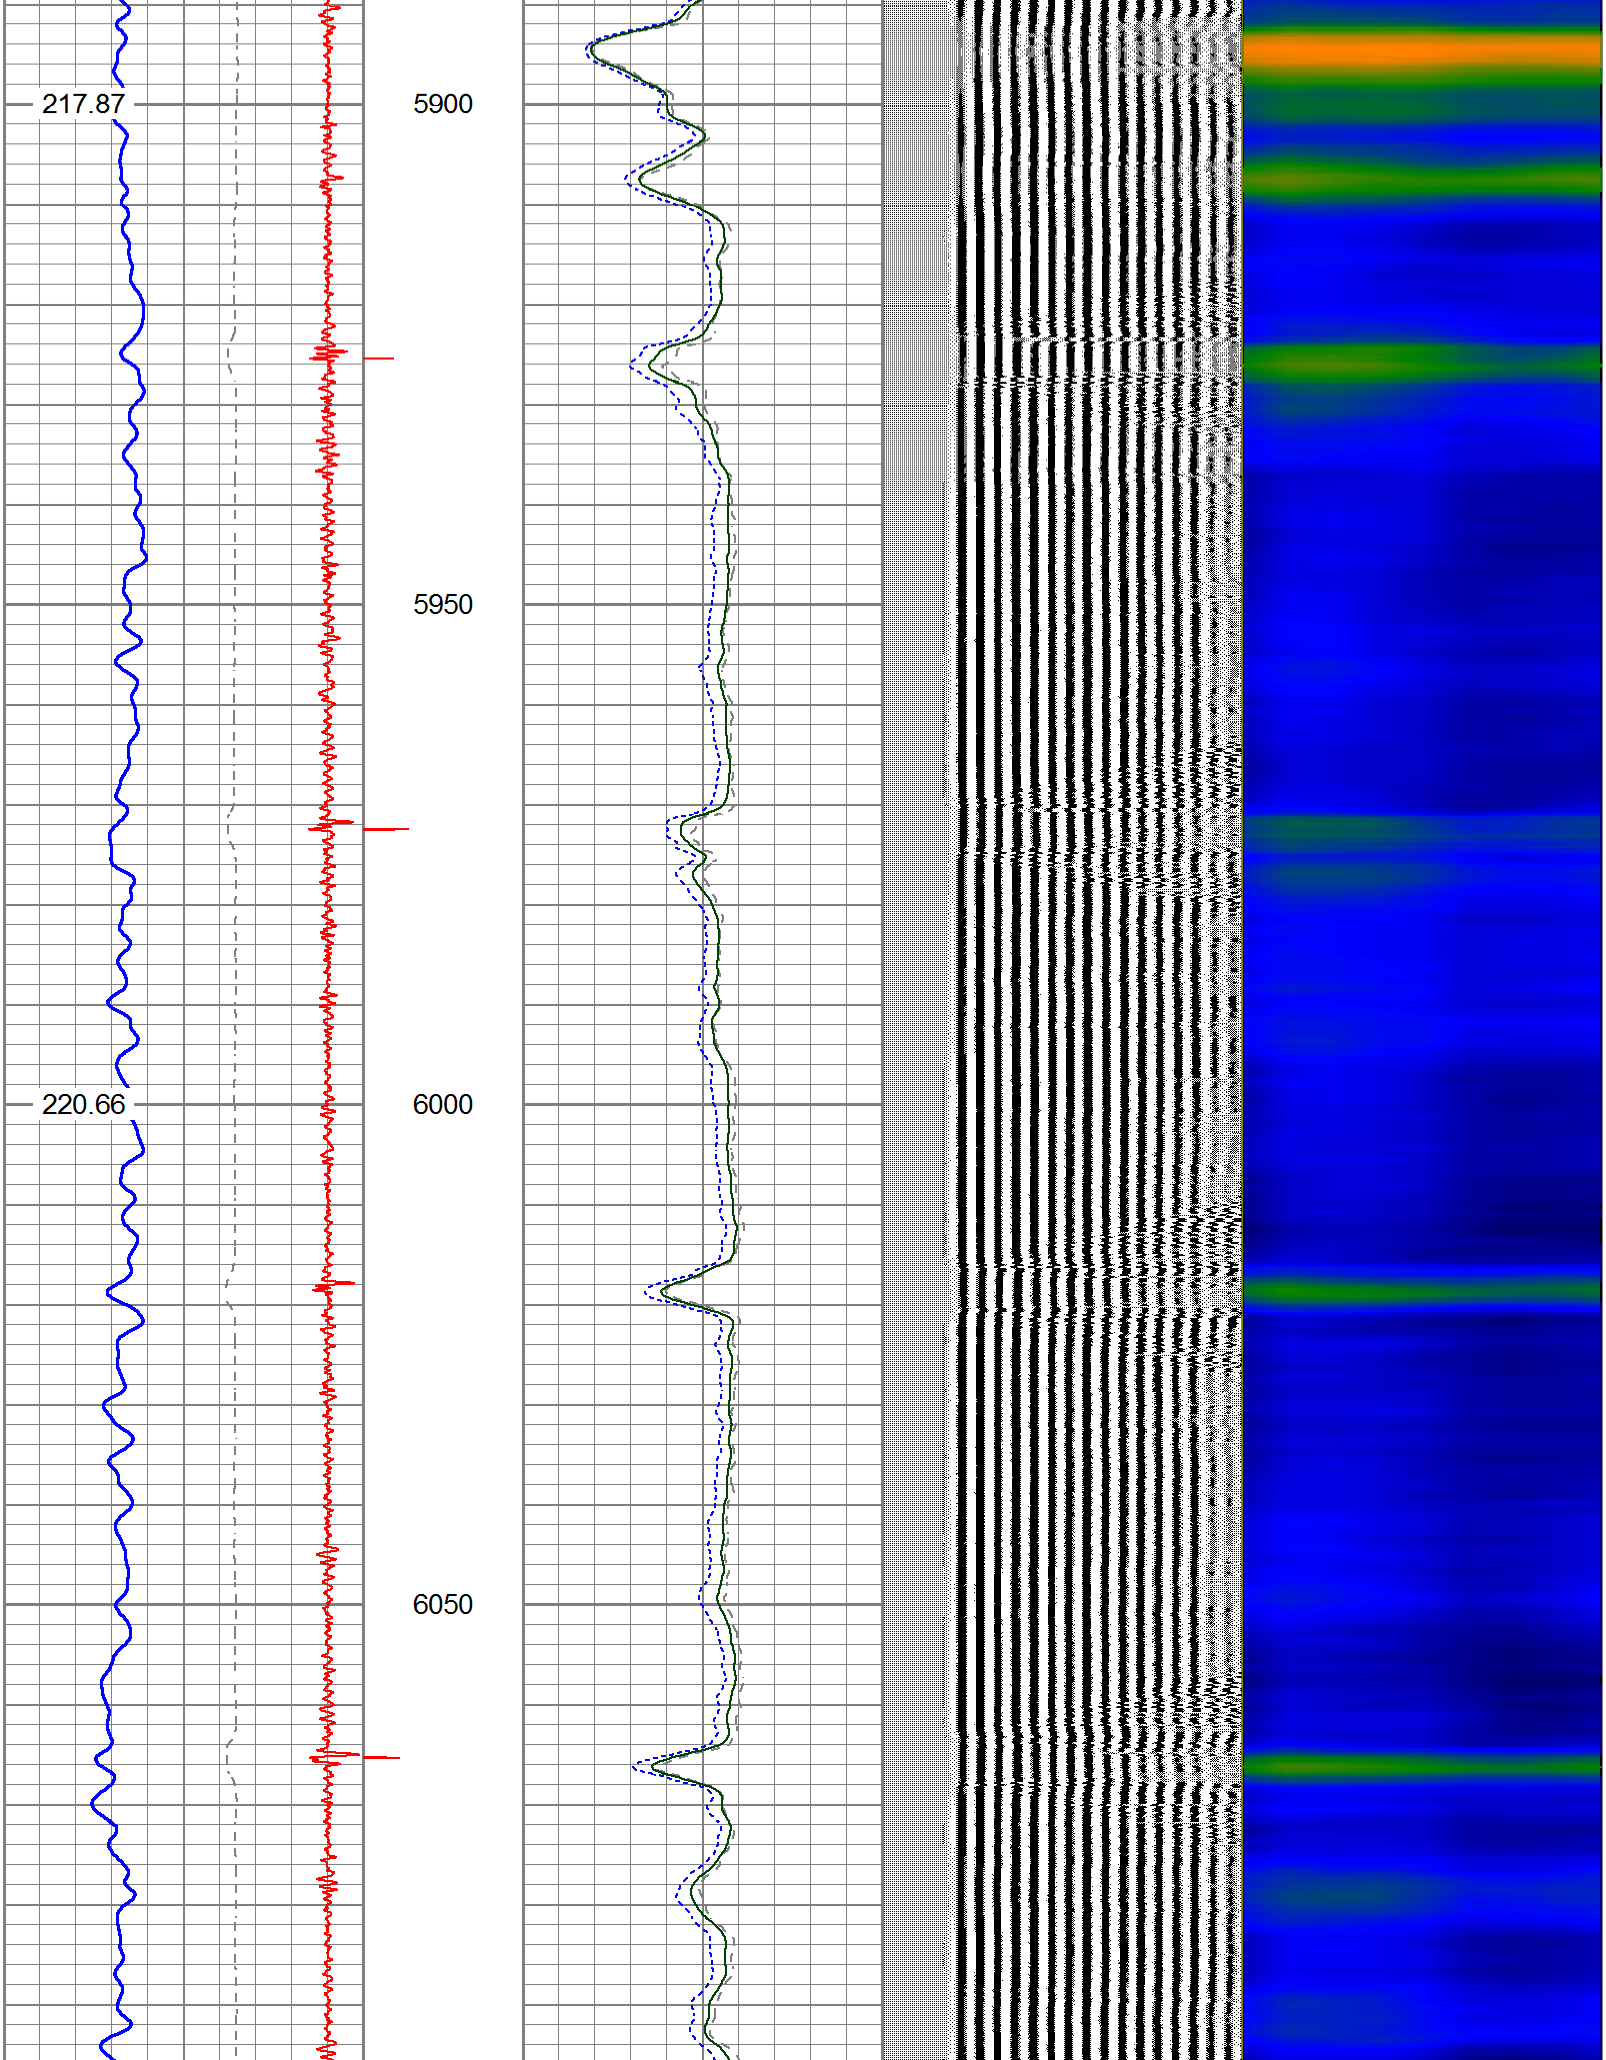
217.87
5900
5950
220.66
6000
6050

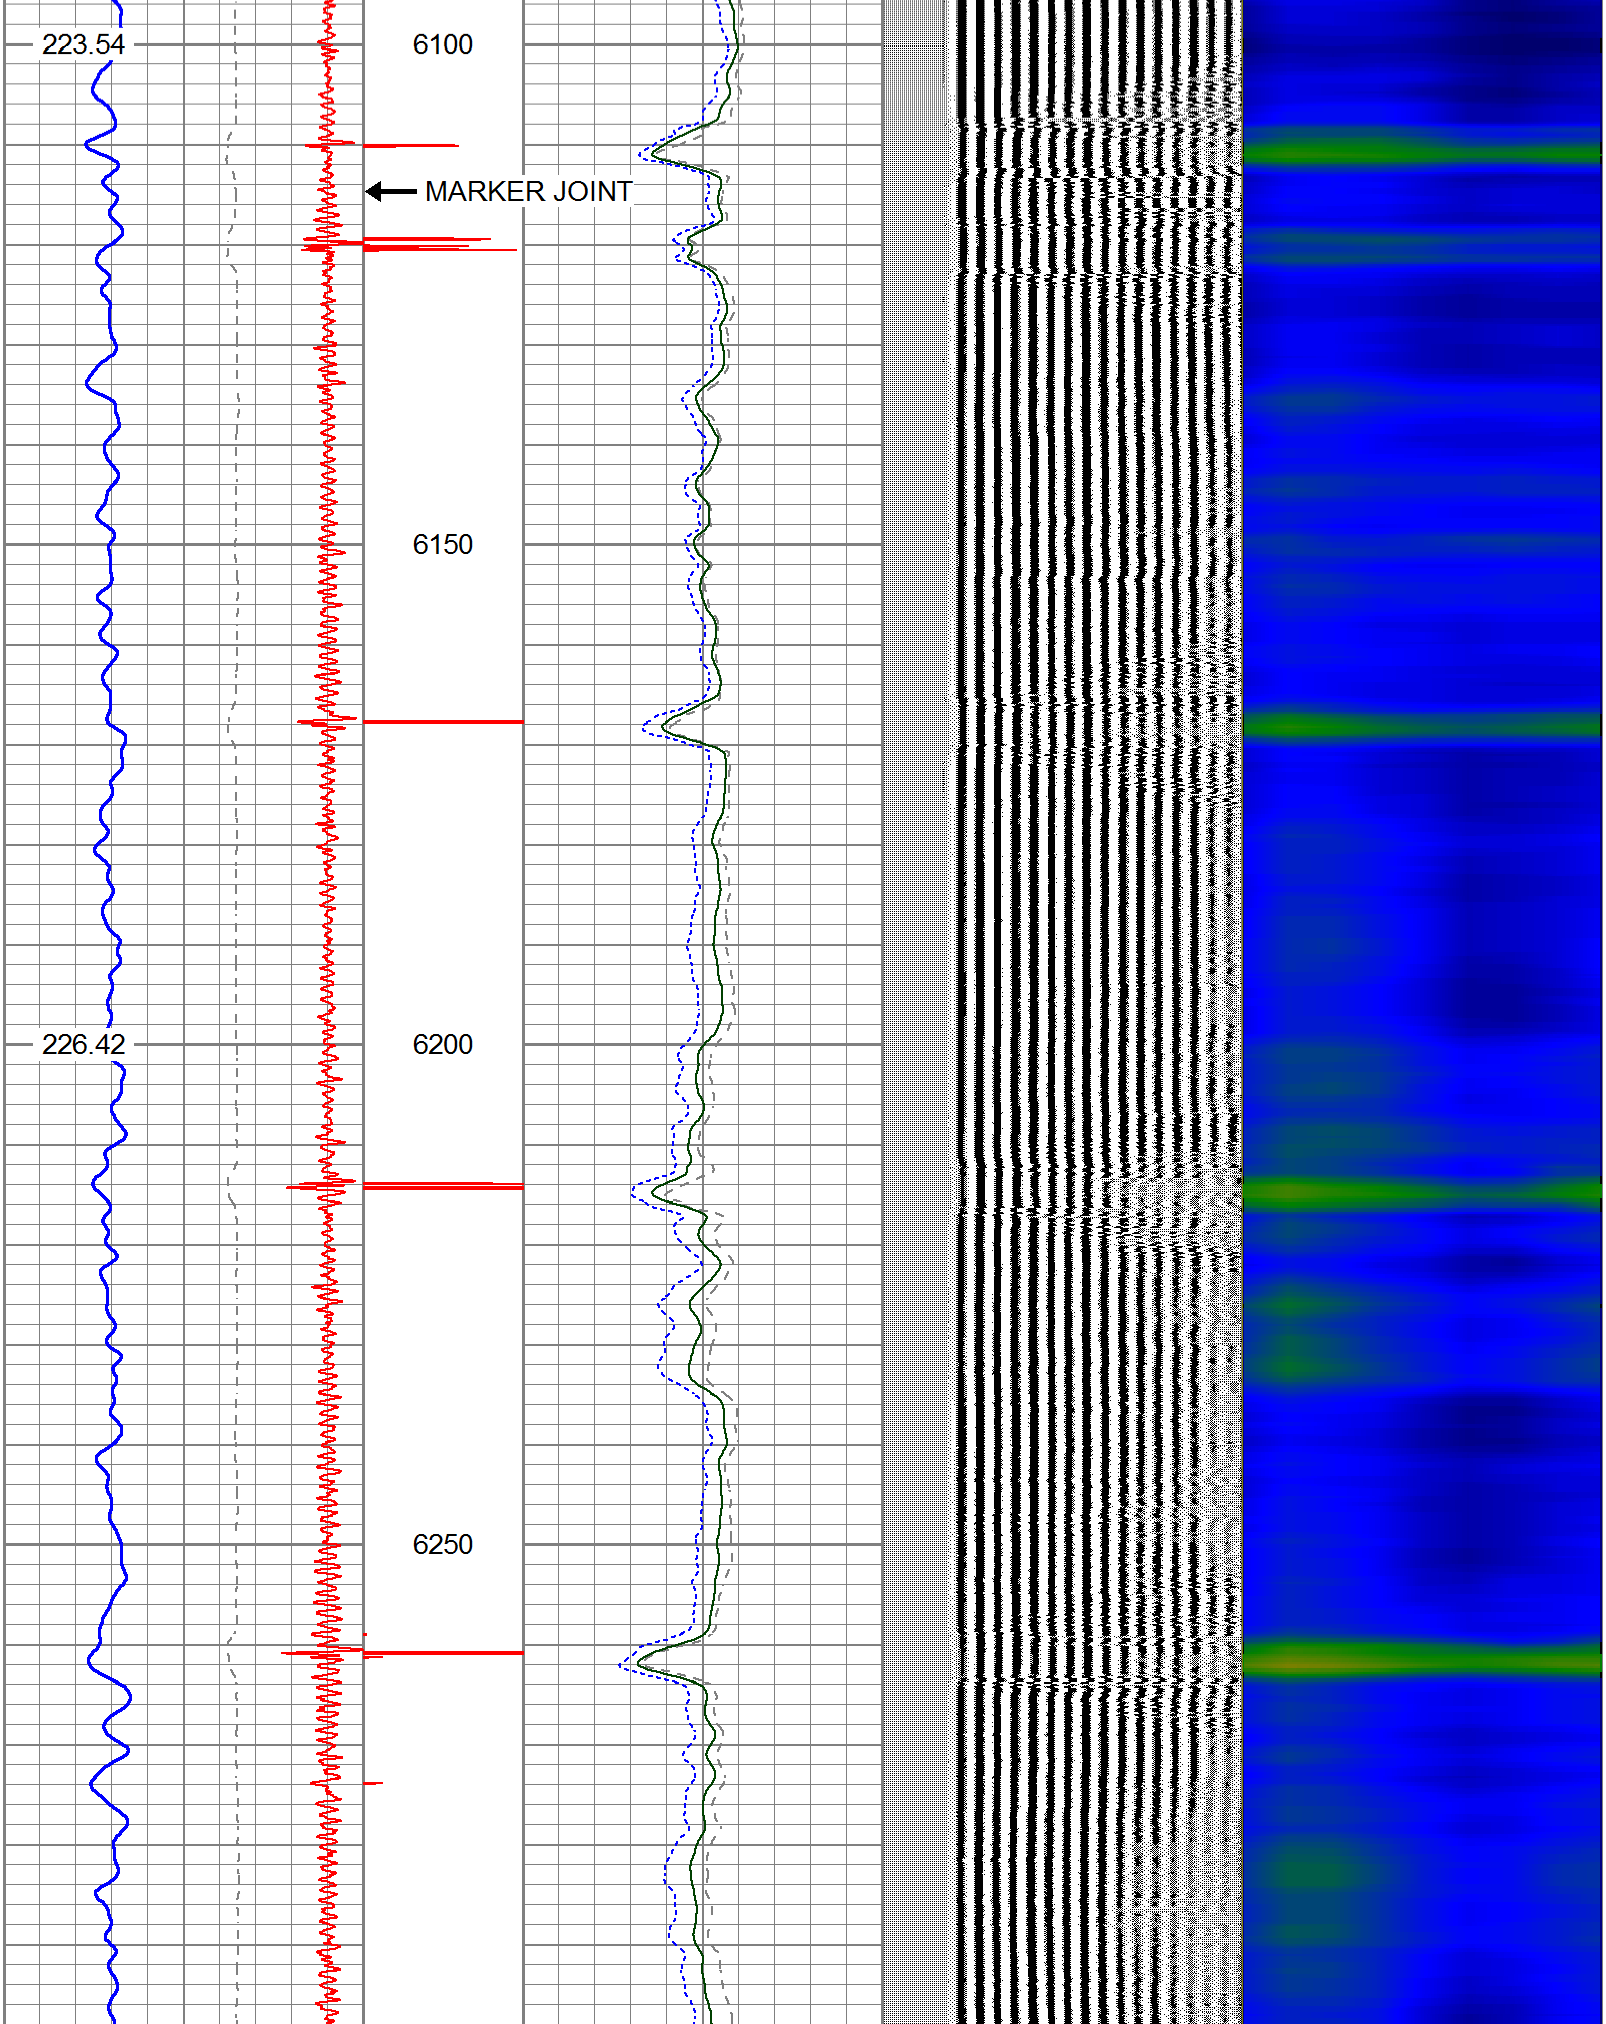
223.54
6100
MARKER JOINT
6150
226.42
6200
6250

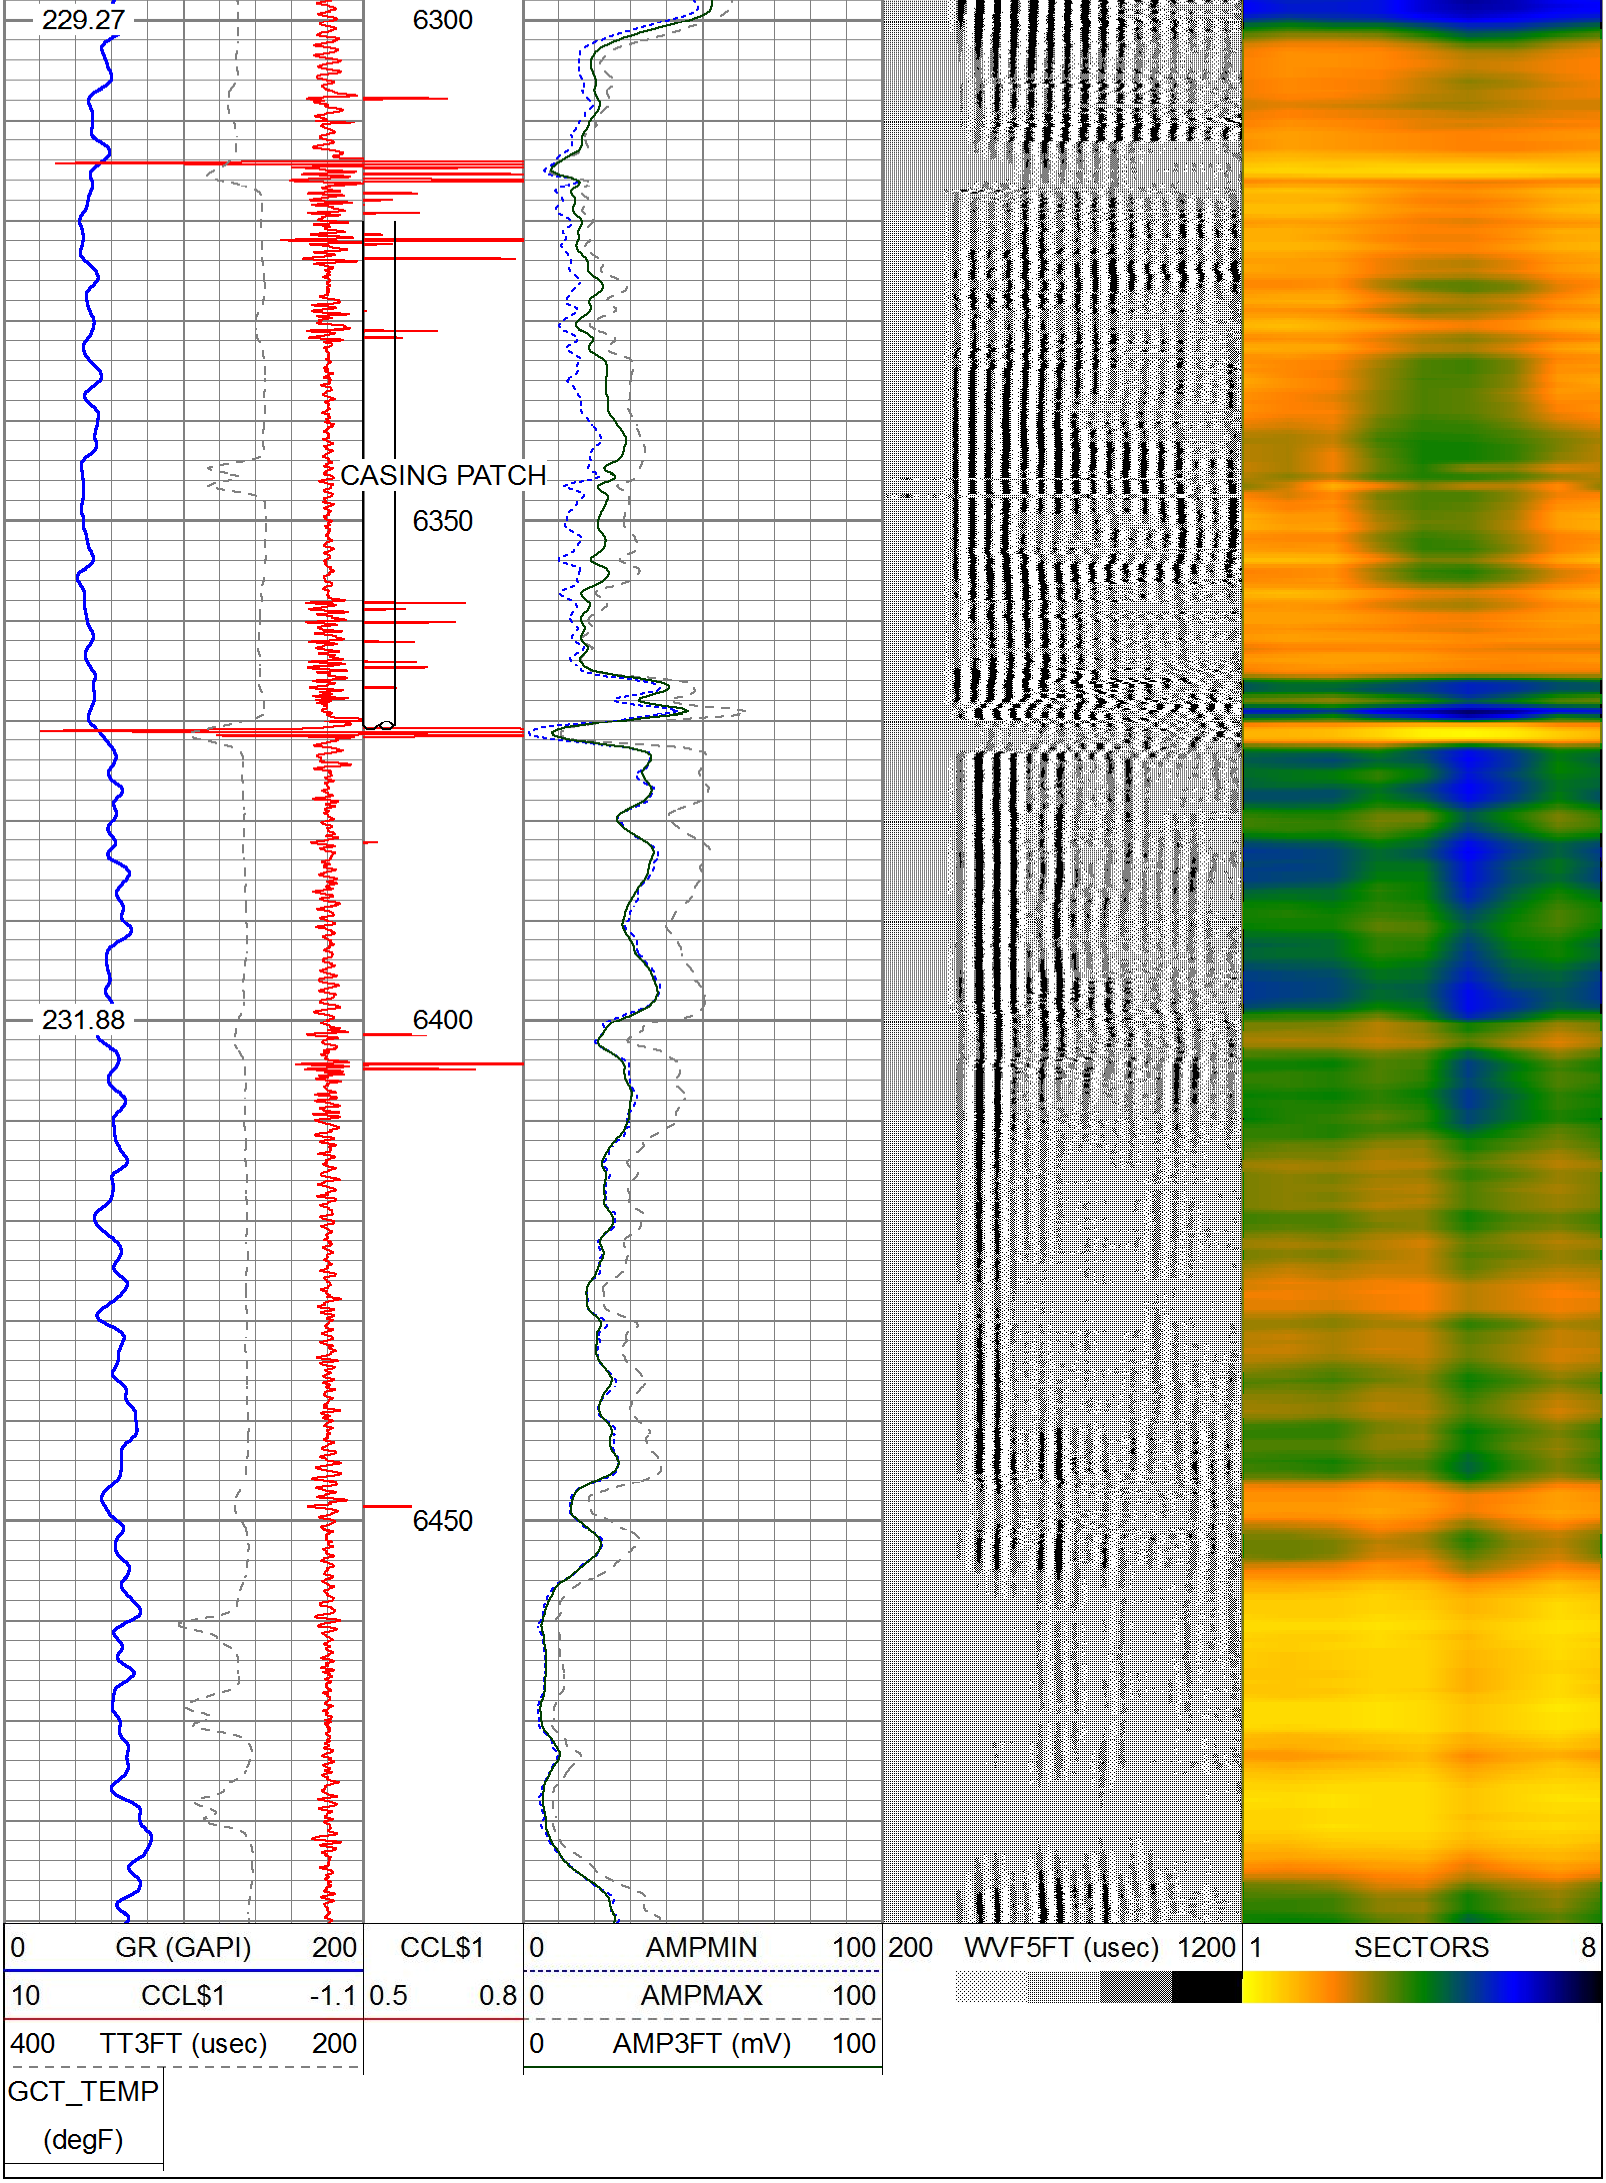
229.27
6300
CASING PATCH
6350
231.88
6400
6450
0 GR (GAPI) 200
10 CCL$1 -1.1
400 TT3FT (usec) 200
GCT_TEMP (degF)
CCL$1
0.5 0.8
0 AMPMIN 100
0 AMPMAX 100
0 AMP3FT (mV) 100
200 WVF5FT (usec) 1200
1 SECTORS 8