

# Well

Operator  
Location  
County  
State  
Field  
Footages  
At Surface:  
Elevations

**WHEELER 32-1**  
EnCana Oil & Gas (USA) Inc.  
SW NE SECTION 1-T1N-R69W, 6<sup>TH</sup> P.M.  
**BOULDER**  
Colorado  
Wattenberg  
1970' FNL & 2206' FEL  
4979' KB  
4963' GR  
API 05-013-06507-00

Spud Date 02-21-2005  
TD Date 02-28-2005

## Log Tops

Sussex 4273.9'  
Sussex Mkr. 4554.9'  
Shannon 4839.7'  
Sharon Spgs 7207.5'  
Niobrara 7259.4'  
Codell 7591.8'  
J Sand 8022.9'  
Log TD 8190.0'

## Production Casing and Cement

4-1/2", 11.6 ppf landed @ 8186'  
Cemented with 300 sxs


### DV Tool

Set @ 5210'  
Cemented with 300 sxs

### CBP

Set @ 7710'  
03-09-05  
Drilled out on 04-03-05

8189' — Driller's TD

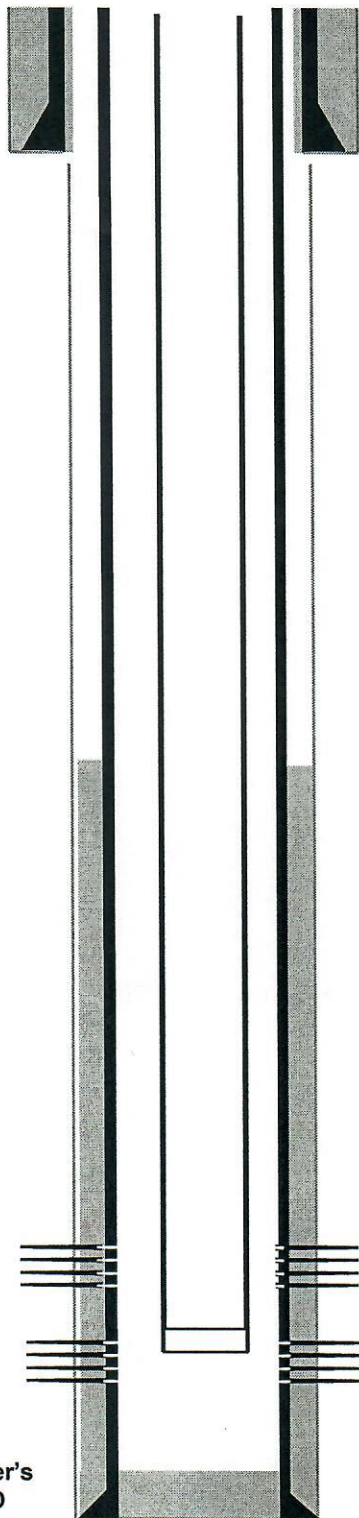

RECEIVED

MAY -2 05

COGCC



01445434

## Surface Hole

12-1/4"

## Surface Casing

24# 8-5/8" landed @ 904'  
Cemented with 388 sxs

## Main Hole

7-7/8" to TD

## Production Tubing

2-3/8" landed @ 8041'



## Codell Perfs

7593' - 7613'  
4 spf  
80 holes  
Frac'd the Codell  
(7593' - 7613') with 111,426  
gal frac fluid and 196,629#  
sand  
03-13-05

## J Sand Perfs

8040' - 8060'  
2 spf  
40 holes  
Frac'd the J Sand  
(8040' - 8060')  
with 207,862 gal frac fluid with  
300,700# sand  
03-08-05