



Fawn 2734-2833

304.c.(3): Light Mitigation Plan

- This plan is being submitted as a substantially equivalent document
- This plan is part of the 1041 WOGLA application
- This plan conforms to 304c.(3) and shows compliance to 424(a)(2) and 424(c). No permanent production lighting will be on this location

This is the plan submitted to Weld County. It identifies BMPs related to lighting and shows compliance with the lumen thresholds for hardscape during pre-production activities.

A photometric plan is attached that indicates compliance to Weld County Code 21-5-405. Each phase of construction is less than 12 lumens/sq. ft of hardscape.

Drilling: 5.143 lumens/sq ft.

Completions: 7.94 lumens/sq ft.

Flowback: 4.16 lumens/sq ft.


Drill-out: 4.16 lumens/sq ft.

Verdad will provide sufficient on-site lighting to ensure the safety of all persons on a or near the site. Verdad will reduce lighting within well pad to the minimal level for safe pre-production activity. Verdad will locate the facility lighting beneath the sound walls, except for drilling rig lights. The sound walls will be on the east, north and west perimeter of the pad. Light fixtures mounted on the sound barriers will be placed beneath the top of the wall and angled in a downward and inward, such that no light shines above the horizontal plan passing through the center point light source. Verdad will position lights in a downward direction where vertical light is not required and angle light away from off-site buildings.

Verdad will use appropriate technology within fixtures that obscures, blocks, or diffuses the light to reduce light intensity outside the boundaries of the Oil and Gas Facility, such as light sensors that automatically switch light sensors on and off on light masts, no glare or low glare lighting and LED fixtures, as feasible, to reduce skyglow.


During production, operations would typically only occur during daylight hours. No permanent lighting is anticipated on the site during production operations. Therefore, no photometric plan is attached for this phase of development.

CERTIFICATE
 THIS ALSO CERTIFIES THAT I HAVE
 RELATIVE EXPERIENCE IN LIGHT
 MITIGATION TECHNIQUES AND DESIGN.



NOTES:

- MEASURED LIGHT INTENSITY LEVEL WITH RESPECT TO WORK AREAS, OUTDOOR SPACES, AND UNATTENDED EQUIPMENT AREAS. ILLUMINANCE UNITS IS GIVEN IN Fc [1 fc = 10.8 Lux].
- LIGHTING LEVELS SHOWN ON THIS PLAN ARE IN ADDITION TO LEVELS ON THE DRILLING RIG. DIRECT LIGHTING FROM DRILLING OPERATIONS WILL BE CONFINED WITHIN THE 100 FT EDGE OF PAD OFF-SET BOUNDARY.
- DRILLING RIG LIGHTING WILL BE PRESENT ONLY DURING THE DRILLING PHASE.
- TOTAL PAD AREA = ± 6.73 ACRES, 293,200 Sq. Ft.
- 1,507,617 TOTAL LUMENS. 5.142 LUMENS/SQ. FT.

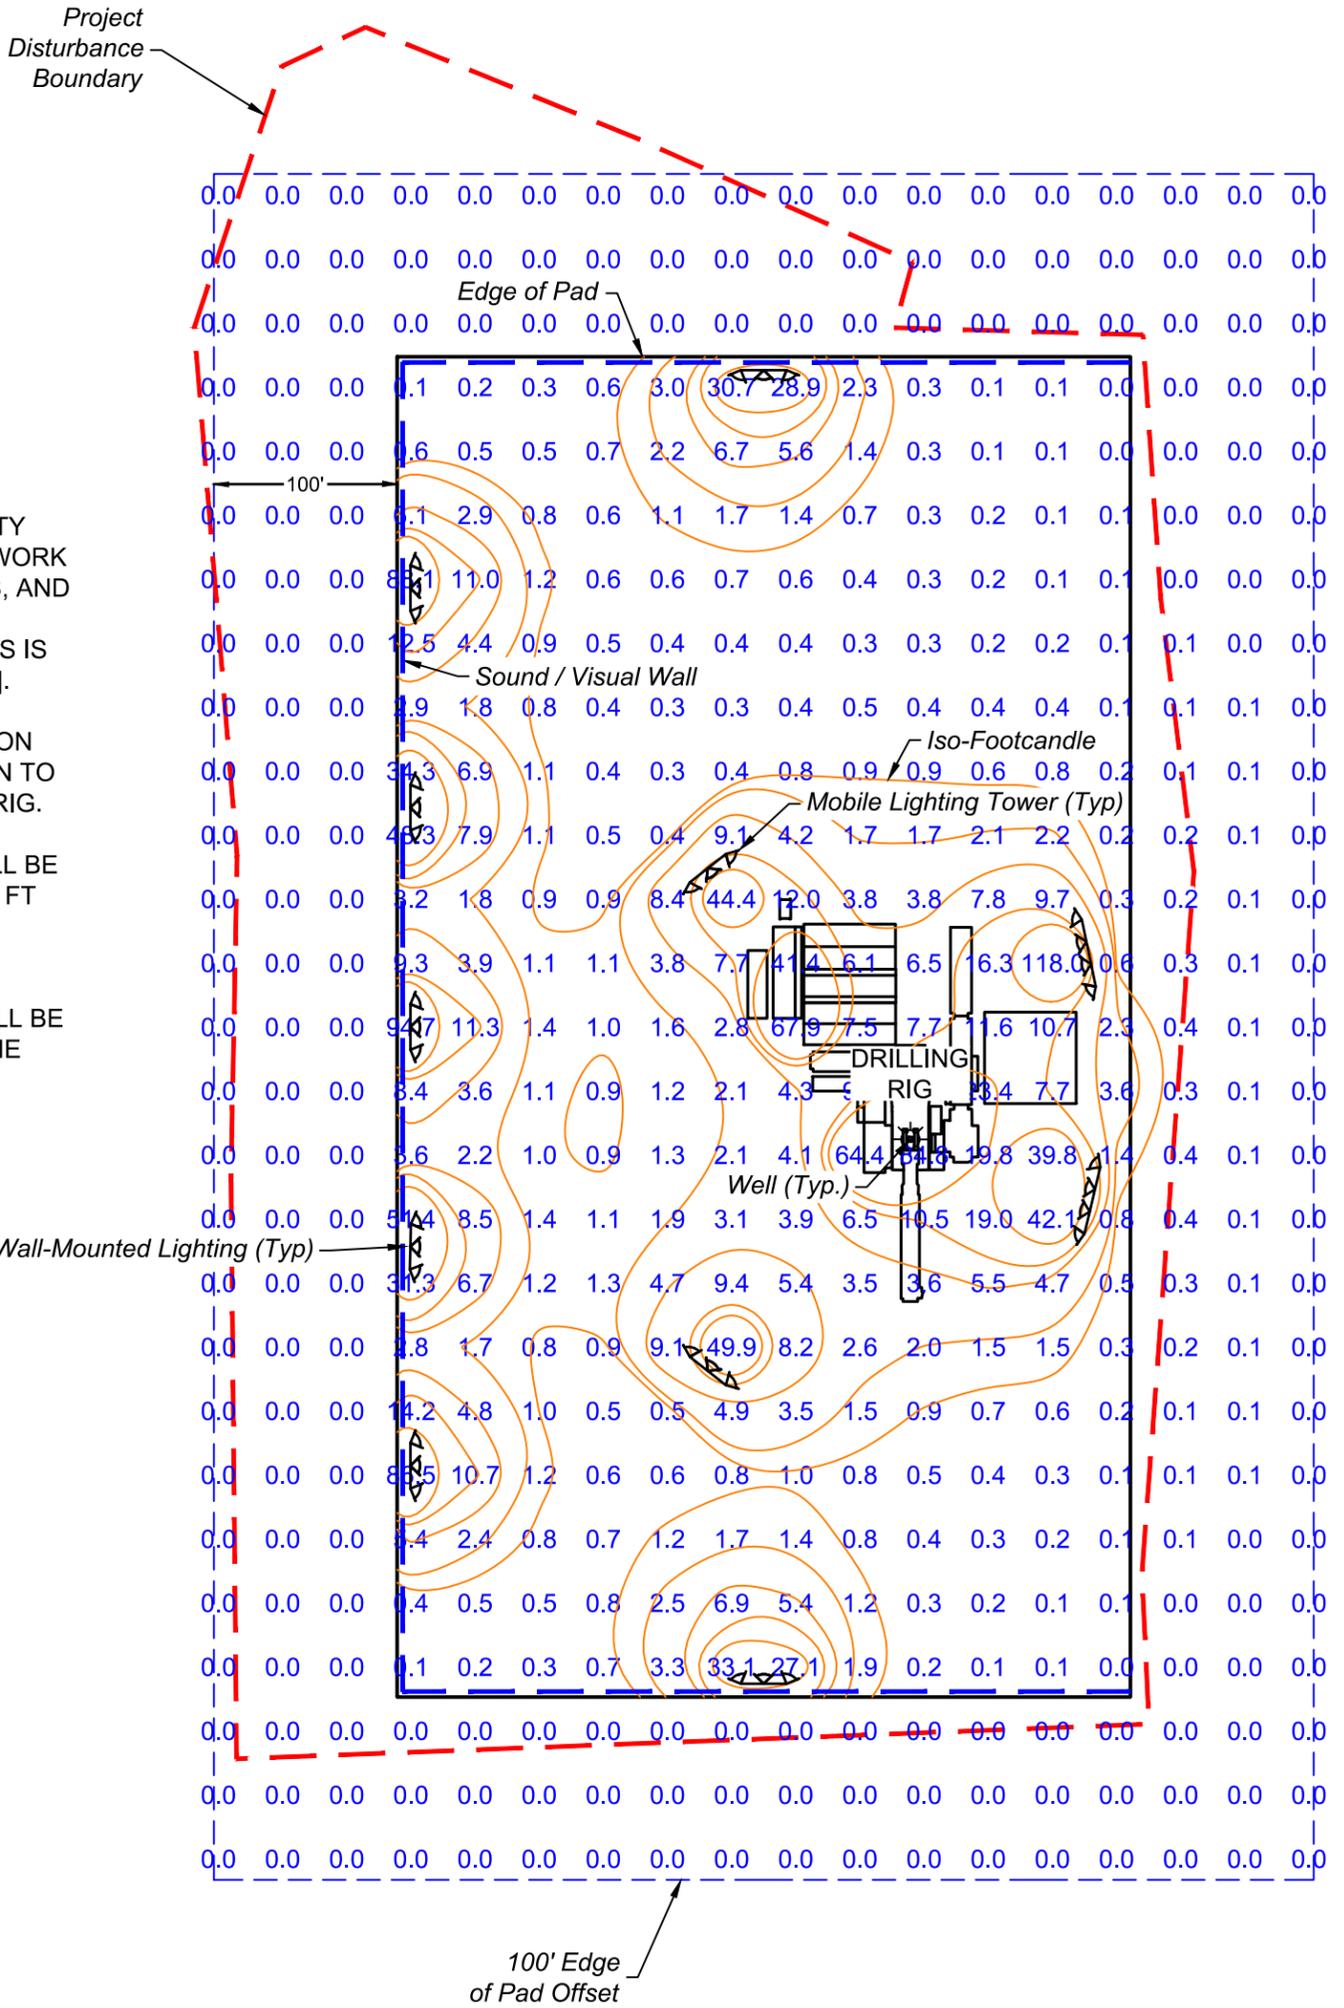

1 DRILLING PAD SITE LIGHTING PHOTOMETRIC PLAN
 SCALE: 1" = 100'

LIGHTING FIXTURE SCHEDULE									
SYMBOL	LIGHT UNIT DESCRIPTION	BUG RATING	MOUNTING INFO	VOLTS	LAMP QUANTITY	LUMENS / LAMP	UNITS QUANTITY	LUMENS / UNIT	TOTAL LUMENS
	3 HEAD LED FLOOD LIGHTS, MOBILE TELESCOPING TOWER	B3-U3-G5	25' TOWER	120	3	45,171	2	135,513	271,026
	3 HEAD LED FLOOD LIGHTS, WALL MOUNT	B3-U3-G5	25' WALL	120	3	45,171	7	135,513	948,591
	4 HEAD FLOOD LIGHT METAL HALIDE LAMP, DEISEL POWERED TEMPORARY LIGHTING TOWER	B3-U3-G5	23' TOWER	120	4	36,000	2	144,000	288,000

VERDAD RESOURCES LLC



FAWN 2734-2833 PAD
 S 1/2, SECTION 22, T1N, R65W, 6th P.M.
 WELD COUNTY, COLORADO




UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017

SCALE: AS NOTED	DRAWN BY: C.C.	DATE DRAWN: 02-18-22
UELS FILE NO.: V - 179	REVISED: 03-21-22 C.C.	
DRILLING OPERATIONS PHOTOMETRIC PLAN		

CERTIFICATE
 THIS ALSO CERTIFIES THAT I HAVE
 RELATIVE EXPERIENCE IN LIGHT
 MITIGATION TECHNIQUES AND DESIGN.

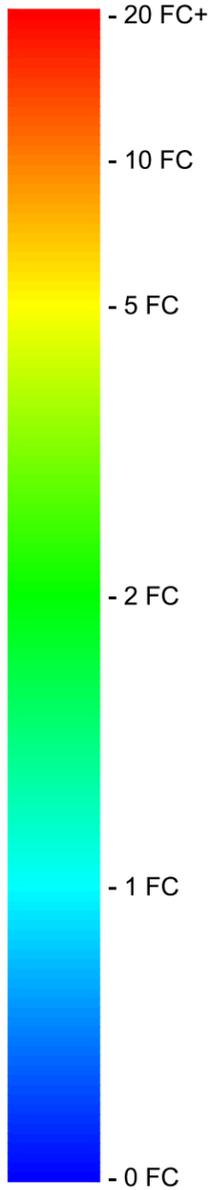

Project
Disturbance
Boundary

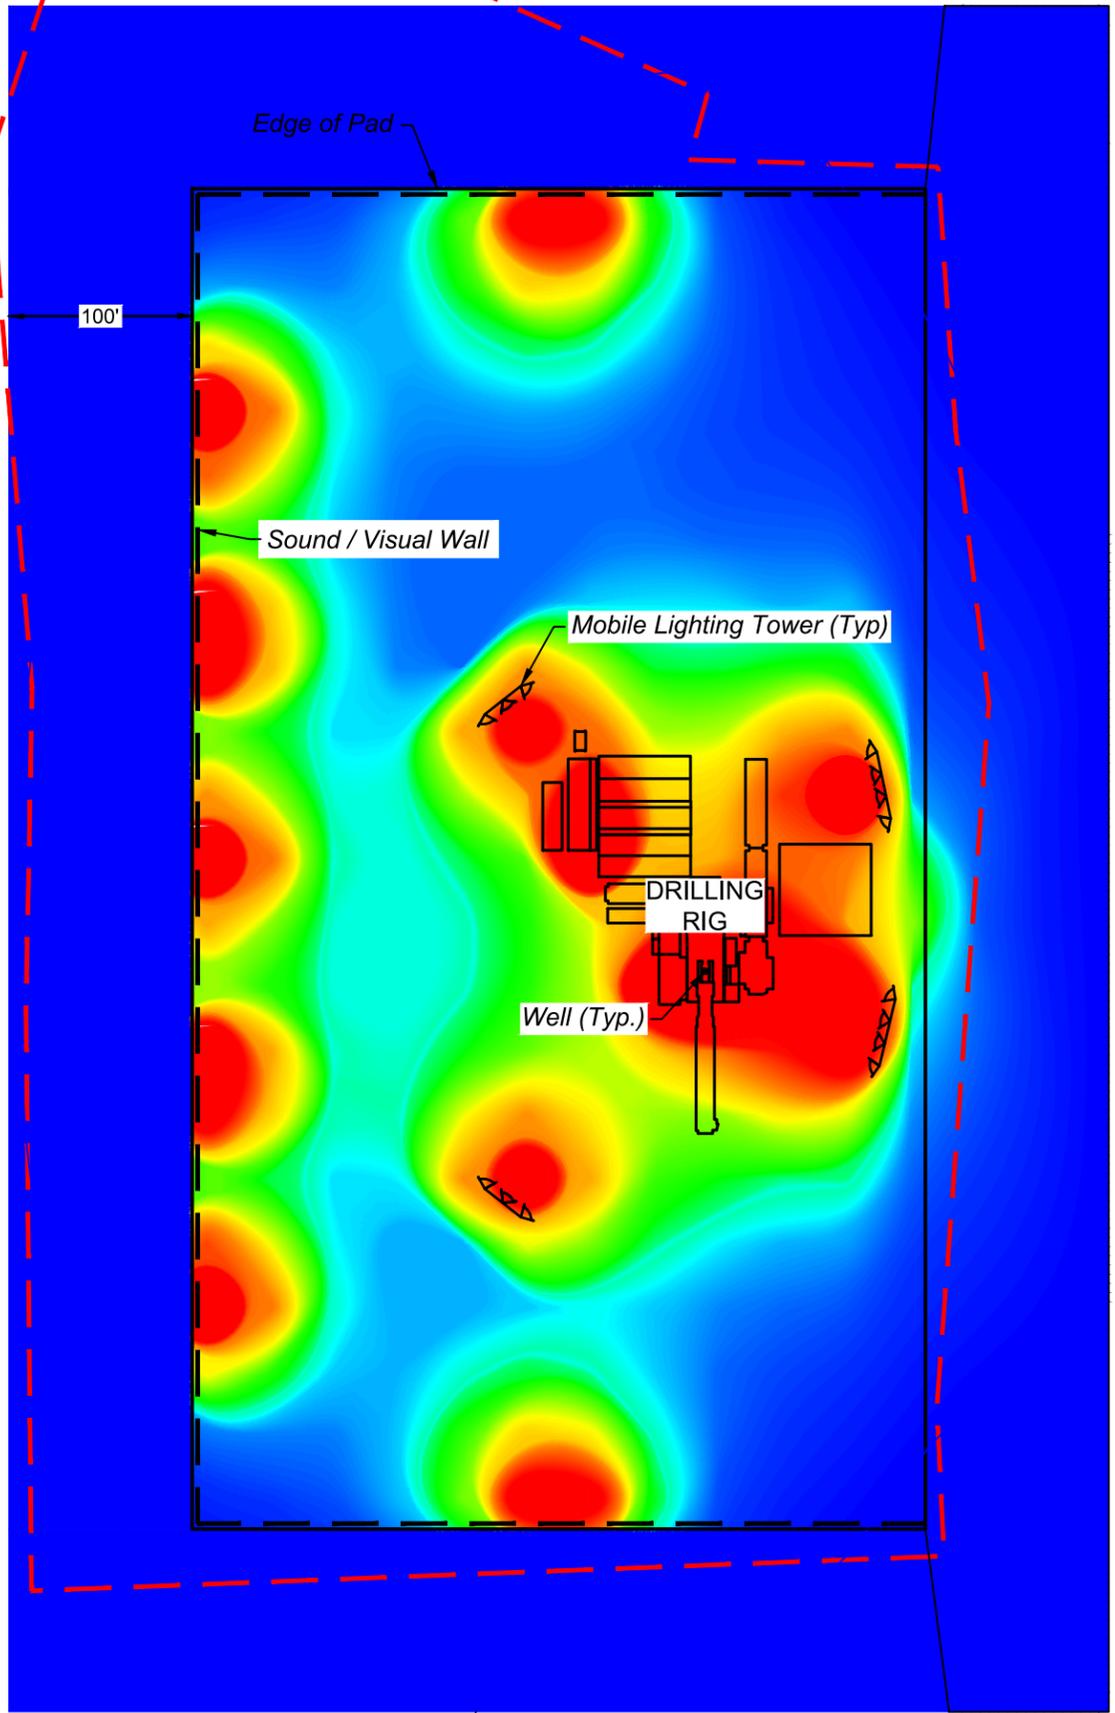

1 DRILLING PAD SITE LIGHTING PHOTOMETRIC PLAN
 SCALE: 1" = 100'

LIGHTING FIXTURE SCHEDULE									
SYMBOL	LIGHT UNIT DESCRIPTION	BUG RATING	MOUNTING INFO	VOLTS	LAMP QUANTITY	LUMENS / LAMP	UNITS QUANTITY	LUMENS / UNIT	TOTAL LUMENS
	3 HEAD LED FLOOD LIGHTS, MOBILE TELESCOPING TOWER	B3-U3-G5	25' TOWER	120	3	45,171	2	135,513	271,026
	3 HEAD LED FLOOD LIGHTS, WALL MOUNT	B3-U3-G5	25' WALL	120	3	45,171	7	135,513	948,591
	4 HEAD FLOOD LIGHT METAL HALIDE LAMP, DEISEL POWERED TEMPORARY LIGHTING TOWER	B3-U3-G5	23' TOWER	120	4	36,000	2	144,000	288,000

VERDAD RESOURCES LLC


FAWN 2734-2833 PAD
 S 1/2, SECTION 22, T1N, R65W, 6th P.M.
 WELD COUNTY, COLORADO



UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017


SCALE: AS NOTED	DRAWN BY: C.C.	DATE DRAWN: 02-18-22
UELS FILE NO.: V - 1 7 9	REVISED: 03-21-22 C.C.	
DRILLING OPERATIONS HEAT MAP		

CERTIFICATE
 THIS ALSO CERTIFIES THAT I HAVE
 RELATIVE EXPERIENCE IN LIGHT
 MITIGATION TECHNIQUES AND DESIGN.



NOTES:

1. MEASURED LIGHT INTENSITY LEVEL WITH RESPECT TO WORK AREAS, OUTDOOR SPACES, AND UNATTENDED EQUIPMENT AREAS. ILLUMINANCE UNITS IS GIVEN IN Fc [1 fc = 10.8 Lux].
2. DIRECT LIGHTING FROM HYDRAULIC STIMULATION OPERATIONS WILL BE CONFINED WITHIN THE 100 FT EDGE OF PAD OFF-SET BOUNDARY.
3. TOTAL PAD AREA = ± 6.73 ACRES, 293,200 Sq. Ft.
4. 2,329,182 TOTAL LUMENS. 7.944 LUMENS/SQ. FT.

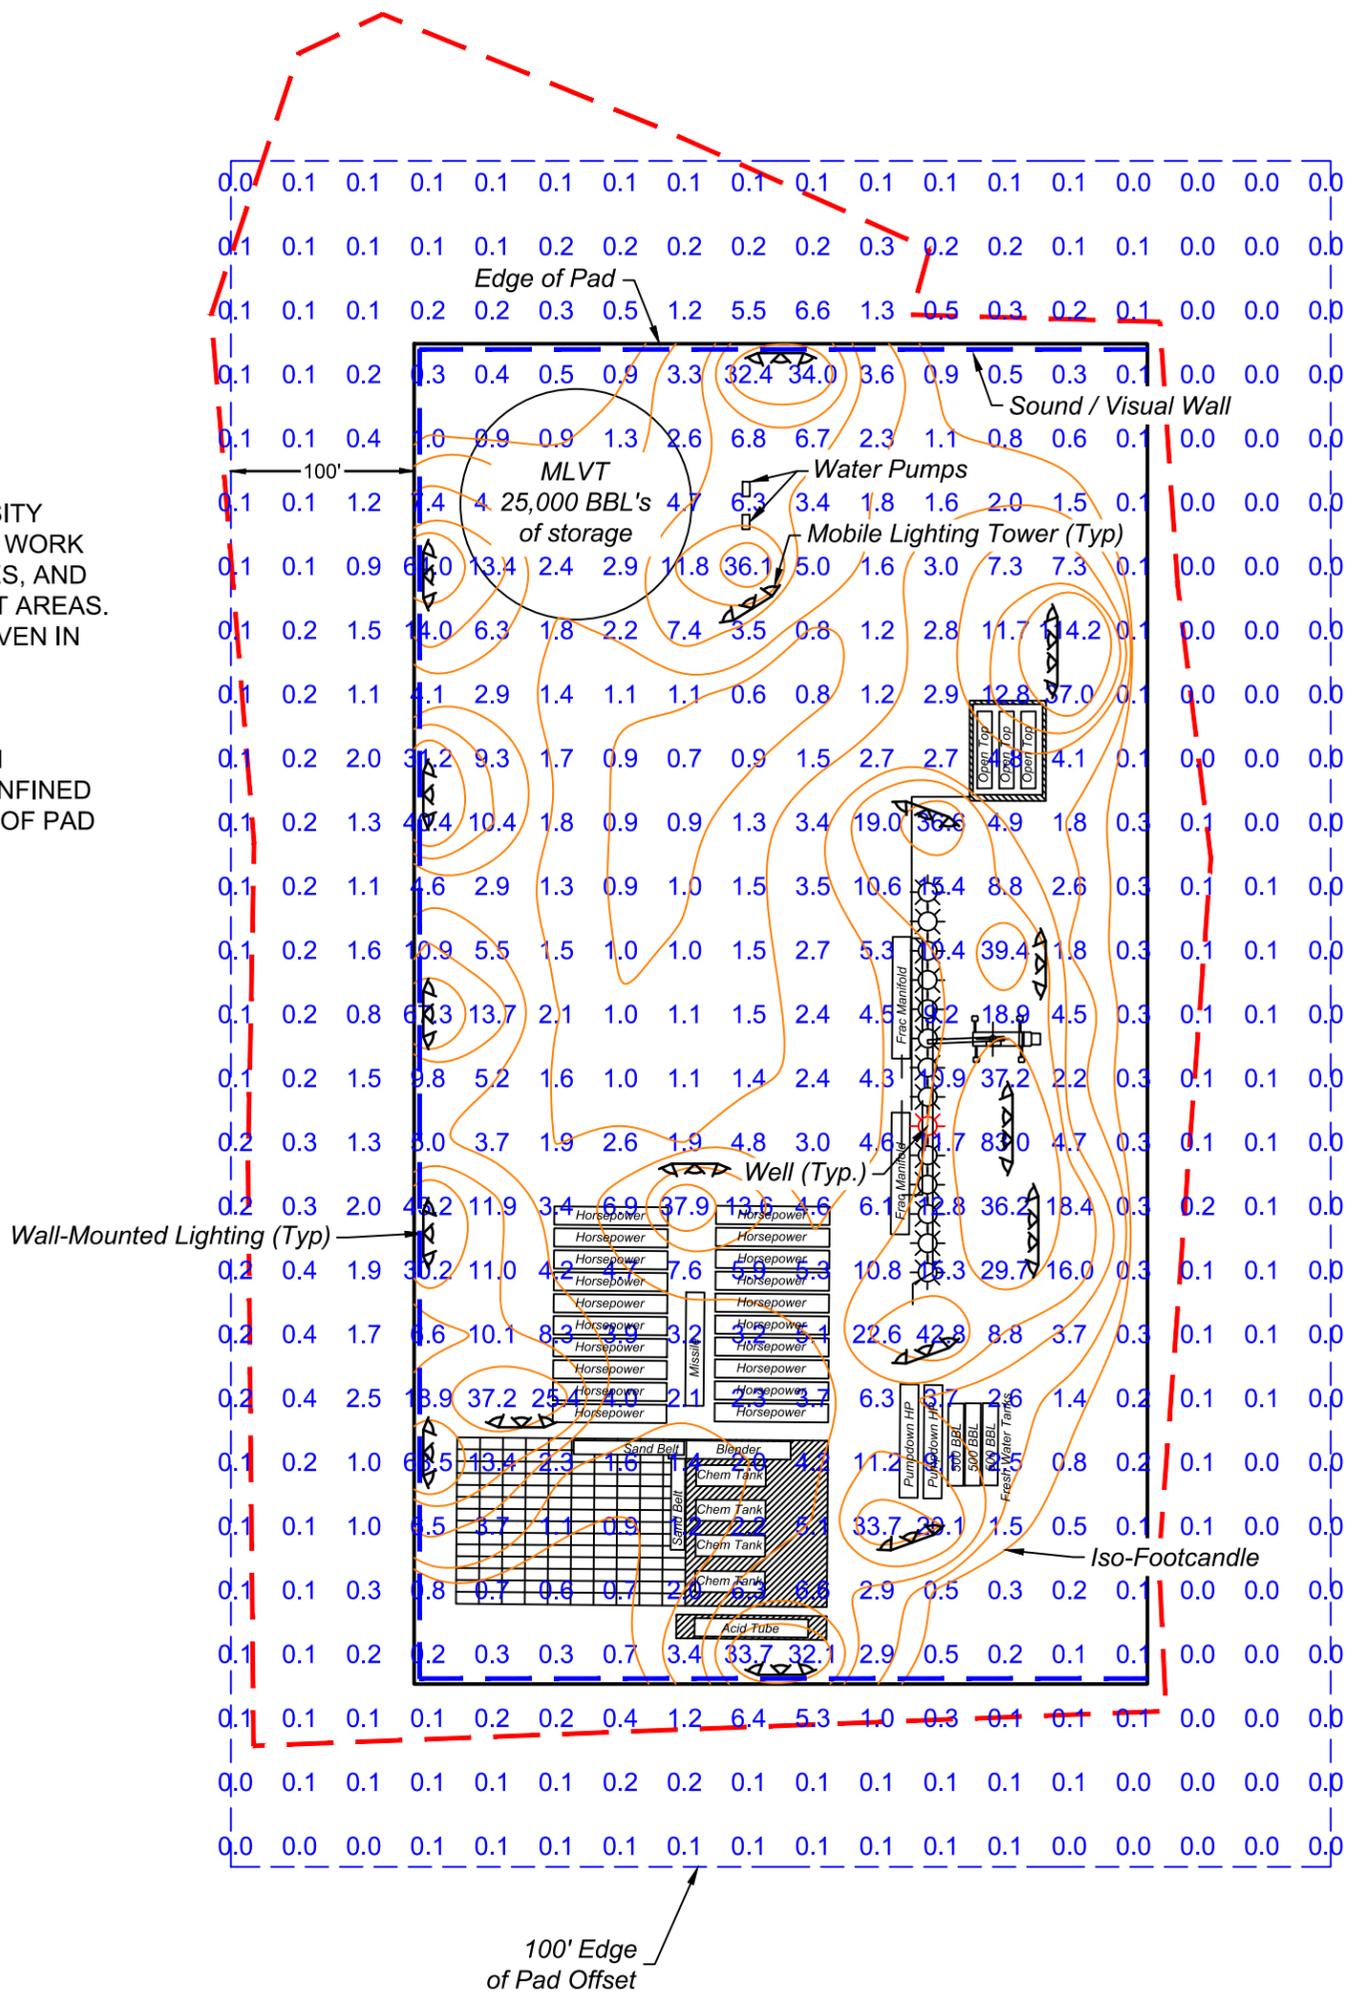

1 DRILLING PAD SITE LIGHTING PHOTOMETRIC PLAN
 SCALE: 1" = 100'

LIGHTING FIXTURE SCHEDULE									
SYMBOL	LIGHT UNIT DESCRIPTION	BUG RATING	MOUNTING INFO	VOLTS	LAMP QUANTITY	LUMENS / LAMP	UNITS QUANTITY	LUMENS / UNIT	TOTAL LUMENS
	3 HEAD LED FLOOD LIGHTS, MOBILE TELESCOPING TOWER	B3-U3-G5	25' TOWER/ 25' WALL	120	3	45,171	7	135,513	948,591
	3 HEAD LED FLOOD LIGHTS, WALL MOUNT	B3-U3-G5	25' WALL	120	3	45,171	7	135,513	948,591
	4 HEAD FLOOD LIGHT 400W METAL HALIDE LAMP, DEISEL POWERED TEMPORARY LIGHTING TOWER	B3-U3-G5	23' TOWER	120	4	36,000	3	144,000	432,000

VERDAD RESOURCES LLC

FAWN 2734-2833 PAD
 S 1/2, SECTION 22, T1N, R65W, 6th P.M.
 WELD COUNTY, COLORADO




SCALE: AS NOTED | DRAWN BY: C.C. | DATE DRAWN: 02-18-22
 UELS FILE NO.: V - 1 7 9 | REVISED: 03-21-22 C.C.

HYDRAULIC STIMULATION OPERATIONS
 PHOTOMETRIC PLAN



UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017

CERTIFICATE
 THIS ALSO CERTIFIES THAT I HAVE
 RELATIVE EXPERIENCE IN LIGHT
 MITIGATION TECHNIQUES AND DESIGN.

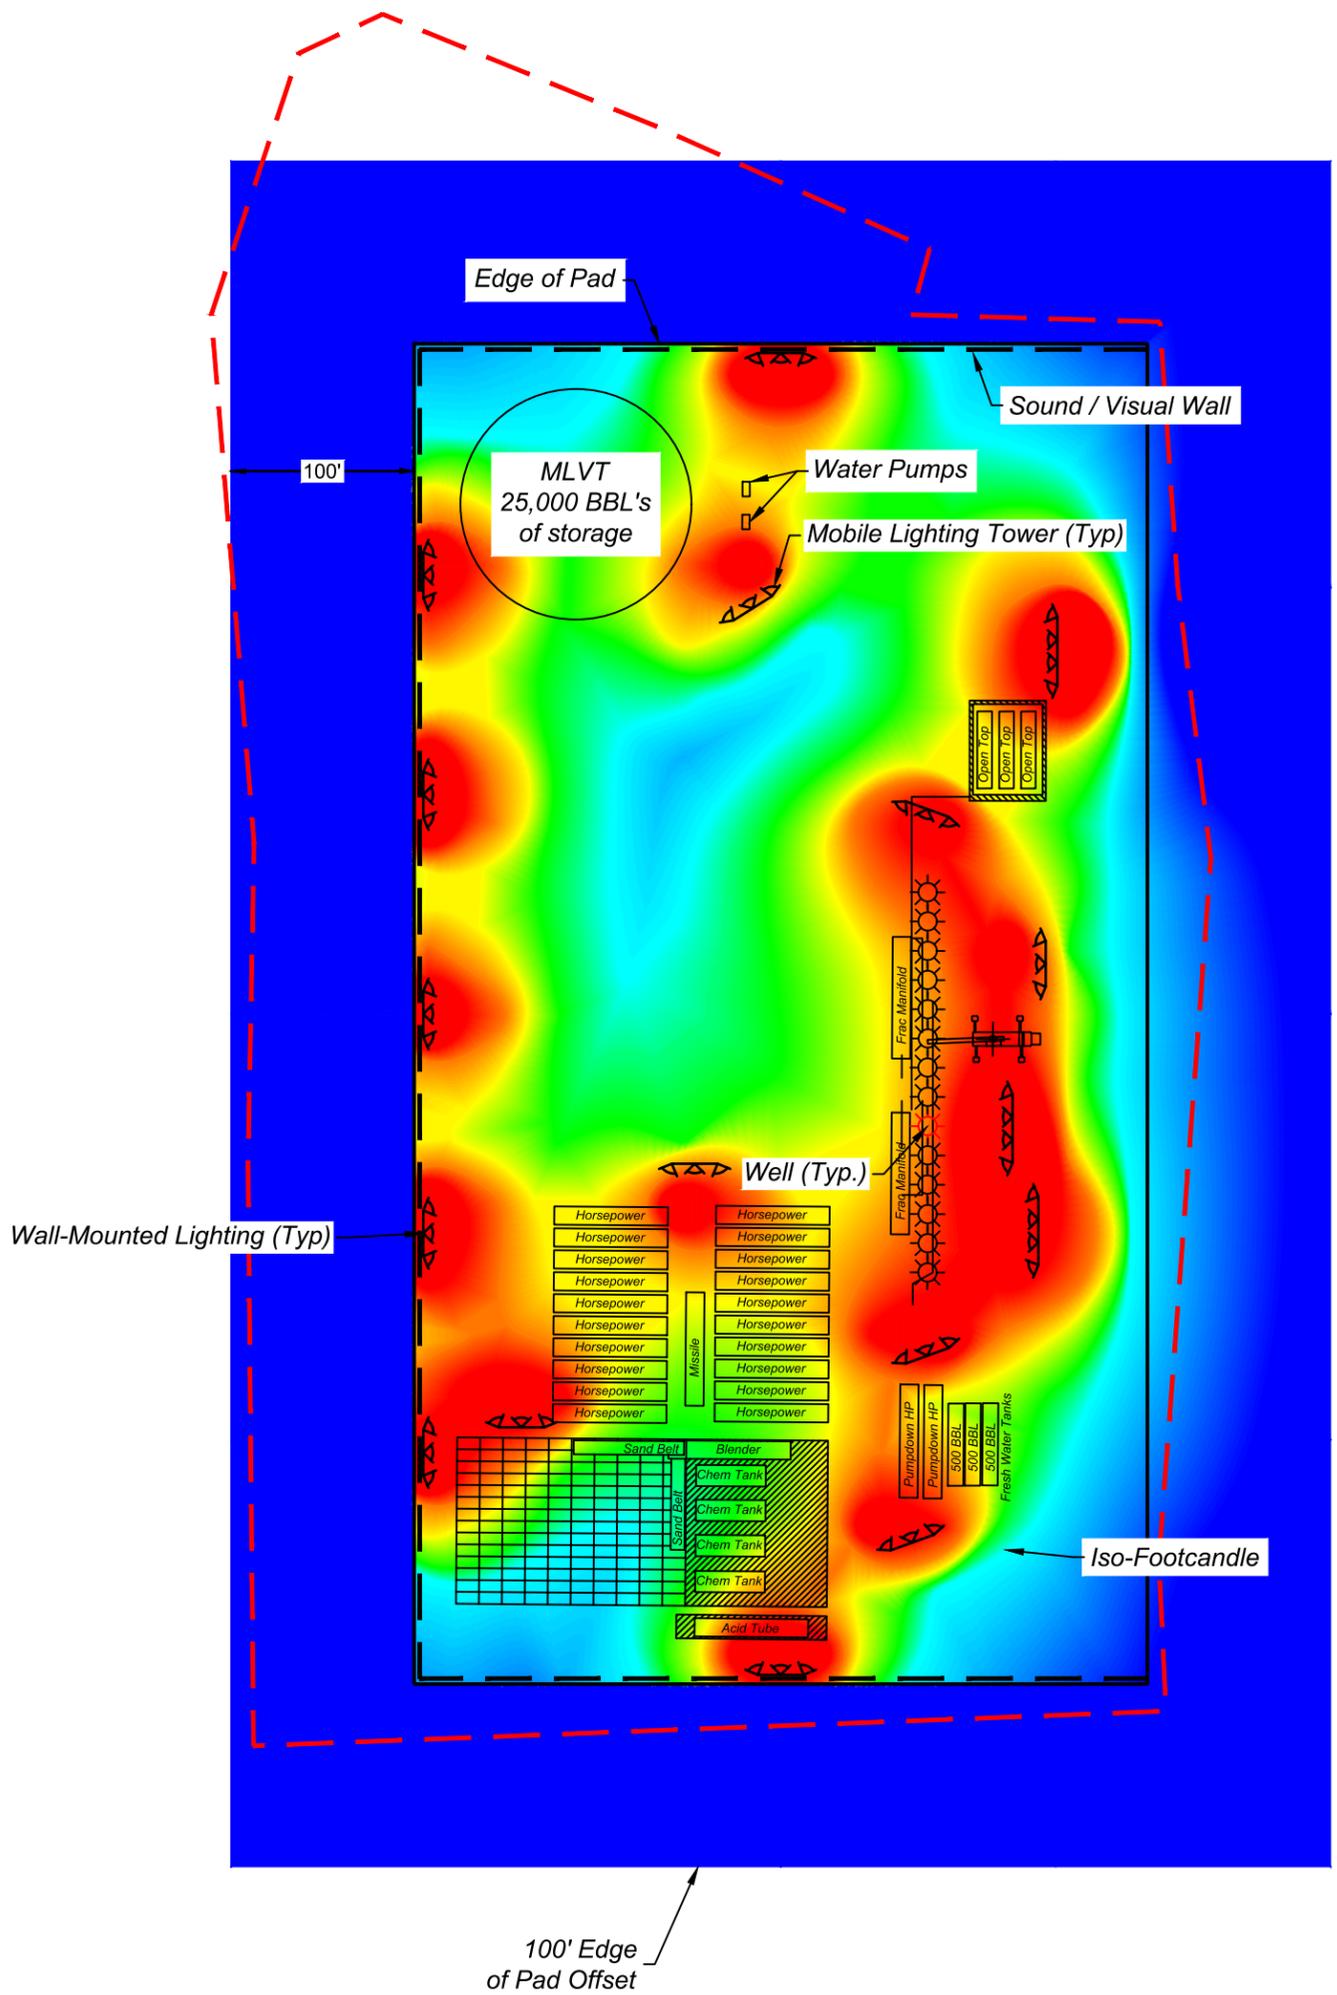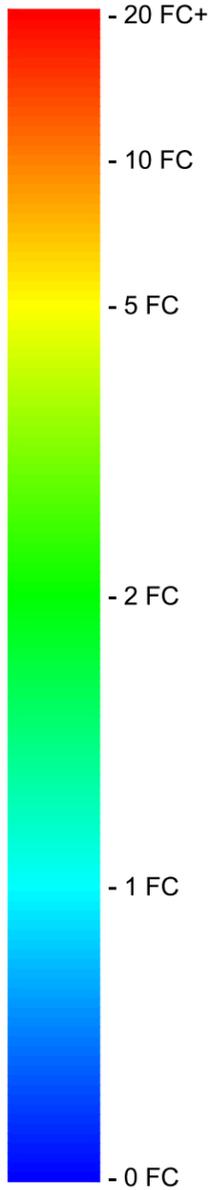

1 DRILLING PAD SITE LIGHTING PHOTOMETRIC PLAN
 SCALE: 1" = 100'

LIGHTING FIXTURE SCHEDULE									
SYMBOL	LIGHT UNIT DESCRIPTION	BUG RATING	MOUNTING INFO	VOLTS	LAMP QUANTITY	LUMENS / LAMP	UNITS QUANTITY	LUMENS / UNIT	TOTAL LUMENS
	3 HEAD LED FLOOD LIGHTS, MOBILE TELESCOPING TOWER	B3-U3-G5	25' TOWER/ 25' WALL	120	3	45,171	7	135,513	948,591
	3 HEAD LED FLOOD LIGHTS, WALL MOUNT	B3-U3-G5	25' WALL	120	3	45,171	7	135,513	948,591
	4 HEAD FLOOD LIGHT 400W METAL HALIDE LAMP, DEISEL POWERED TEMPORARY LIGHTING TOWER	B3-U3-G5	23' TOWER	120	4	36,000	3	144,000	432,000

VERDAD RESOURCES LLC

FAWN 2734-2833 PAD
S 1/2, SECTION 22, T1N, R65W, 6th P.M.
WELD COUNTY, COLORADO


SCALE: AS NOTED | DRAWN BY: C.C. | DATE DRAWN: 02-18-22
 UELS FILE NO.: V - 1 7 9 | REVISED: 03-21-22 C.C.

HYDRAULIC STIMULATION OPERATIONS
HEAT MAP




UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017

CERTIFICATE
 THIS ALSO CERTIFIES THAT I HAVE
 RELATIVE EXPERIENCE IN LIGHT
 MITIGATION TECHNIQUES AND DESIGN.



NOTES:

1. MEASURED LIGHT INTENSITY LEVEL WITH RESPECT TO WORK AREAS, OUTDOOR SPACES, AND UNATTENDED EQUIPMENT AREAS. ILLUMINANCE UNITS IS GIVEN IN Fc [1 fc = 10.8 Lux].
2. DIRECT LIGHTING FROM DRILL-OUT OPERATIONS WILL BE CONFINED WITHIN THE 100 FT EDGE OF PAD OFF-SET BOUNDARY.
3. TOTAL PAD AREA = ± 6.73 ACRES, 293,200 Sq. Ft.
4. 1,219,617 TOTAL LUMENS. 4.160 LUMENS/SQ. FT.

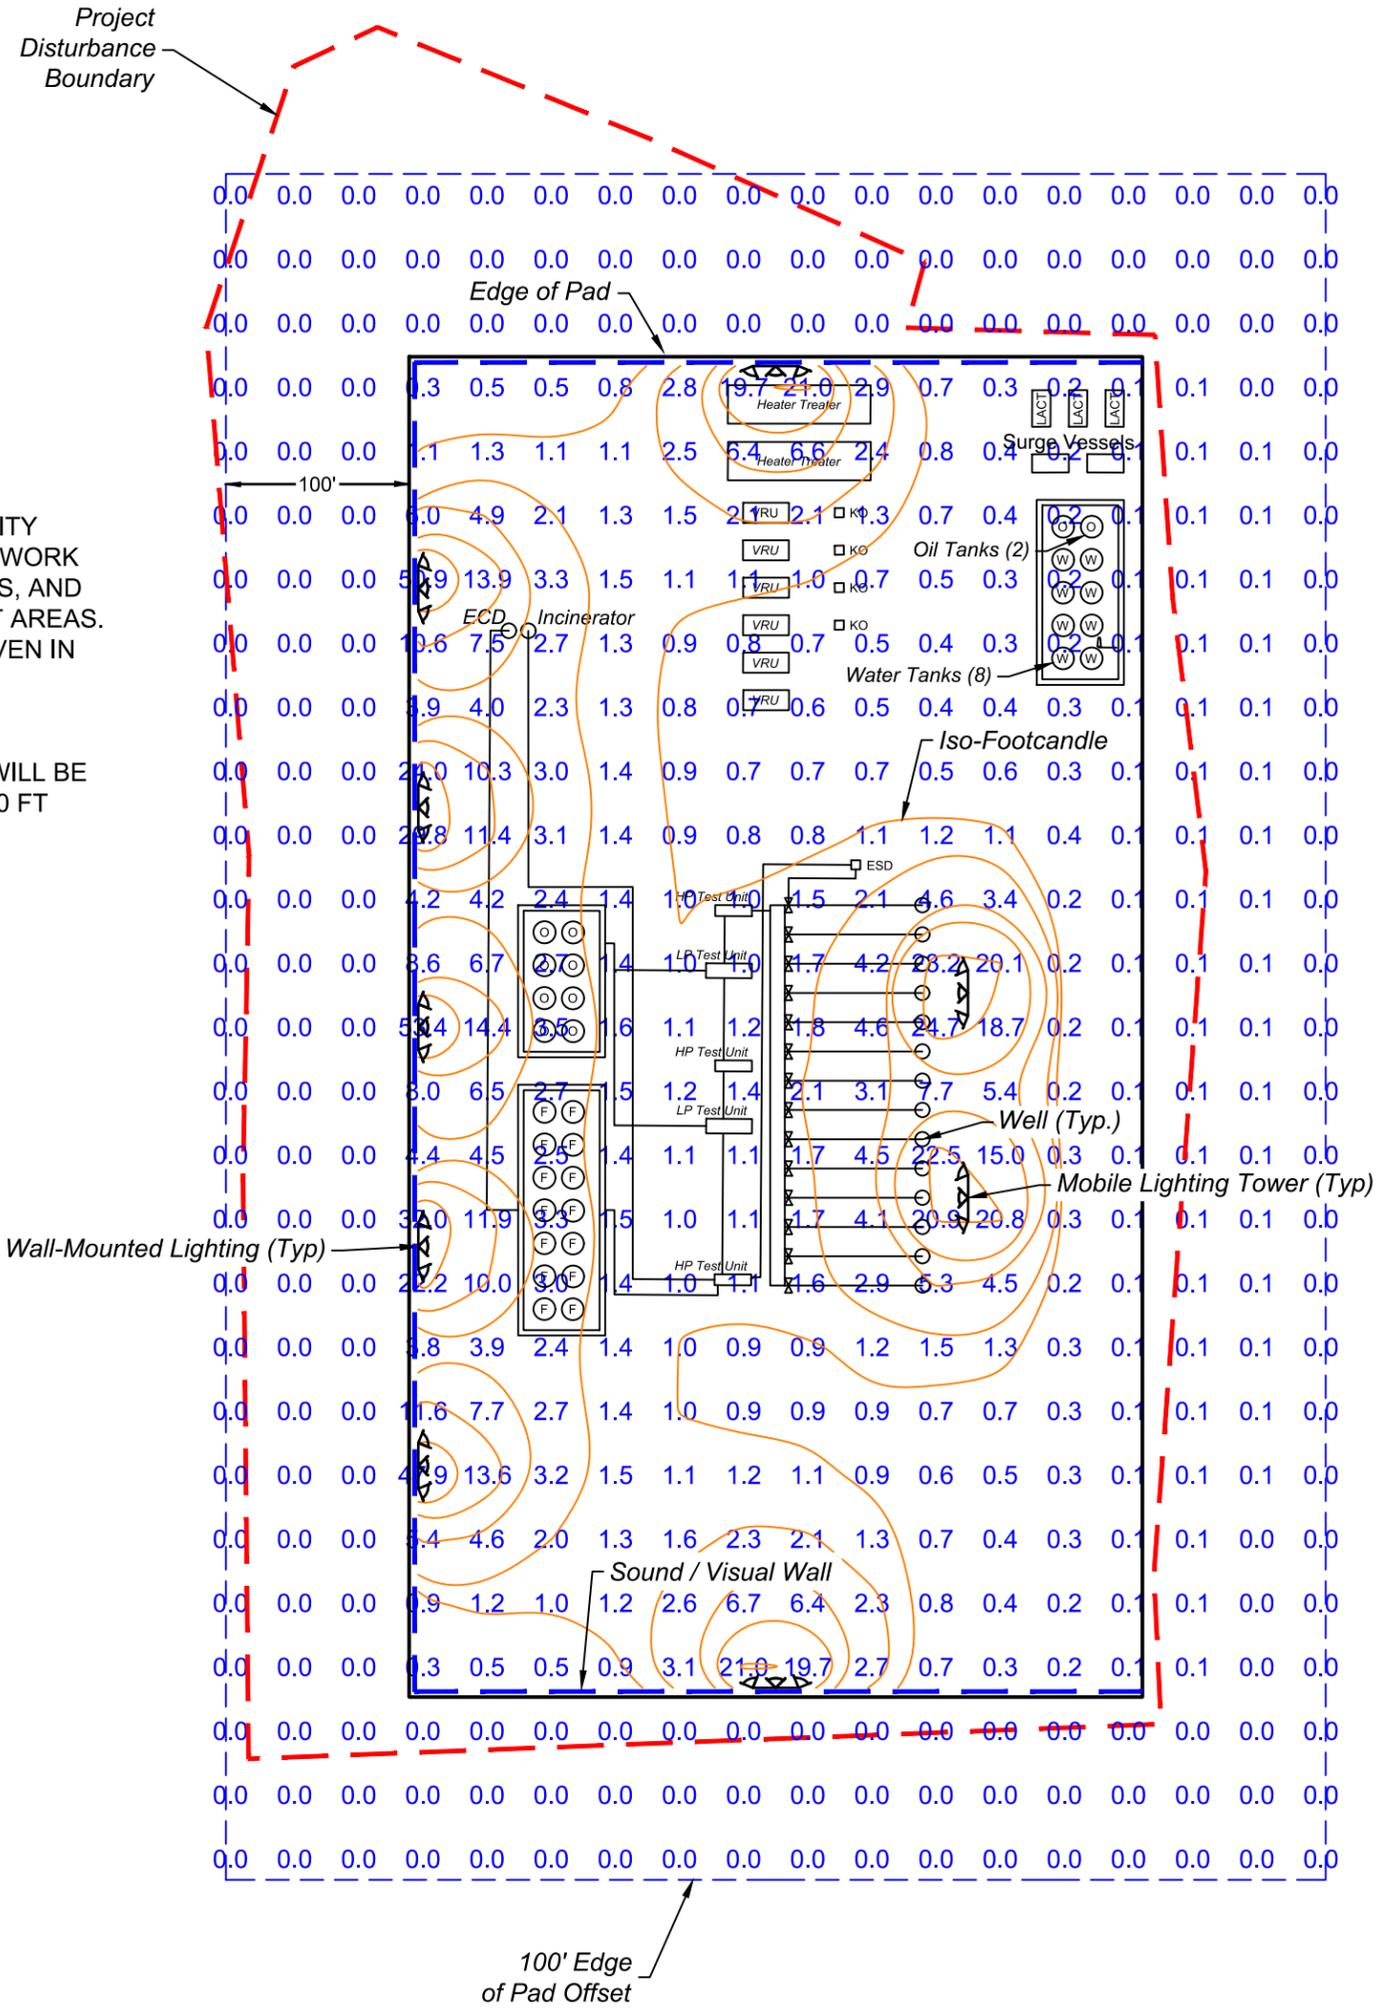

1 DRILL-OUT PAD SITE LIGHTING PHOTOMETRIC PLAN
 SCALE: 1" = 100'

LIGHTING FIXTURE SCHEDULE									
SYMBOL	LIGHT UNIT DESCRIPTION	BUG RATING	MOUNTING INFO	VOLTS	LAMP QUANTITY	LUMENS / LAMP	UNITS QUANTITY	LUMENS / UNIT	TOTAL LUMENS
	3 HEAD LED FLOOD LIGHTS, MOBILE TELESCOPING TOWER	B3-U3-G5	25' TOWER/ 25' WALL	120	3	45,171	2	135,513	271,026
	3 HEAD LED FLOOD LIGHTS, WALL MOUNT	B3-U3-G5	25' WALL	120	3	45,171	7	135,513	948,591

VERDAD RESOURCES LLC

FAWN 2734-2833 PAD
 S 1/2, SECTION 22, T1N, R65W, 6th P.M.
 WELD COUNTY, COLORADO



UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017


SCALE: AS NOTED	DRAWN BY: C.C.	DATE DRAWN: 02-18-22
UELS FILE NO.: V - 179		REVISED: 03-21-22 C.C.

DRILL-OUT OPERATIONS PHOTOMETRIC PLAN


CERTIFICATE
 THIS ALSO CERTIFIES THAT I HAVE
 RELATIVE EXPERIENCE IN LIGHT
 MITIGATION TECHNIQUES AND DESIGN.



1" = 100'

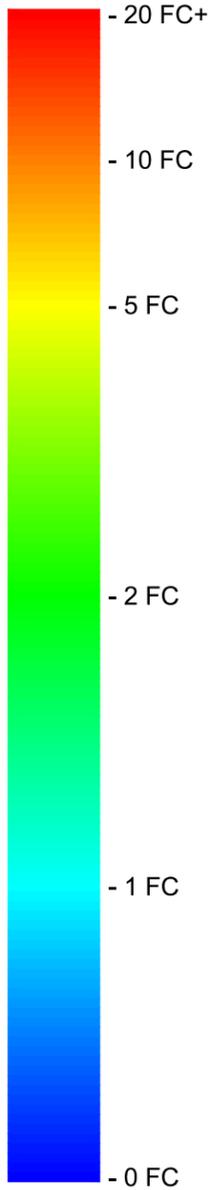

Project
Disturbance
Boundary

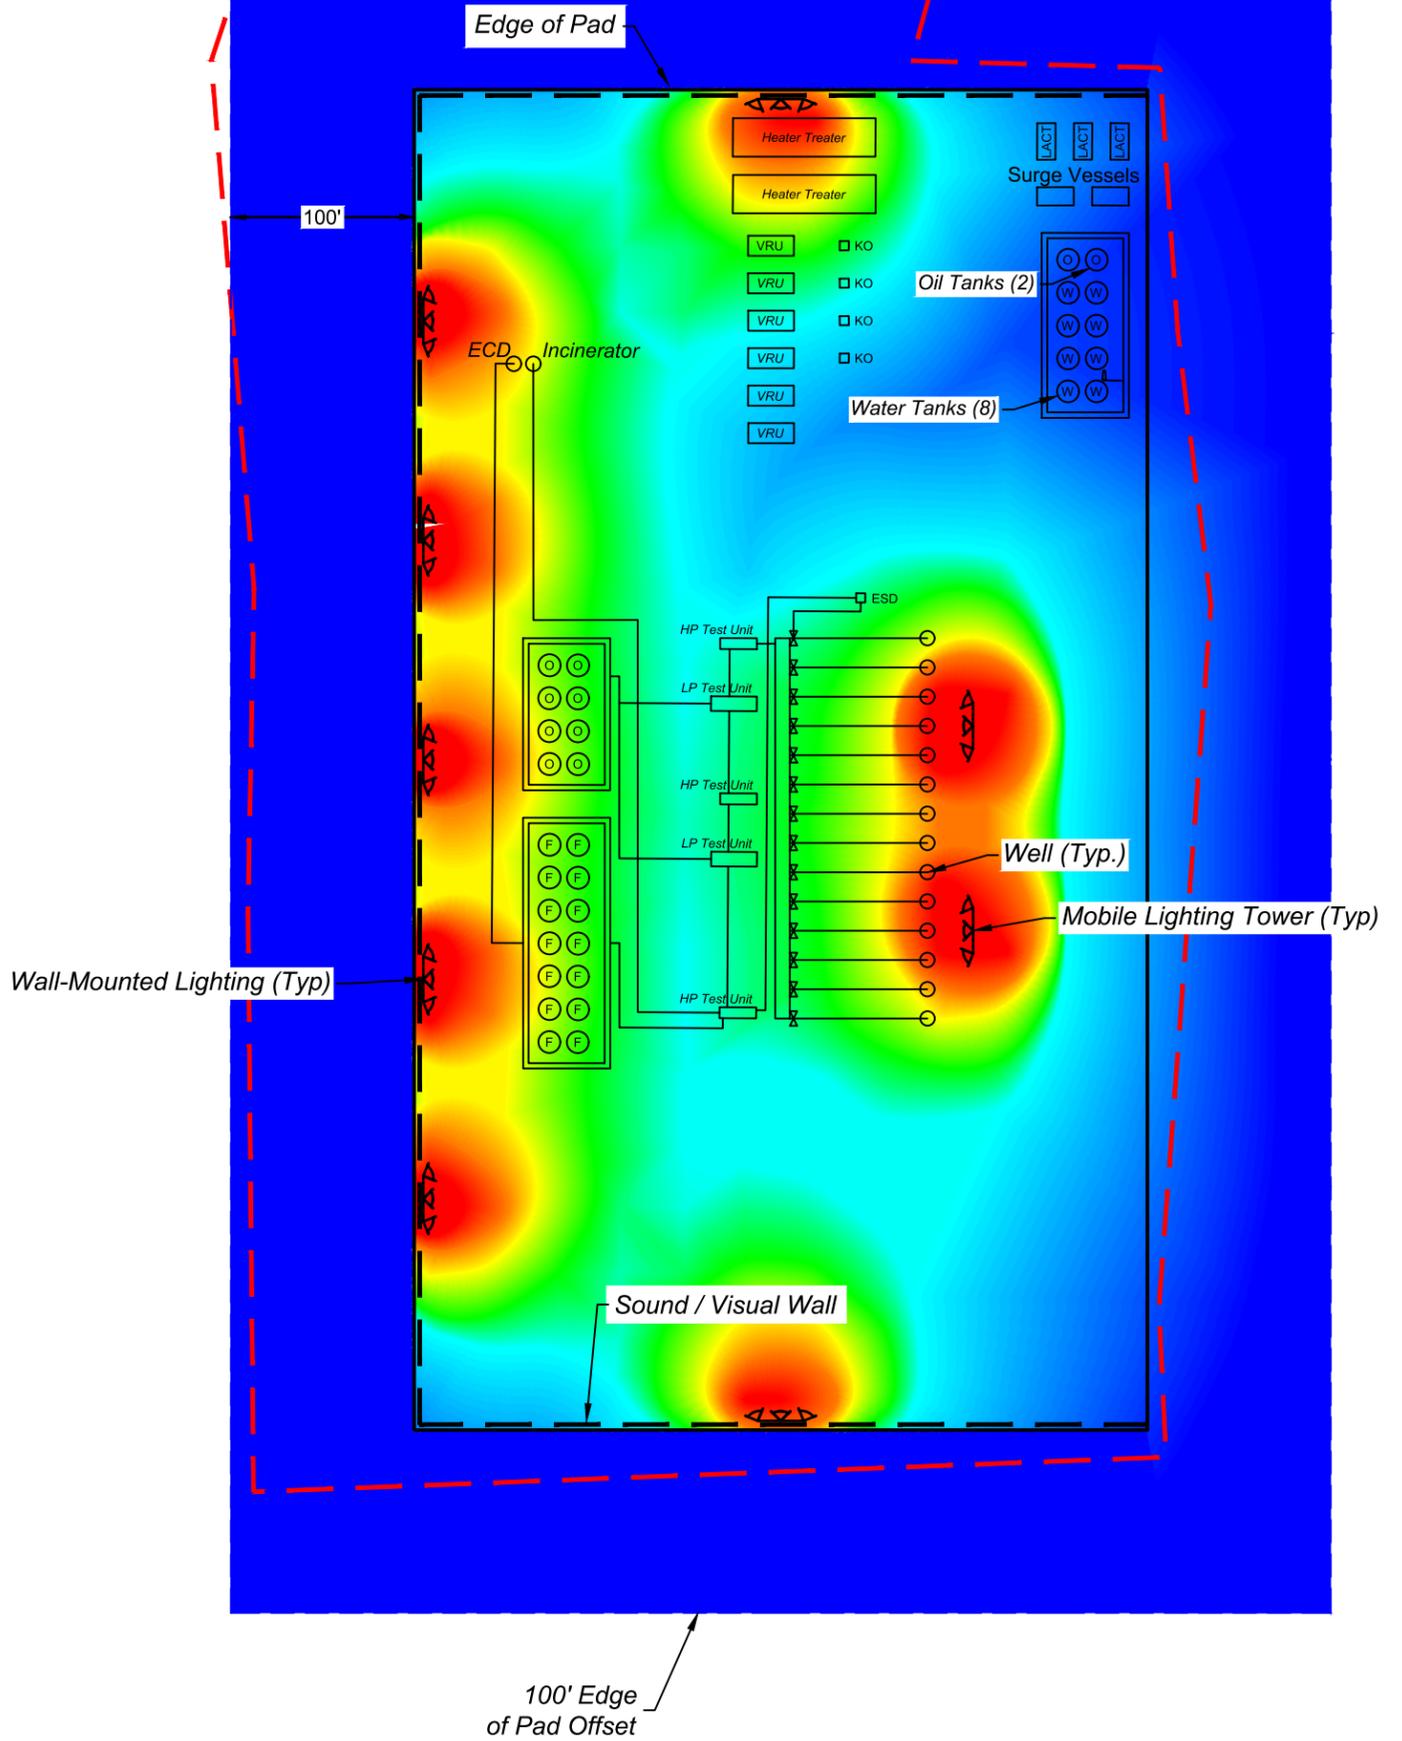

1 DRILL-OUT PAD SITE LIGHTING PHOTOMETRIC PLAN
 SCALE: 1" = 100'

LIGHTING FIXTURE SCHEDULE									
SYMBOL	LIGHT UNIT DESCRIPTION	BUG RATING	MOUNTING INFO	VOLTS	LAMP QUANTITY	LUMENS / LAMP	UNITS QUANTITY	LUMENS / UNIT	TOTAL LUMENS
	3 HEAD LED FLOOD LIGHTS, MOBILE TELESCOPING TOWER	B3-U3-G5	25' TOWER/ 25' WALL	120	3	45,171	2	135,513	271,026
	3 HEAD LED FLOOD LIGHTS, WALL MOUNT	B3-U3-G5	25' WALL	120	3	45,171	7	135,513	948,591

VERDAD RESOURCES LLC

FAWN 2734-2833 PAD
S 1/2, SECTION 22, T1N, R65W, 6th P.M.
WELD COUNTY, COLORADO




UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017

SCALE: AS NOTED	DRAWN BY: C.C.	DATE DRAWN: 02-18-22
UELS FILE NO.: V - 1 7 9	REVISED: 03-21-22 C.C.	


DRILL-OUT OPERATIONS HEAT MAP

CERTIFICATE
 THIS ALSO CERTIFIES THAT I HAVE
 RELATIVE EXPERIENCE IN LIGHT
 MITIGATION TECHNIQUES AND DESIGN.



NOTES:

1. MEASURED LIGHT INTENSITY LEVEL WITH RESPECT TO WORK AREAS, OUTDOOR SPACES, AND UNATTENDED EQUIPMENT AREAS. ILLUMINANCE UNITS IS GIVEN IN Fc [1 fc = 10.8 Lux].
2. DIRECT LIGHTING FROM FLOWBACK OPERATIONS WILL BE CONFINED WITHIN THE 100 FT EDGE OF PAD OFF-SET BOUNDARY.
3. TOTAL PAD AREA = ± 6.73 ACRES, 293,200 Sq. Ft.
4. 1,219,617 TOTAL LUMENS. 4.160 LUMENS/SQ. FT.

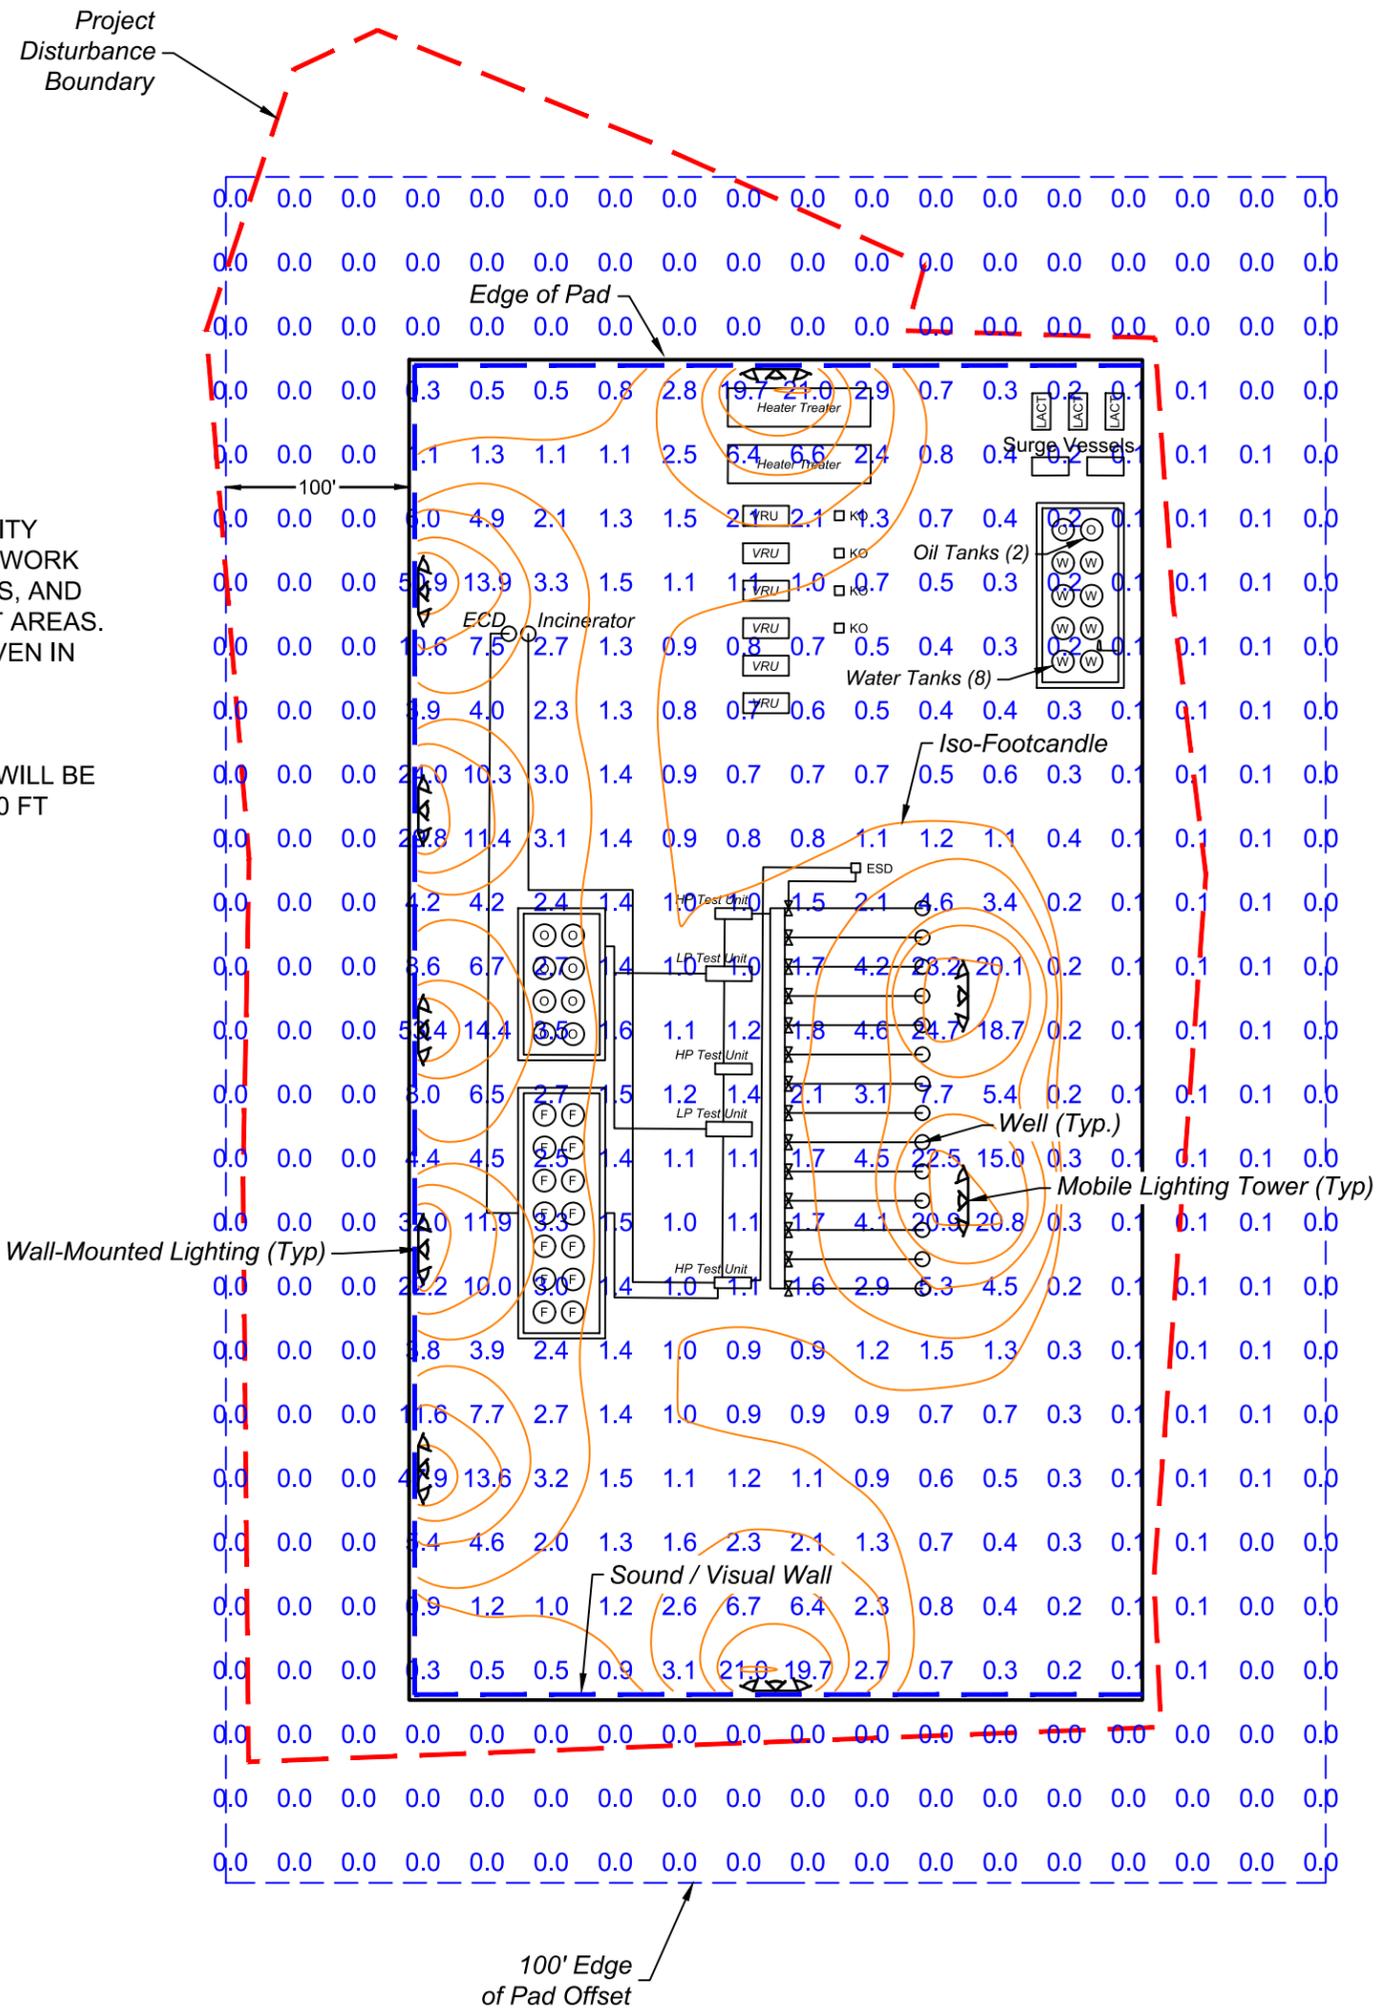

1 DRILL-OUT PAD SITE LIGHTING PHOTOMETRIC PLAN
 SCALE: 1" = 100'

LIGHTING FIXTURE SCHEDULE									
SYMBOL	LIGHT UNIT DESCRIPTION	BUG RATING	MOUNTING INFO	VOLTS	LAMP QUANTITY	LUMENS / LAMP	UNITS QUANTITY	LUMENS / UNIT	TOTAL LUMENS
	3 HEAD LED FLOOD LIGHTS, MOBILE TELESCOPING TOWER	B3-U3-G5	25' TOWER/ 25' WALL	120	3	45,171	2	135,513	271,026
	3 HEAD LED FLOOD LIGHTS, WALL MOUNT	B3-U3-G5	25' WALL	120	3	45,171	7	135,513	948,591

VERDAD RESOURCES LLC

FAWN 2734-2833 PAD
 S 1/2, SECTION 22, T1N, R65W, 6th P.M.
 WELD COUNTY, COLORADO



UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017


SCALE: AS NOTED	DRAWN BY: C.C.	DATE DRAWN: 02-18-22
UELS FILE NO.: V - 179	REVISED: 03-21-22 C.C.	

FLOWBACK OPERATIONS PHOTOMETRIC PLAN


CERTIFICATE
 THIS ALSO CERTIFIES THAT I HAVE
 RELATIVE EXPERIENCE IN LIGHT
 MITIGATION TECHNIQUES AND DESIGN.



1" = 100'

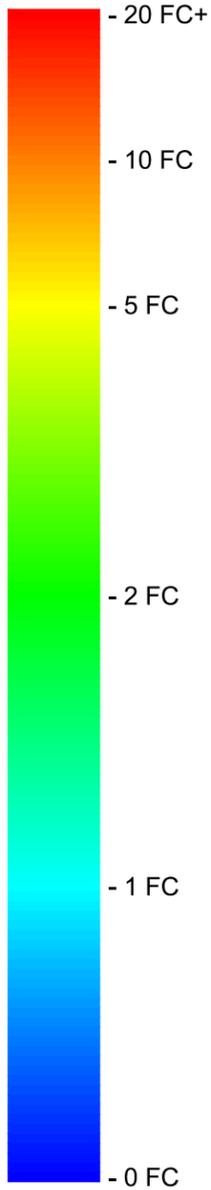

Project
Disturbance
Boundary

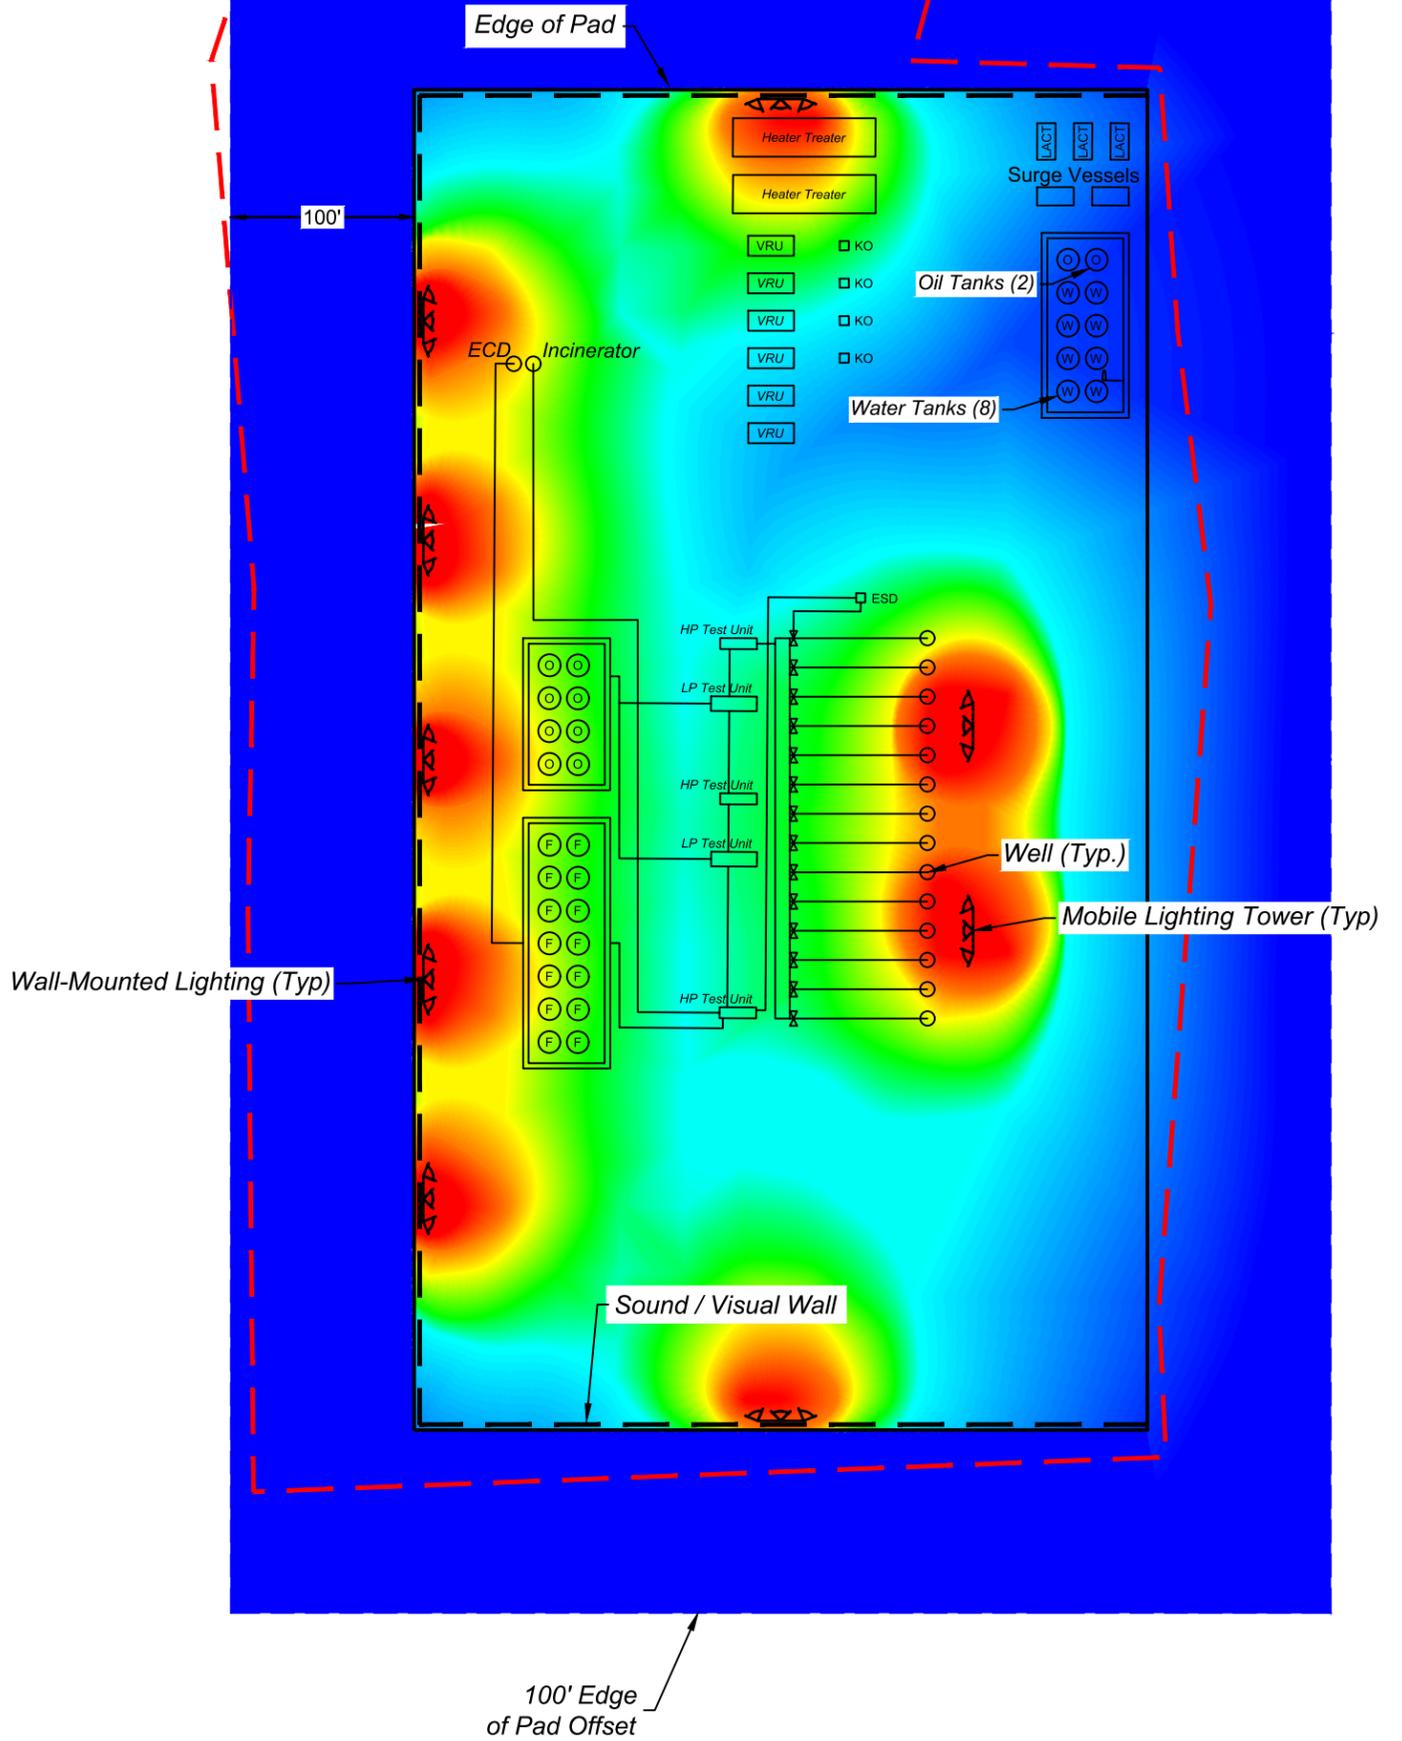

1 DRILL-OUT PAD SITE LIGHTING PHOTOMETRIC PLAN
 SCALE: 1" = 100'

LIGHTING FIXTURE SCHEDULE									
SYMBOL	LIGHT UNIT DESCRIPTION	BUG RATING	MOUNTING INFO	VOLTS	LAMP QUANTITY	LUMENS / LAMP	UNITS QUANTITY	LUMENS / UNIT	TOTAL LUMENS
	3 HEAD LED FLOOD LIGHTS, MOBILE TELESCOPING TOWER	B3-U3-G5	25' TOWER/ 25' WALL	120	3	45,171	2	135,513	271,026
	3 HEAD LED FLOOD LIGHTS, WALL MOUNT	B3-U3-G5	25' WALL	120	3	45,171	7	135,513	948,591

VERDAD RESOURCES LLC

FAWN 2734-2833 PAD
 S 1/2, SECTION 22, T1N, R65W, 6th P.M.
 WELD COUNTY, COLORADO



UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017

SCALE: AS NOTED	DRAWN BY: C.C.	DATE DRAWN: 02-18-22
UELS FILE NO.: V - 1 7 9	REVISED: 03-21-22 C.C.	

FLOWBACK OPERATIONS HEAT MAP



Ultra high output, high efficiency LED floodlight with NEMA Types: 7H x 6V, 6H x 4V, 4H x 6V, 5H x 5V and 3H x 3V. patent-pending "Air-Flow" technology ensures long LED and driver lifespan. Use for general and security lighting for large areas, building façades, signs and landscapes.

Color: Bronze

Weight: 66.1 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	2.65A
208V	1.59A
240V	1.38A
277V	1.17A
Input Watts	325.9W

LED Info

Watts	300W
Color Temp	5000K (Cool)
Color Accuracy	72 CRI
L70 Lifespan	100,000 Hours
Lumens	45,171
Efficacy	138.6 lm/W

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations. Suitable for ground mounting.

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

Optical

NEMA Type:

NEMA Beam Spread of 7H x 6V

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Construction

IP Rating:

Ingress Protection rating of IP66 for dust and water

Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

Effective Projected Area:

EPA = 4

Cold Weather Starting:

Minimum starting temperature is -40°C (-40°F)

Thermal Management:

Superior thermal management with external "Air-Flow" fins

Lens:

Tempered glass lens

Housing:

Die-cast aluminum housing and door frame

Mounting:

Heavy-duty slipfitter for 2 3/8"OD pipe

Reflector:

Specular and semi-specular vacuum-metalized polycarbonate

Gaskets:

High-temperature silicone gaskets

Technical Specifications (continued)

Construction

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

Tilt Increment:

Rotates in 6 degree increments

LED Characteristics

LEDs:

Multip-chip, high-output, long-life LEDs

Color Consistency:

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Electrical

Drivers:

Constant Current, 1050mA, 50/60 Hz, 120-277V, 4 kV surge protection, 120V: 2.65A, 208V: 1.59A, 240V: 1.38A, 277V: 1.17A, THD <20%, Power Factor: 99%

THD:

9.26% at 120V, 12.56% at 277V

Power Factor:

99.3% at 120V, 96.6% at 277V

Note:

All values are typical (tolerance +/- 10%)

Other

Equivalency:

Equivalent to 1000W Metal Halide

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:


RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Listings

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. DLC Product Code: PF5PMFXJ

Dimensions

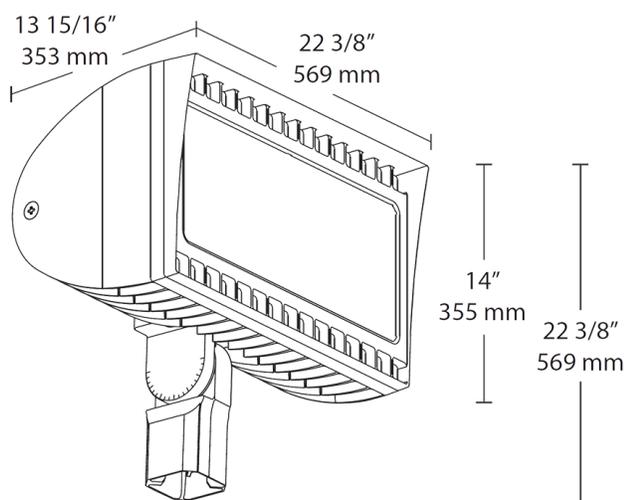

Features

- 300W replaces 1000 MH floodlights
- 100,000-hour LED lifespan
- 5-Year, No-Compromise Warranty

Ordering Matrix

Family	Wattage	Mounting	Color Temp	NEMA Type	Finish	Driver Options	Options	Other Options
FXLED	300	SF						
	200 = 200W 300 = 300W	SF = Slipfitter T = Trunnion	Blank = 5000K (Cool) N = 4000K (Neutral) Y = 3000K (Warm)	Blank = 7H x 6V B64 = 6H x 4V B55 = 5H x 5V B33 = 3H x 3V B46 = 4H x 6V	Blank = Bronze W = White	Blank = 120-277V /480 = 480V /BL = Bi-Level (Slipfitters only) ¹ /D10 = 0-10V Dimming	Blank = No option /PCS = 120V Swivel /PCS2 = 277V Swivel /PCT = 120-277V Twistlock /PCT4 = 480V Twistlock /PCS4 = 480V Swivel /LC = Lightcloud® Controller	USA = BAA Compliant Blank = Standard

¹ Slipfitter models only



IES ROAD REPORT
PHOTOMETRIC FILENAME : RABFXLED300SF_30D.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] DLF20180512001-1a
 [TESTLAB] Deliver Co. Ltd.
 [MANUFAC] RAB LIGHTING INC. RC LIGHTING
 [ISSUEDATE] 05/12/18
 [_CONVERT] Luminaire test position and photometric web converted from original test data


CHARACTERISTICS

IES Classification	Type IV
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	45134
Downward Total Efficiency	N.A. (absolute)
Total Luminaire Efficiency	N.A. (absolute)
Luminaire Efficacy Rating (LER)	138
Total Luminaire Watts	325.921
Ballast Factor	1.00
Upward Waste Light Ratio	0.01
Maximum Candela	27222.949
Maximum Candela Angle	360H 47.5V
Maximum Candela (<90 Degrees Vertical)	27222.949
Maximum Candela Angle (<90 Degrees Vertical)	360H 47.5V
Maximum Candela At 90 Degrees Vertical	3383.779 (7.5% Luminaire Lumens)
Maximum Candela from 80 to <90 Degrees Vertical	7519.438 (16.7% Luminaire Lumens)
Cutoff Classification (deprecated)	N.A. (absolute)

LUMINAIRE CLASSIFICATION SYSTEM (LCS)


	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	7859.9	N.A.	17.4
FM - Front-Medium (30-60)	21395.0	N.A.	47.4
FH - Front-High (60-80)	10409.2	N.A.	23.1
FVH - Front-Very High (80-90)	1598.0	N.A.	3.5
BL - Back-Low (0-30)	2114.1	N.A.	4.7
BM - Back-Medium (30-60)	1264.3	N.A.	2.8
BH - Back-High (60-80)	112.0	N.A.	0.2
BVH - Back-Very High (80-90)	3.2	N.A.	0.0
UL - Uplight-Low (90-100)	305.4	N.A.	0.7
UH - Uplight-High (100-180)	72.5	N.A.	0.2
Total	45133.6	N.A.	100.0
BUG Rating	B3-U3-G5		

POLAR GRAPH

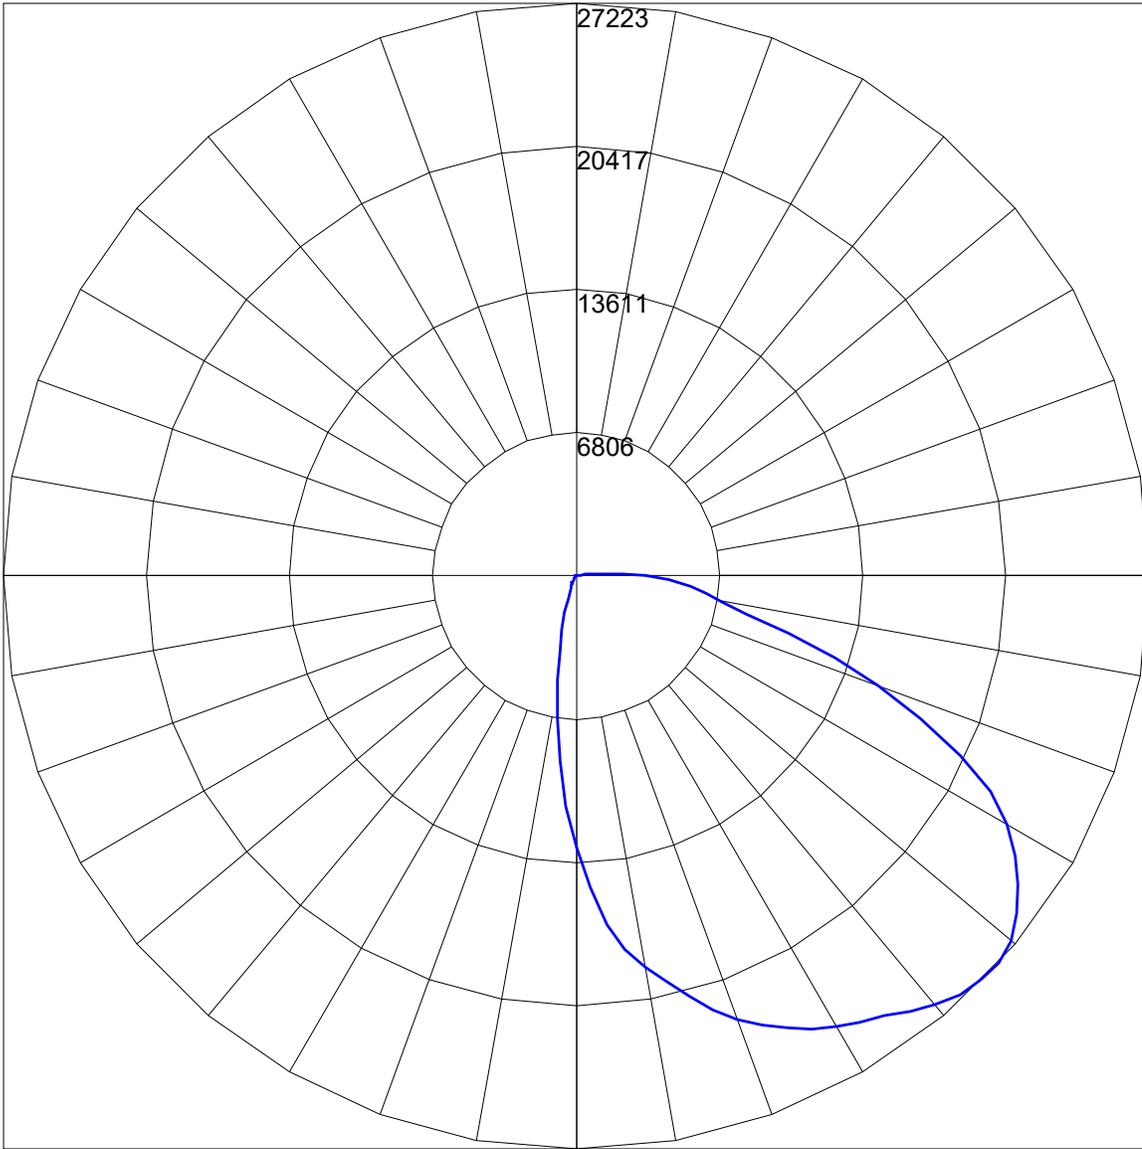


Maximum Candela = 27222.949 Located At Horizontal Angle = 360, Vertical Angle = 47.5
Vertical Plane Through Horizontal Angles (360 - 180) (Through Max. Cd.)

POLAR GRAPH

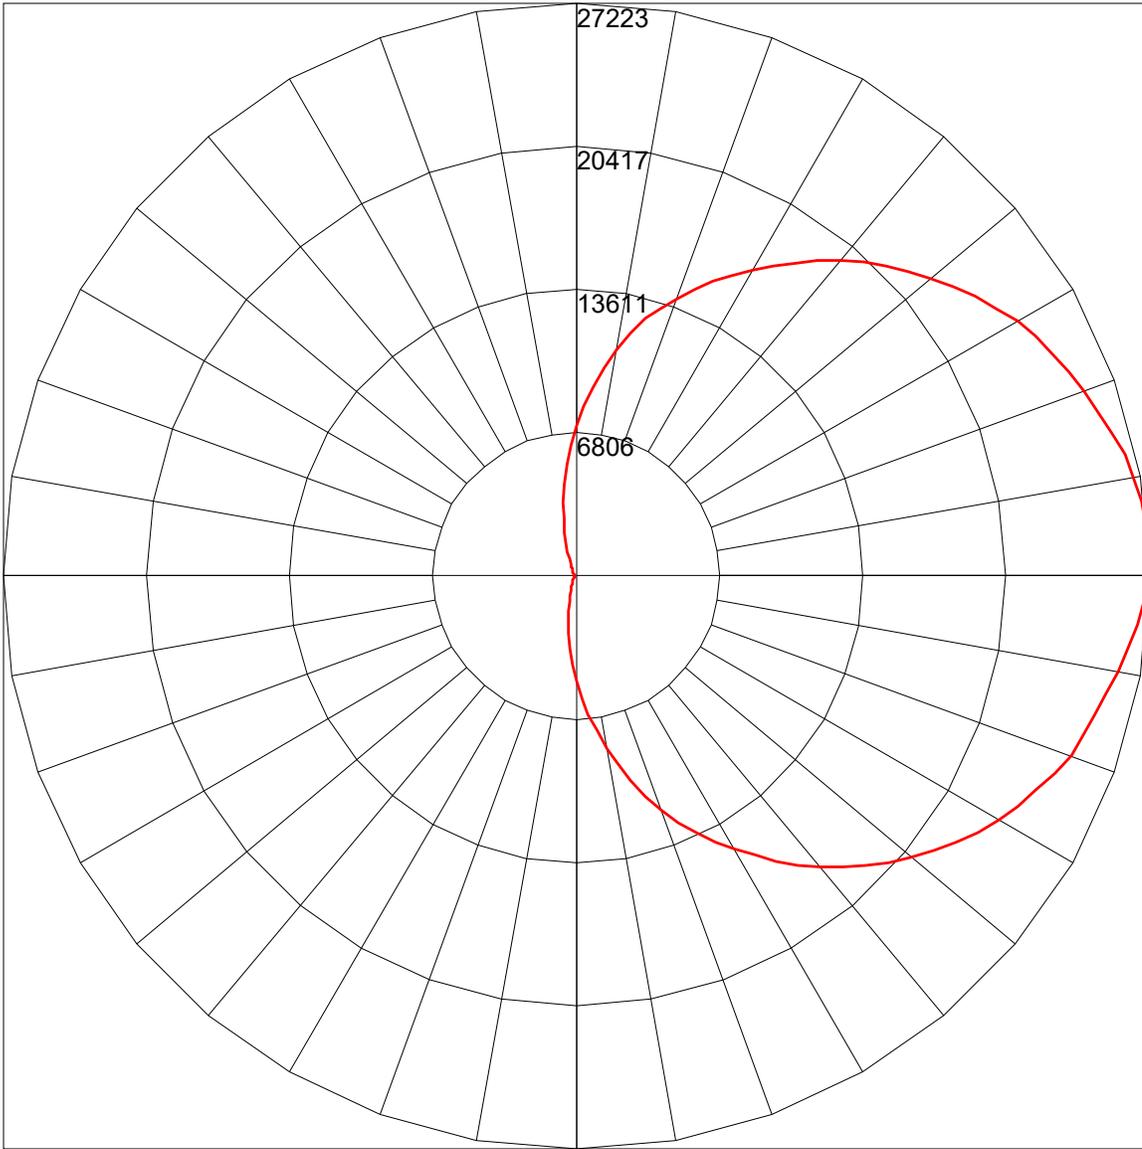


Maximum Candela = 27222.949 Located At Horizontal Angle = 360, Vertical Angle = 47.5
Horizontal Cone Through Vertical Angle (47.5) (Through Max. Cd.)

ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

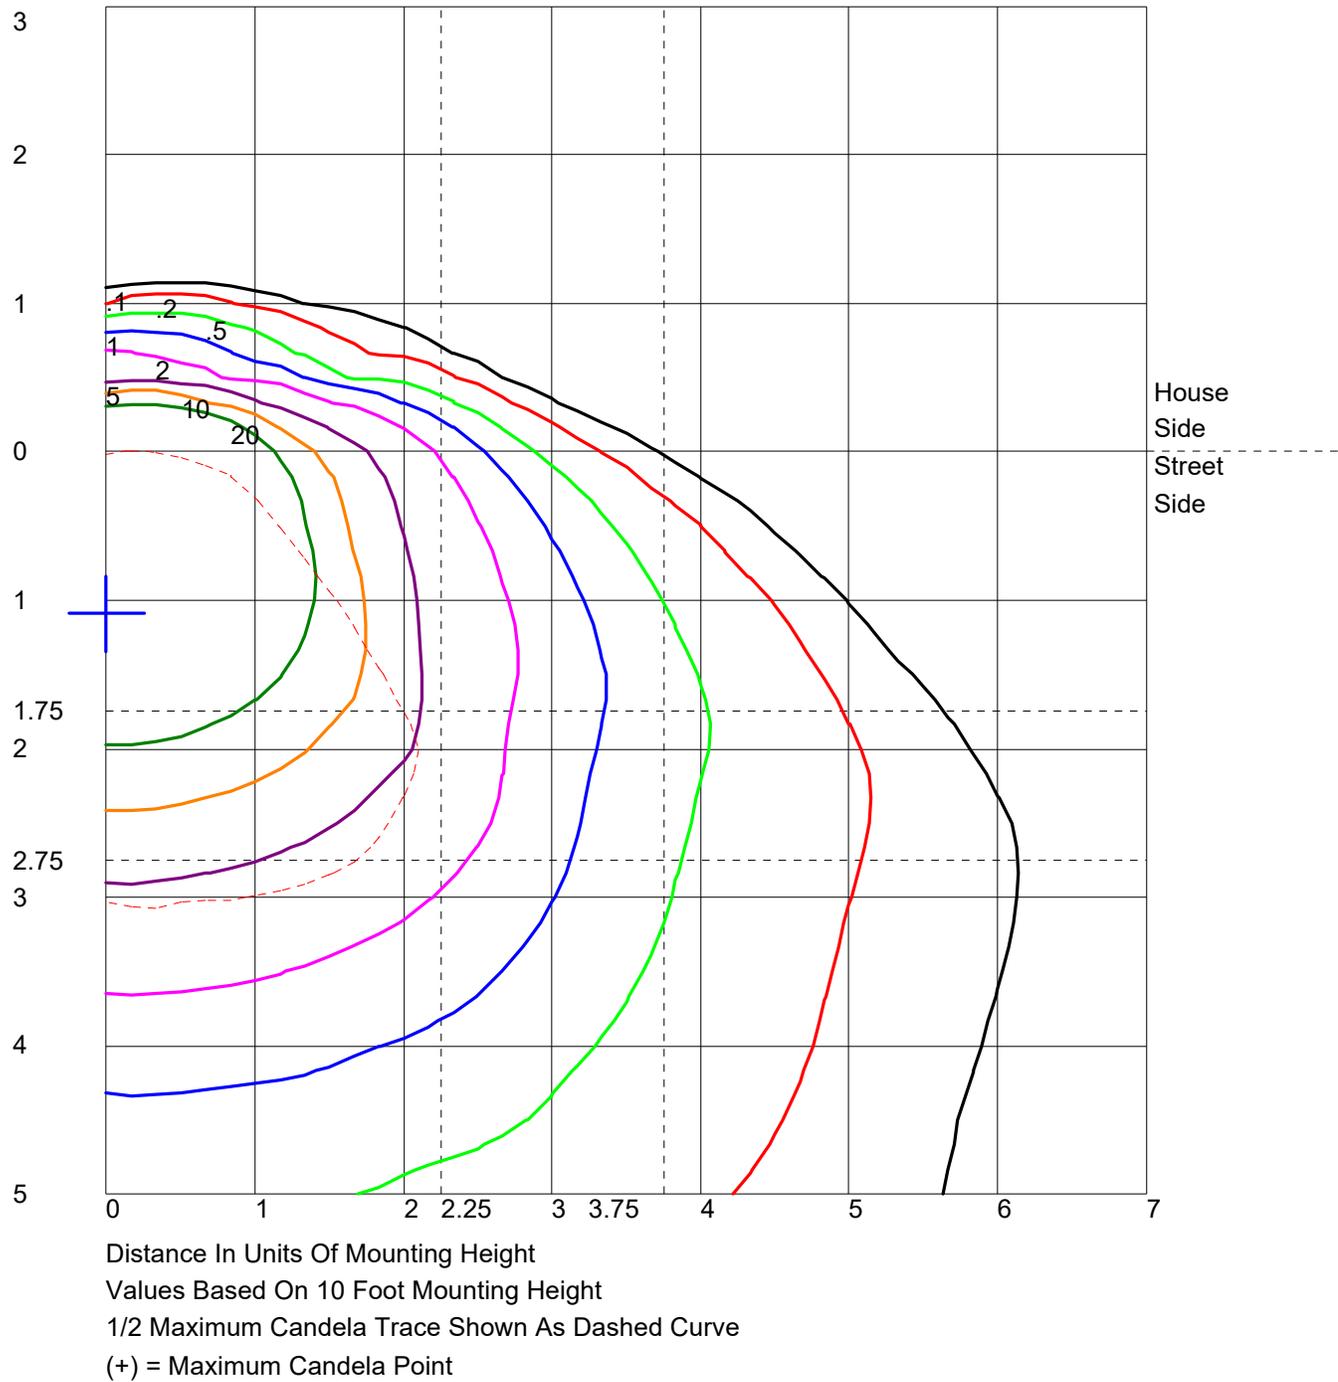

LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH

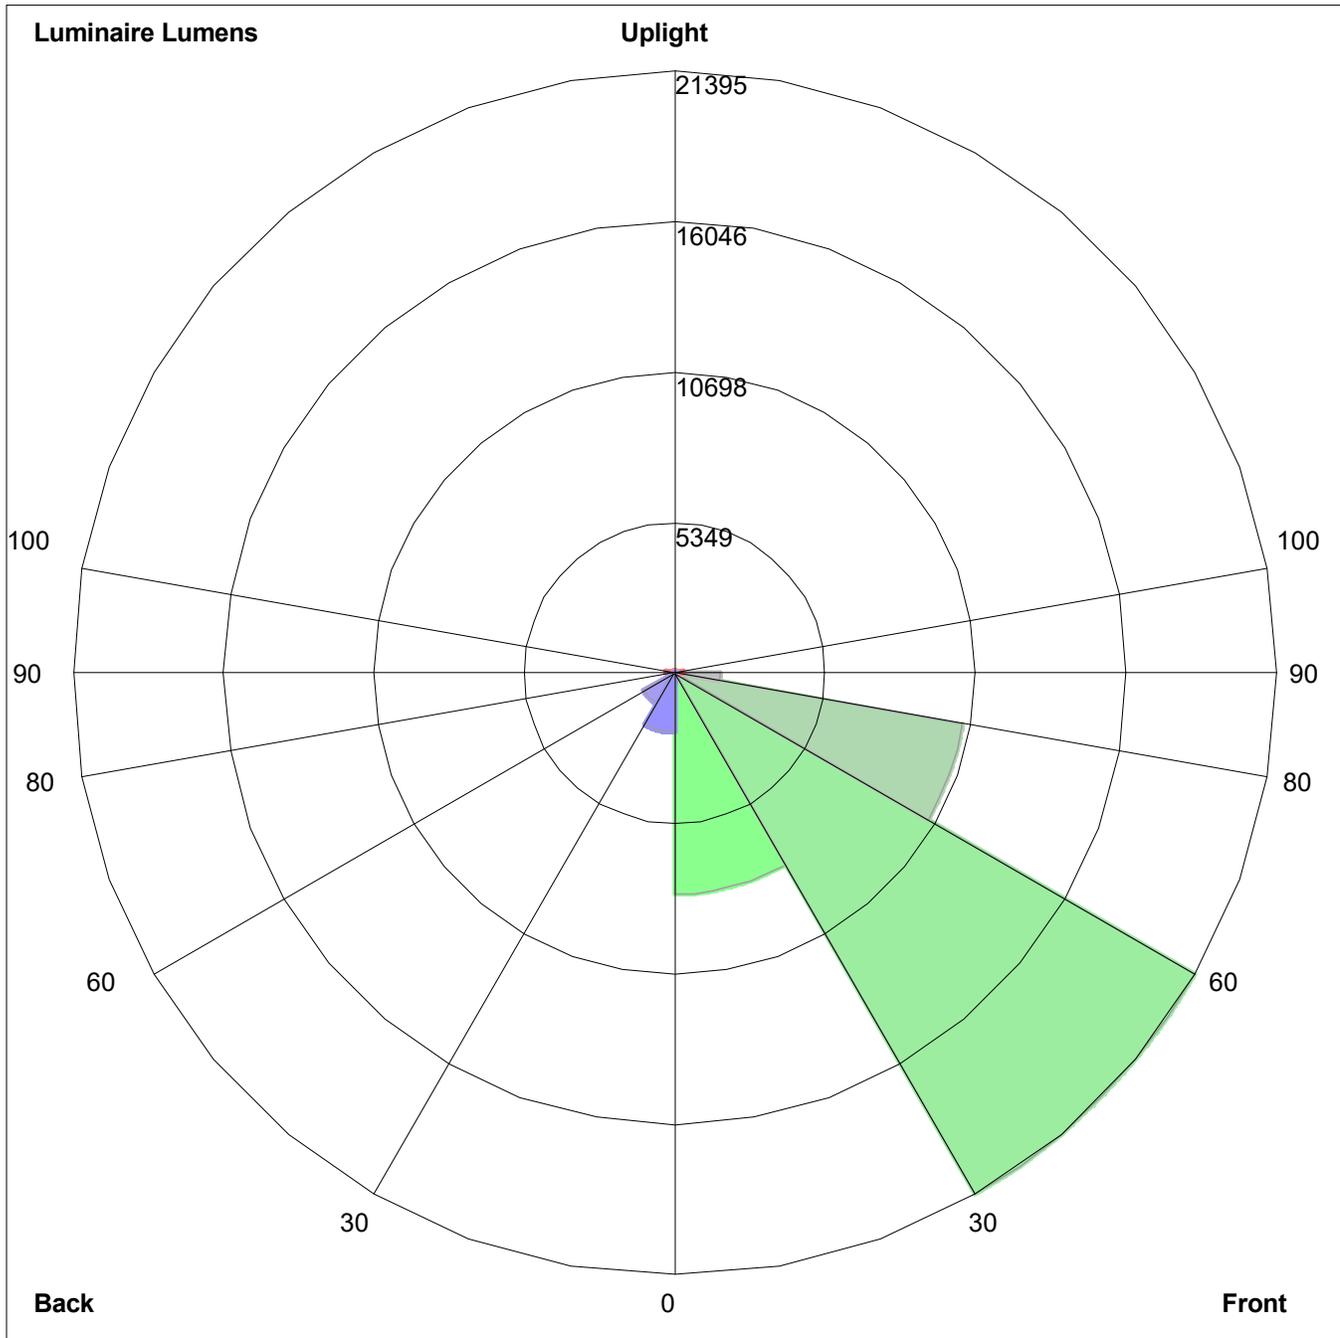

Luminaire Lumens:
Front: Low=7859.9, Medium= 21395.0, High=10409.2, Very High= 1598.0
Back: Low=2114.1, Medium=1264.3, High=112.0, Very High=3.2
Uplight: Low=305.4, High=72.5

BUG Rating : B3-U3-G5



HiLight V4 S

HiLight V5+ S

The HiLight V4 S and V5+ S light towers are perfect for multiple applications. For the ultimate in fuel economy and reliability, the LED HiLight V5+ is our premium offering. Its LED lighting technology provides a wide range of benefits and represents outstanding lifetime value for our customers. The second model, the HiLight V4 is the leading solution within the 4000W metal halide light tower segment. Both models offer assured robustness and extended safety features.



LED
4 x 350 W

LIGHT
COVERAGE
43,055 ft²
AVG. 20LUXES

LIFE SPAN
6,000 Hrs
METAL HALIDE

0.56 g/h



Manual vertical mast

HardHat[®] technology

Spillage free frame

LIGHT
COVERAGE
53,819 ft²
AVG. 20LUXES

LIFE SPAN
50,000 Hrs
LED

0.185 g/h

		BATTERY	DIESEL				ELECTRIC		
		HiLight Z3+	HiLight B5+	HiLight V5+ S	HiLight V4 S	HiLight V4W	HiLight E3+	HiLight P2+	HiLight V2+ V3+
Light coverage ft ²		32,292 (average 10 luxes)	53,819 (average 20 luxes)	53,819 (average 20 luxes)	43,055 (average 20 luxes)	43,055 (average 20 luxes)	32,292 (average 10 luxes)	21,527 (average 10 luxes)	21,527 (average 10 luxes)
Lamps		LED	LED	LED	Metal halide	Metal halide	LED	LED	LED
Mast		Vertical Hydraulic Battery Powered Noise & CO2 free	Vertical Hydraulic	Vertical manual	Vertical manual	Vertical manual	Vertical manual	Vertical manual	Vertical manual
Features			Compact box	HardHat® canopy	HardHat® canopy	HardHat® canopy	Electric	Electric	Electric
Performance data									
Rated frequency	Hz	60	60	60	60	60	60	60	60
Rated voltage	VAC	120	120	120	120	120-240	120	120	120
Rated power (PRP)	kW	-	2.7	2.7	6.8	8	-	-	-
Operating temperature (min/max)	°F (°C)	-4/ 122 (-20/ 50)	-4/ 104 (-20/ 40)	-13 / 122 (-25 / 50)	-13 / 122 (-25 / 50)	-13 / 122 (-25 / 50)	-	-	-
Sound power level (LwA)	dB(A)	-	82	86	94	89	-	-	-
Sound pressure level (LpA) at 7m	dB(A)	-	55	63	73	64	-	-	-
Engine									
Model		-	Kubota Z481	Kubota Z482	Kubota Z482	Kubota D1105	-	-	-
Speed	rpm	-	1800	1800	3600	1800	-	-	-
Rated net output (PRP)	kW	-	3	3	8.1	10	-	-	-
Coolant		-	Water	Water	Water	Water	-	-	-
Number of cylinders		-	1	2	2	3	-	-	-
Alternator									
Model		-	Meccalte LT3/74	Meccalte LT3/75	Sincro EK 2 MCT	DP06/AG164	-	-	-
Rated output	kVA	-	3.5	4.5	7.5	8	-	-	-
Insulation / Enclosure protection	class / IP	-	H / 20	H / 21	H / 23	H / 23	-	-	-
Fuel consumption									
Fuel tank capacity	gallon (l)	-	34.3 (230)	28 (105)	28 (105)	42 (160)	-	-	-
Autonomy	h	18-32	220	150	50	90	-	-	-
Power output									
Auxiliary Power	W	-	1,200	1,200	2,400	7,200	-	-	-
Outlets		-	120 VAC, 10A, GFCI Duplex (NEMA 5-20R)	120 VAC, 10A, GFCI Duplex (NEMA 5-20R)	120 VAC, 20A, GFCI Duplex (NEMA 5-20R)	121 VAC, 20A, GFCI Duplex (NEMA 5-20R) 240VAC, 30A, TL (NEMA L5-30R)	-	-	-
Lights									
Floodlights		LED	LED	LED	Metal halide	Metal halide	LED	LED	LED
Wattage	W	4x 160	4 x 350	4 x 350	4 x 1,000	4 x 1,000	4 x 160	320	320 4 x 120
Luminous Flux	Lumen	4 x 16,000	4 x 38,500	4 x 38,500	4 x 110,000	4 x 110,000	4 x 16,000	28,000	28,000 4 x 12,000
Mast									
Type		Hydraulic, vertical, 5 section	Hydraulic, vertical, 5 section	Manual vertical, 5 section	Manual vertical, 5 section	Manual vertical, 5 section	Manual	Manual	Manual
Rotation	degrees	340	340	360	360	360	0	0	0
Maximum height	ft (m)	26 (7.9)	26 (7.9)	25 (7.5)	25 (7.5)	25 (7.5)	23 (7)	11 (3.4)	17 (5)
Maximum speed wind	mph (kph)	50 (80)	50 (80)	51 (80)	51 (80)	59 (95)	52 (80)	32(50)	32 (50)
Enclosure and trailer									
Type		Box type Forklift pockets	Box type Forklift pockets	DOT US Compliant Unibody trailer with 4 point leveling system	DOT US Compliant Unibody trailer with 4 point leveling system	DOT US Compliant Unibody trailer with 4 point leveling system	-	-	Trailer with Bumpers in PE
Base Frame		-	Spillage free frame	Spillage free frame	Spillage free frame	Spillage free frame	-	-	-
Enclosure		Galvanneal Steel Canopy & Powder coating painting	Galvanneal Steel Canopy & Powder coating painting	Gull-wing Hard Hat Doors	Gull-wing Hard Hat Doors	Gull-wing Hard Hat Doors	Hard Hat Canopy	-	-
Dimensions and weight									
Dimensions in transport Up-right Towbar (L x W x H)	in (m)	-	-	77 x 48 x 102 (1.95 x 1.22 x 2.59)	77 x 48 x 102 (1.95 x 1.22 x 2.59)	74 x 53 x 98 (1.88 x 1.34 x 2.49)	-	-	-
Dimensions in transport Towed (L x W x H)	in (m)	46 x 46 x 97 (1.16x 1.16x 2.46)	46 x 46 x 97 (1.16x 1.16x 2.46)	110 x 48 x 102 (2.79 x 1.22 x 2.59)	110 x 48 x 102 (2.79 x 1.22 x 2.59)	110 x 53 x 98 (2.79 x 1.34 x 2.49)	48 x 32 x 84 (1.2 x 0.8 x 2.14)	19.7 x 19.7 x 87 (0.5 x 0.5 x 2.2)	45 x 335 x 79 (1.1 x 0.85 x 2)
Weight	lb (kg)	2160(980)	2160(980)	1,768 (802)	1,970 (894)	2,041 (926)	608 (276)	99 (45)	243 (110)



IES ROAD REPORT

PHOTOMETRIC FILENAME : 350W 38500 LUMEN LED_30D.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST]

[TESTLAB]

[TESTDATE]

[ISSUEDATE]

[OTHER]

[MANUFAC]

[LUMCAT] fl-350-85x135

[LUMINAIRE] fl-350-85x135

[LAMPCAT] LED

[LAMP] LED

[_CONVERT] Luminaire test position and photometric web converted from original test data

CHARACTERISTICS


IES Classification	Type IV
Longitudinal Classification	Medium
Lumens Per Lamp	37338 (1 lamp)
Total Lamp Lumens	37338
Luminaire Lumens	37345
Downward Total Efficiency	99 %
Total Luminaire Efficiency	100 %
Luminaire Efficacy Rating (LER)	97
Total Luminaire Watts	386
Ballast Factor	1.00
Upward Waste Light Ratio	0.01
Maximum Candela	26112.25
Maximum Candela Angle	67.5H 70V
Maximum Candela (<90 Degrees Vertical)	26112.25
Maximum Candela Angle (<90 Degrees Vertical)	67.5H 70V
Maximum Candela At 90 Degrees Vertical	1300.775 (3.5% Lamp Lumens)
Maximum Candela from 80 to <90 Degrees Vertical	12466.58 (33.4% Lamp Lumens)
Cutoff Classification (deprecated)	Non-Cutoff

IES ROAD REPORT
PHOTOMETRIC FILENAME : 350W 38500 LUMEN LED_30D.IES

LUMINAIRE CLASSIFICATION SYSTEM (LCS)

	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	2894.2	7.8	7.8
FM - Front-Medium (30-60)	13146.5	35.2	35.2
FH - Front-High (60-80)	15017.0	40.2	40.2
FVH - Front-Very High (80-90)	866.9	2.3	2.3
BL - Back-Low (0-30)	1604.2	4.3	4.3
BM - Back-Medium (30-60)	2657.2	7.1	7.1
BH - Back-High (60-80)	606.9	1.6	1.6
BVH - Back-Very High (80-90)	18.3	0.0	0.0
UL - Uplight-Low (90-100)	353.2	0.9	0.9
UH - Uplight-High (100-180)	180.1	0.5	0.5
Total	37344.5	99.9	100.0
BUG Rating	B3-U3-G5		


COEFFICIENTS OF UTILIZATION

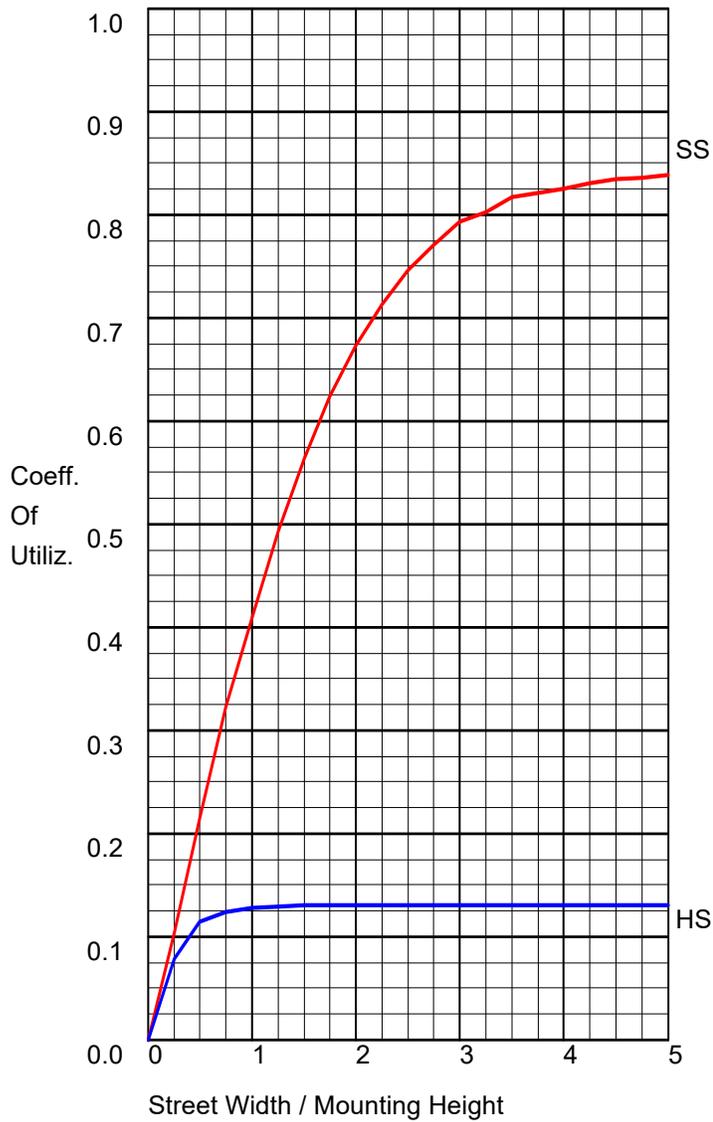

FLUX DISTRIBUTION


	Lumens	Percent Of Lamp
Downward Street Side	31924.7	85.5
Downward House Side	4886.6	13.1
Downward Total	36811.3	98.6
Upward Street Side	533.0	1.4
Upward House Side	0.3	0.0
Upward Total	533.3	1.4
Total Flux	37344.6	100.0

POLAR GRAPH

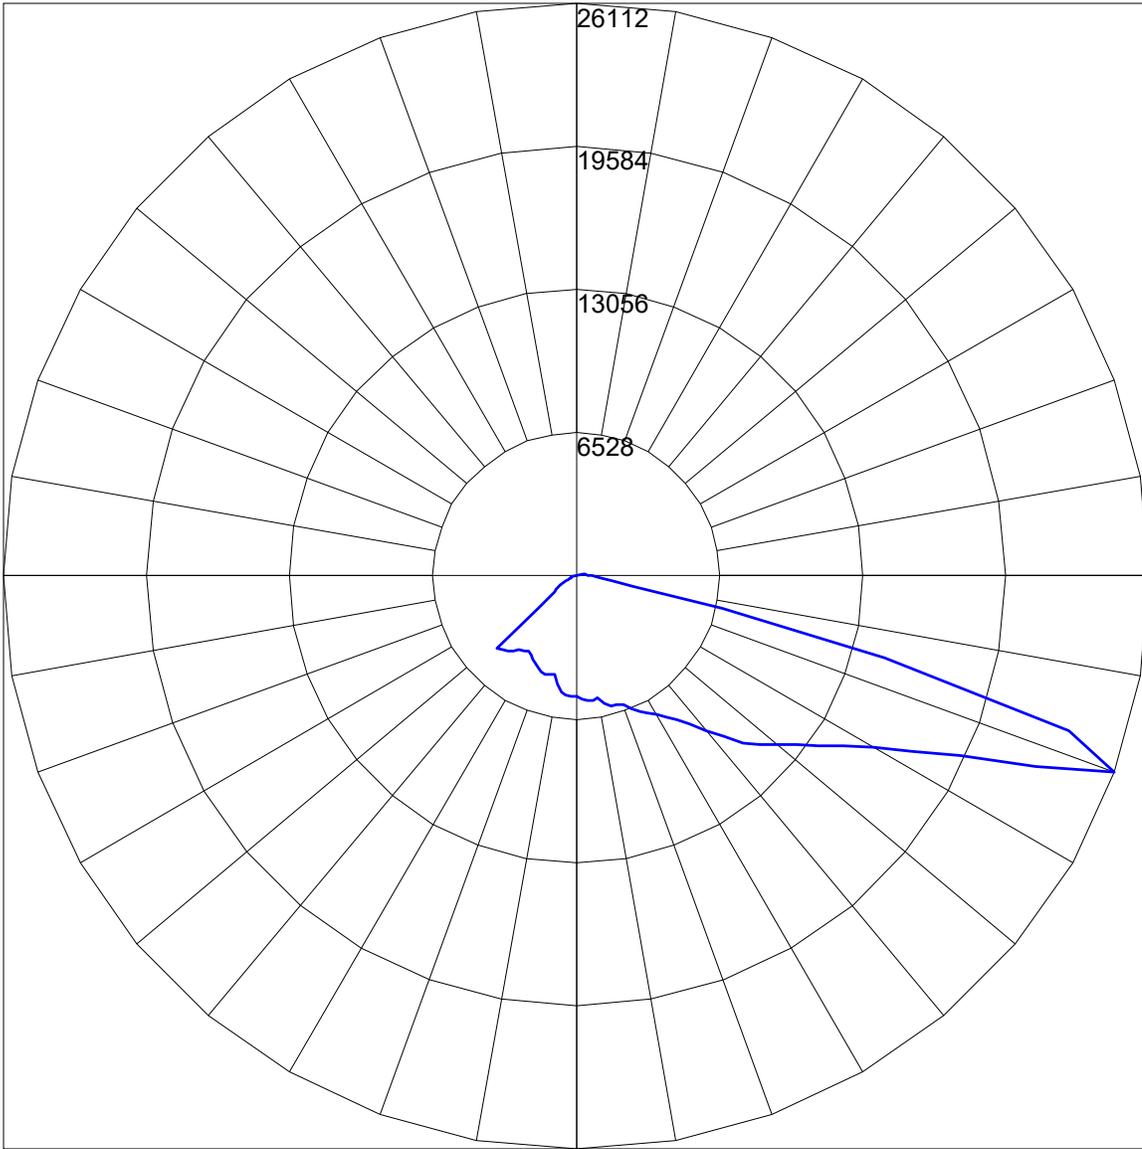


Maximum Candela = 26112.25 Located At Horizontal Angle = 67.5, Vertical Angle = 70
Vertical Plane Through Horizontal Angles (67.5 - 247.5) (Through Max. Cd.)

POLAR GRAPH

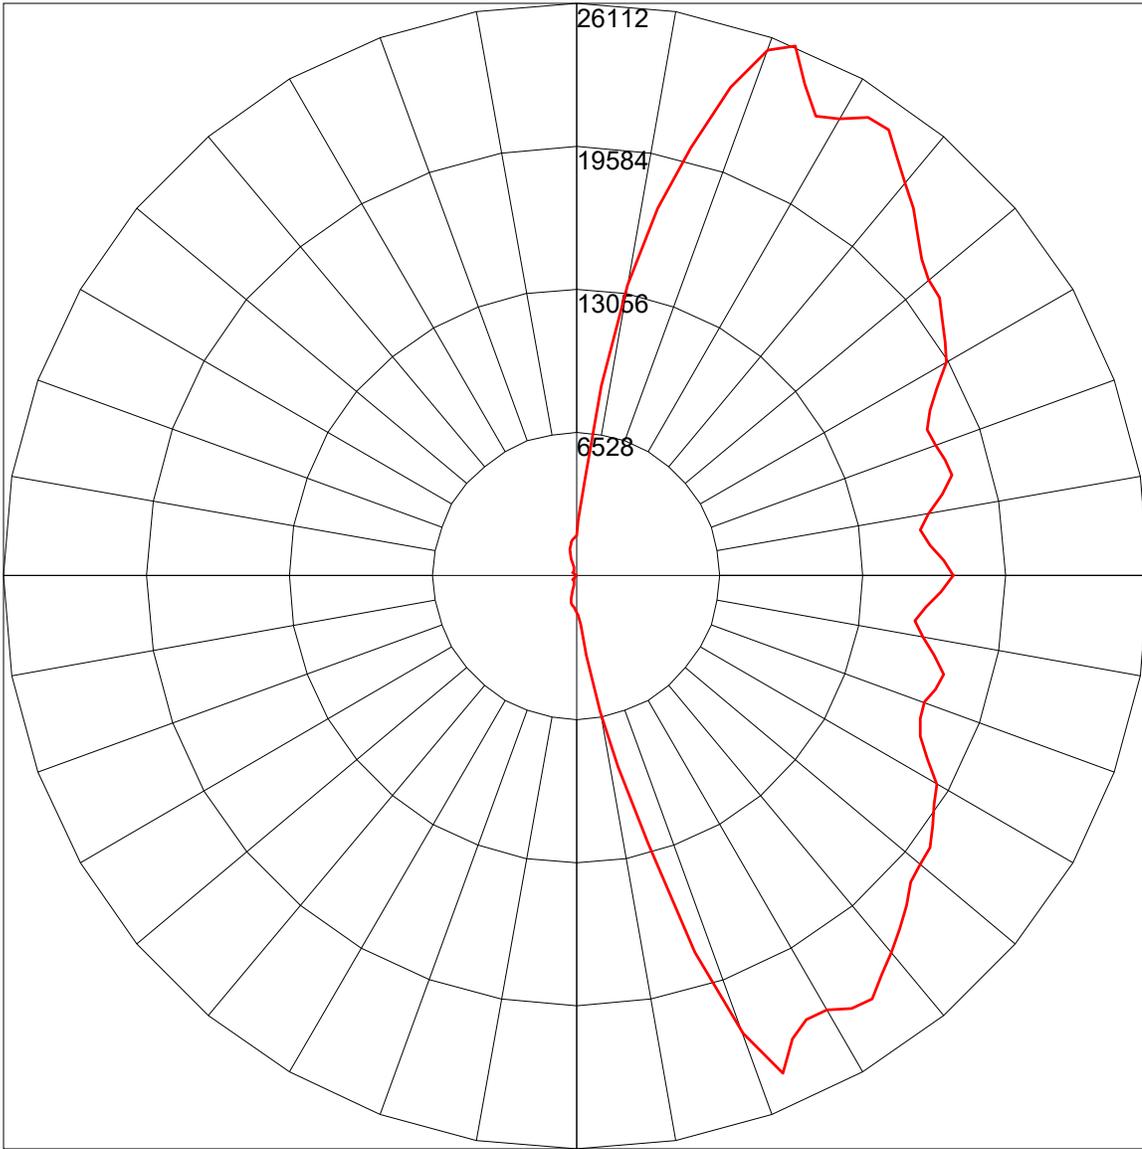


Maximum Candela = 26112.25 Located At Horizontal Angle = 67.5, Vertical Angle = 70
Horizontal Cone Through Vertical Angle (70) (Through Max. Cd.)

ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

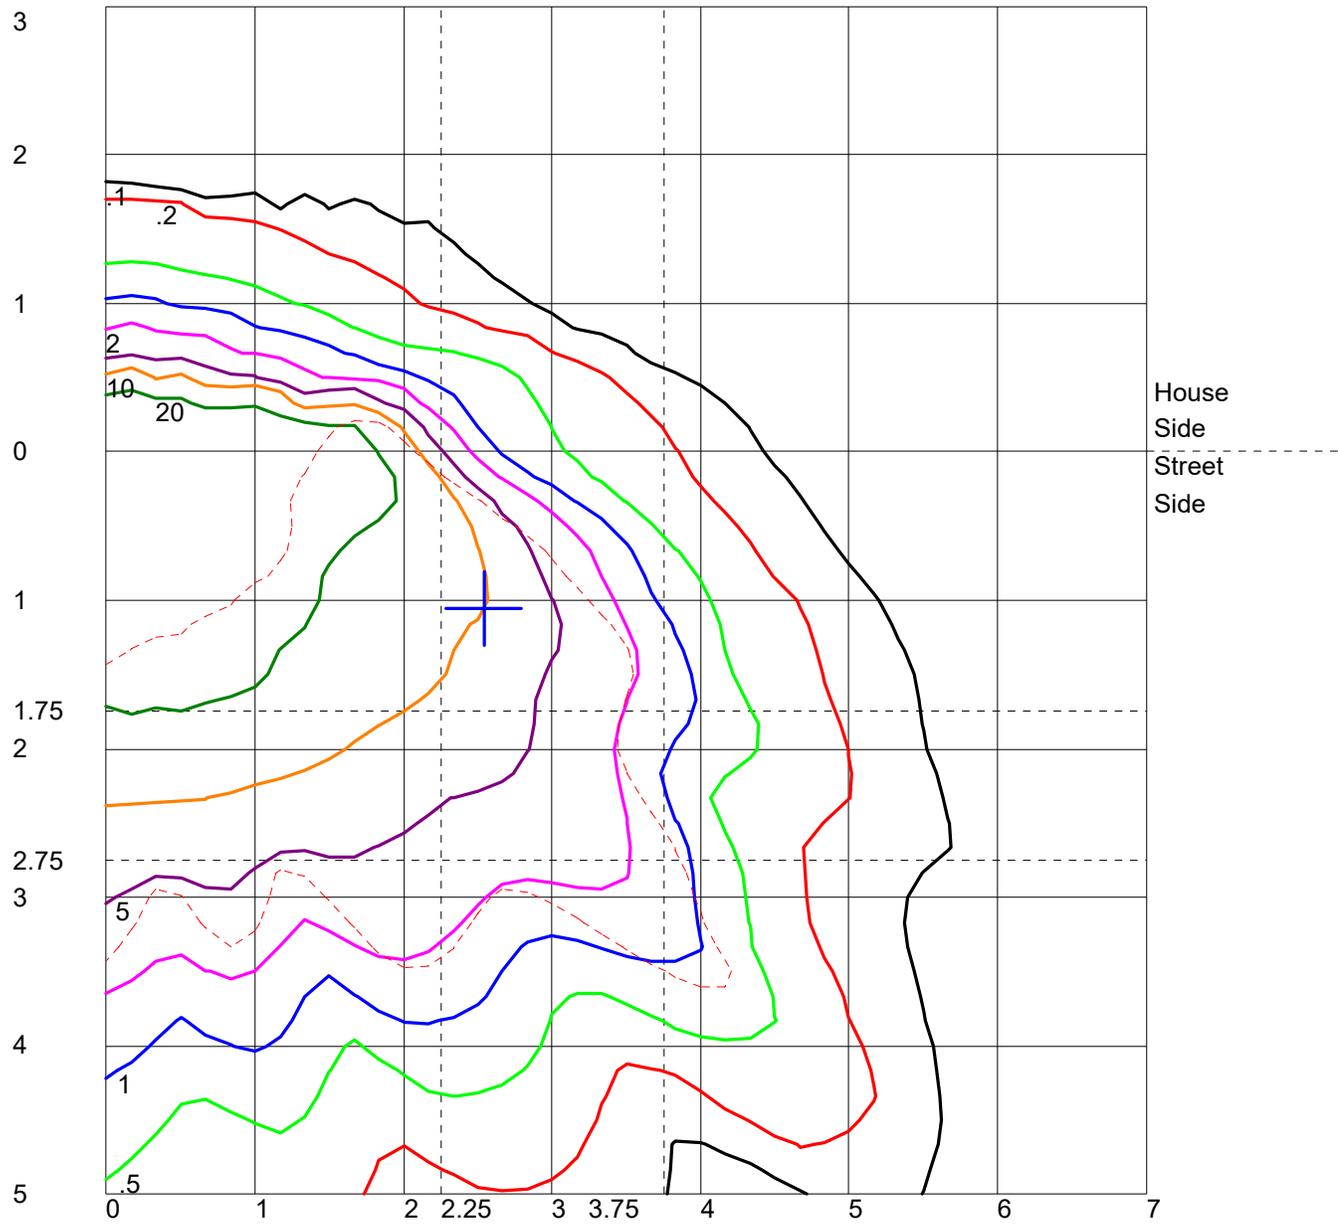

Distance In Units Of Mounting Height
 Values Based On 10 Foot Mounting Height
 1/2 Maximum Candela Trace Shown As Dashed Curve
 (+) = Maximum Candela Point

LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH

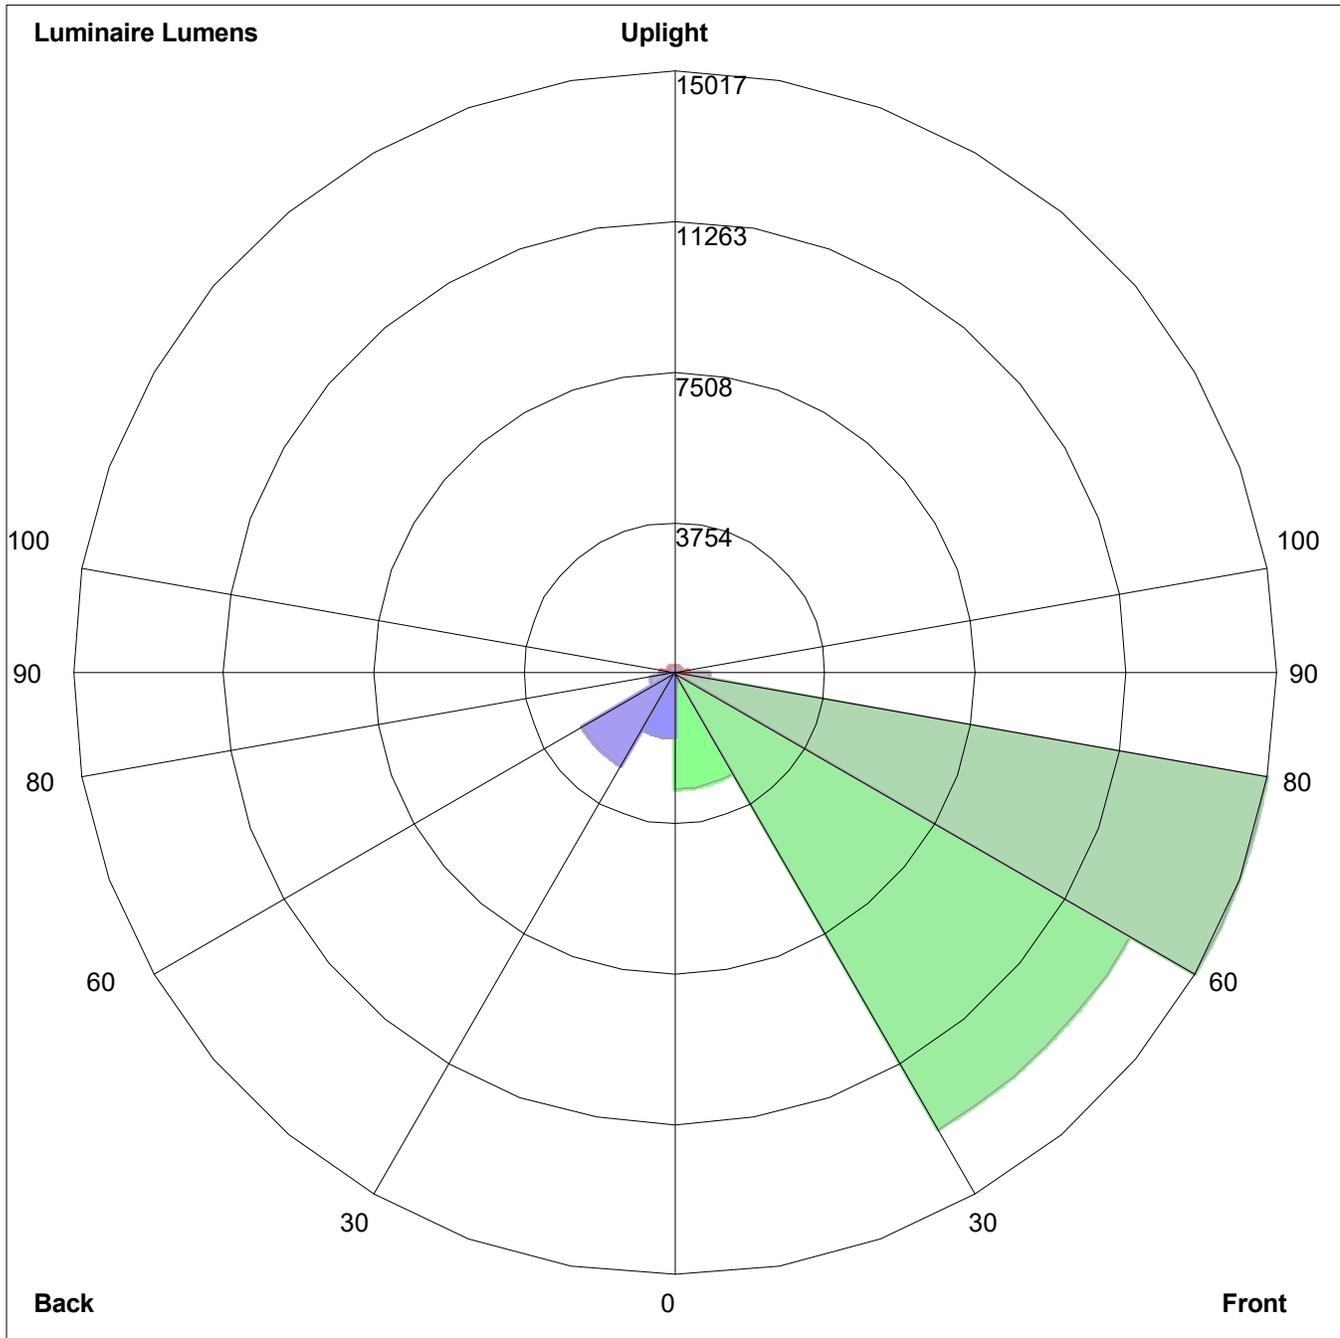

Luminaire Lumens:
Front: Low=2894.2, Medium=13146.5, High= 15017.0, Very High=866.9
Back: Low=1604.2, Medium=2657.2, High=606.9, Very High=18.3
Uplight: Low=353.2, High=180.1

BUG Rating : B3-U3-G5