




DRILLING COMPANY, INC. **WICHITA, KANSAS**

Proposed Wellbore Configuration

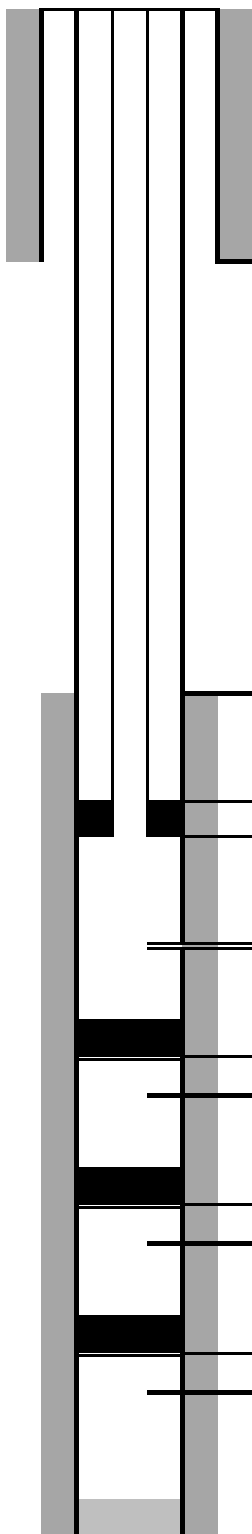

8-5/8" 24# surface csg set at 351'
 Cement to surface w/ 325 sks

TOC at 4891' (CBL 11/25/80)

Proposed: 2-7/8" tbg set at 5440'

Proposed: Arrow AS-1 packer set at 5445'

Morrow Perfs: 5472'-5490' (72 holes)

Cement retainer set at 5600' (12/08/80)

Spergen Perfs: 5607'-5615' (17 holes)

Squeezed w/ 100 sks

Cement retainer set at 5625' (11/29/80)

Spergen Perfs: 5634'-5642' (17 holes)

Squeezed w/ 100 sks

Cement retainer set at 5665' (11/22/80)

Spergen Perfs: 5670'-5671' (5 holes)

Squeezed w/ 175 sks

5-1/2" 15.5# production csg set at 5658'
 Cemented w/ 435 sks

Date:	4/6/2022
Well Name:	MUSF #19
F/K/A:	McCormick 22-9 #9
Original Op:	Champlin Petroleum Co.
Effective Date:	10/1/1984
Location:	1986' FNL & 1969' FWL SE/4 NW/4 9-14S-49W
County:	Cheyenne
State:	Colorado
API:	05-017-06284
KB:	4431'
GL:	4439'
Spud Date:	10/26/1980

Formation	Log Top
GREENHORN	1664'
DAKOTA	1760'
CHEYENNE	2080
MORRISON	2278'
STONE CORRAL	3110'
NEVA	3740'
FORAKER	3816'
SHAWNEE	4110'
LANSING	4390'
MARMATON	4752'
CHEROKEE K	4921'
ATOKA	5119'
MORROW	5320'
ST LOUIS	5548'
SPERGEN	5604'

PBTD: 5552'
 RTD: 5700'