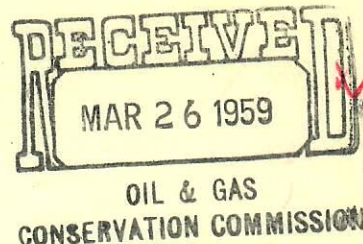


OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO

99999999

PLUGGING RECORD

061-05047

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator JEFF HAWKS, ET AL Field Wildcat XXXXX
 Lease Name STATE Well No. 16-1 County ADAMS
 Location C NW NW Section 16 Township 3-S Range 60-W Meridian 6-2
 (Quarter Quarter)
659 feet from NORTH Section line and 662 feet from WEST Section Line
 N or S E or W

TOTAL DEPTH 6562'DATE OF PLUGGING MARCH 13, 1959

AJJ

DVR

WRS

HHM

JAM

EJP

JJD

FILE

DETAILS OF WORK

SPUDDING: 6:00 P.M. 3-6-59. Drilled 112' of 12-1/4" hole.

CASING: Ran 3 Jts. of 8-5/8" drill pipe. Total pipe run was 98.09'; set at 112.09' KB w/100 sx of regular 3% CaCl Cement. Plug down @ 12:30 A.M. 3-7-59.

ELEVATION: 5029.3 GL - 5041.3 KB WELL RESULTS: D&A

CORING: Christensen corehead -- Cored 6443 - 6459'; barrel jammed 16' in 6 Hrs. Rec 13-1/2': 1' sd, grey, reworked, tite, fine grain, hard, many black sh laminae; 1/2' sh, black, hard, fissile; 1' sd, grey, very fine grain, hard, tite, poor P&P, black sh laminae, no shows; 2' sd grey, very fine grain, hard, tite w/vert fractures, poor P&P, no shows; 1' sh, black, hard, fissile w/fine grey sd stringers & lenses--no shows; 4' alternate sd & sh, laminae--no shows; 2' sh, black, hard, coarse, grey sd lenses--no shows; 2' sh, black, hard, highly frac. Sample top of the 'D' 6439; 'J' 6484 from 6505 to 6510'. Very few clusters of sd w/possible staining, but the staining due probably from residual oil of some kind.

LOG TOPS: Niobrara 5622; Ft. Hays 6000; Carlile 6041; Green Horn 6113; Bentonite 6344; 'D' 6441; 'J' 6496; Schlumberger TD 6562; Driller's TD 6555'.

PLUGGING: Verbal permission to plug obtained from Mr. Rogers 3-12-59, using 10 sx plug at bottom of surface pipe and 5 sx plug at top. Plugged 3-13-59 in accordance with Mr. Rogers' instructions.

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Date MAR 26 1959

Director

Company BRINKERHOFF DRILLING CO. Date MARCH 25, 1959
870 DENVER CLUB BLDG.Address DENVER 2, COLORADO Phone No. AC 2-9733By Burr M. Roberts Title GEOLOGIST
(Signature) - BURR M. ROBERTS

00792532