


OFFICE OF STATE OIL INSPECTOR  
Oil and Gas Conservation  
Department



Locate  
Well  
Correctly

LOG OF OIL AND GAS WELL

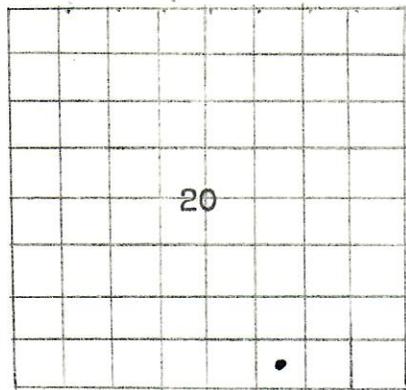

Company Trigood Oil Company Address Box #1689, Casper, Wyo.  
~~State~~ Patented Pomeroy Field Atwood State Colorado  
Well No. J-9 Sec. 20 T. 7N R. 53 Meridian 6th County Logan  
(N) (E) Sec. 20  
Location 330 Ft. SS of S Line and 1650 Ft. (W) of E line of / Elevation 4100 KB  
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Date 11-30-51 Signed [Signature] Title Assistant Manager

The summary on this page is for the condition of the well as above date.

Commenced drilling 9-10, 1951 Finished Drilling 9-24 1951

OIL SANDS OR ZONES

No. 1, from 4702 to 4728 No. 4, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

IMPORTANT WATER SANDS

No. 1, from -- to -- No. 3, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 4, from \_\_\_\_\_ to \_\_\_\_\_

CASING RECORD

Size	Weight per ft.	Threads per inch	Make	Amount	Kind of Shoe	Cut & Pulled from	Perforated From	Perforated to	Purpose
10 3/4	32.75	8rd	H-40	161.72	Guide	--			Surface
5 1/2	14	8rd	J-55	4723	Guide		4720	26	Production

MUDDING AND CEMENTING RECORD

Size	Where Set	No. Sacks of Cement	Methods Used	Mud Gravity	Amount of Mud Used
10 3/4	174.52	115	Plug	--	
5 1/2	4733	150	Plug	--	

PLUGS AND ADAPTERS

Heaving plug-Material \_\_\_\_\_ Length \_\_\_\_\_ Depth Set \_\_\_\_\_  
Adapters-Material \_\_\_\_\_ Size \_\_\_\_\_

SHOOTING RECORD

Size	Shell Used	Explosive Used	Quantity	Date	Depth Shot	Depth Cleaned Out

TOOLS USED

Rotary Tools used from 0 Entirely ft. to 4734 KB ft. and from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
Cable tools were used from \_\_\_\_\_ ft. to \_\_\_\_\_ ft. and from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

DATES

11-30 1951 Put to producing 10-13 1951  
The production for the first 24 hours was 78 barrels of fluid of which  
100 % was oil, -- % emulsion; -- % sediment. Gravity 36 API  
If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft.  
of gas \_\_\_\_\_ Rock Pressure, lbs. per sq. in. \_\_\_\_\_

EMPLOYEES

Miracle & Fifer D rlg. Cont. Driller B. W. Swift, Driller  
E. V. Hunter Driller I. Stotler, Driller

FORMATION RECORD

From	To	Total Feet	Formation
0	710	710	Fox Hills
710	3840	3130	Pierre
3840	4150	310	Niobrara
4150	4193	43	Ft. Hayes
4193	4370	177	Carlisle
4370	4380	10	Greenhorn
4380 - T. D.			Graneros
4620	4640	20	"D" Sand
4702 - T. D.			"J" Sand