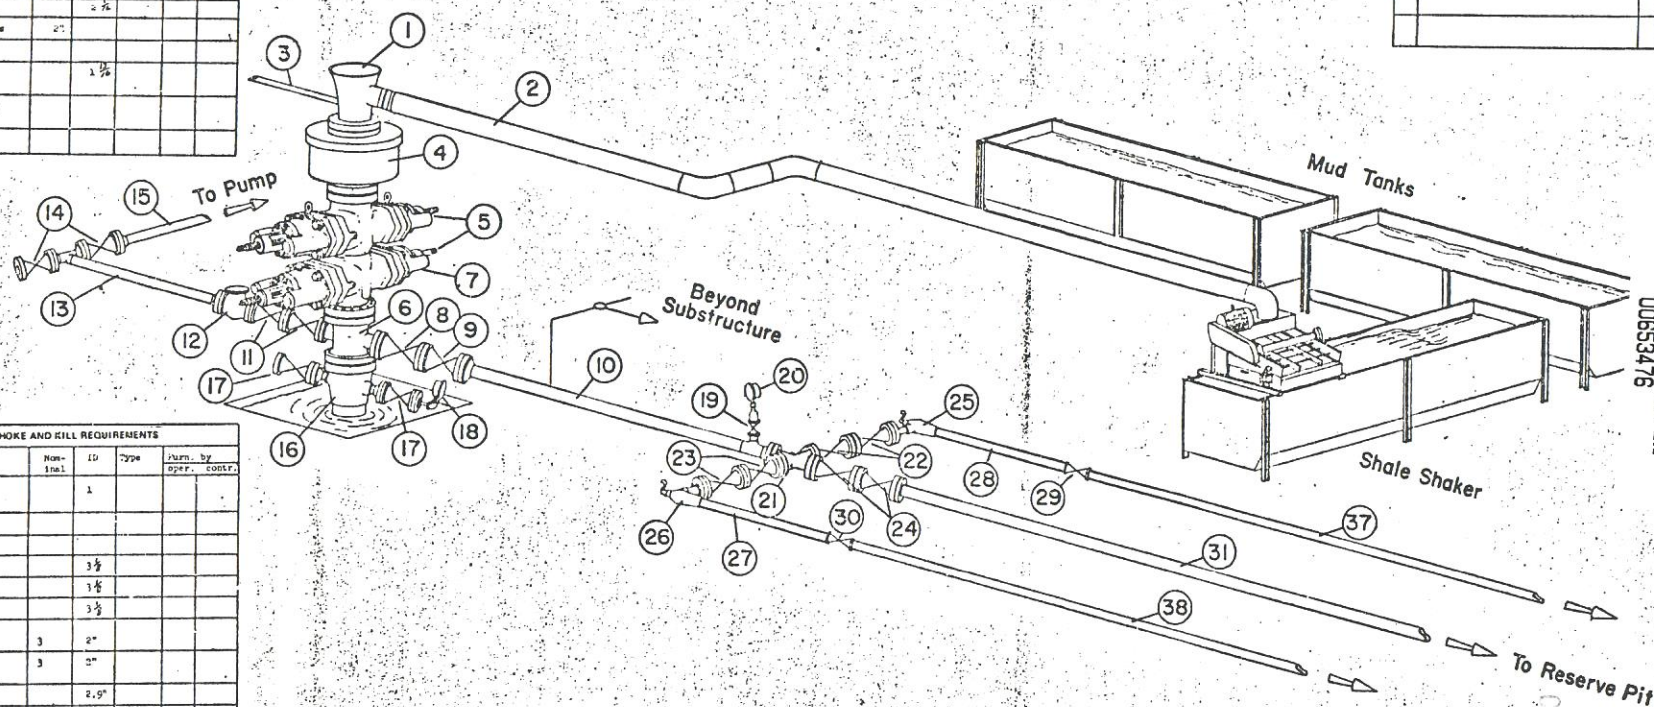


Well _____ Casing _____
Contractor and operator to furnish items checked (x)

STANDARD STACK REQUIREMENTS					
No.	Item	Max. Size	ID TD	Type	Turn. by over 1 conf.
1	Drilling Whipple				
2	Flowline				
3	Fill up line	2"			
4	Annular Preventor			Hydril Cameron Shaffer	
5	Two single or one dual Hyd. oper. rams			U. JAC. F. MC	
6	Drilling Spool with 2" and 3" outlets			Forged	
7	As Alternate to (6) run and Kill lines from outlets in this run.				
8	Valve Gate		3 1/2"		
9	Valve-Hydraulically operated Gate		3 1/2"		
10	Choke Line		2 1/2"		
11	Cate Valves		2 1/2"		
12	Check Valve		2 1/2"		
13	Kill Line	2"			
14	Valves-Gate		2 1/2"		
15	Kill line to Pumps	2"			
16	Casing Head		1 1/2"		
17	Valves Gate Flse		1 1/2"		
18	Compound Pressure Langer				
	Wear Bushing				

[illegible]

SPECIAL STACK REQUIREMENTS

[illegible]

STANDARD CHOKE AND KILL REQUIREMENTS					
No.	Item	Nom- inal	ID	Type	Turn. by oper. contr.
19	Valve Gate _____ Plug _____		1		
20	Compound Pressure				
21	Cross 3"x3				
22	Valve Gate		3 7/8		
23	Valve Gate		1 1/2		
24	Valve Gate		3 7/8		
25	Choke Inn N=2 or equivalent	3	2"		
26	Choke Inn N=2 or equivalent	3	2"		
27	Line to Separator			2.5"	
28	Line to Separator			2.5"	
29	Valve Gate			3 1/2	
30	Valves Gate			3 1/2	
31	Line to Res. PIT			2.5"	
37	Line to Res.			2.5"	
38	Line to Res. PIT			2.5"	

U0653476

天