


NOTES:

No hydraulic fracturing stimulations completions and no flowback anticipated therefor flowback diagram is not necessary.

Design flow rate: 0.5 MMSCFD
Expected Helium Recovery: 90%
Facility Pad: 200' x 200'

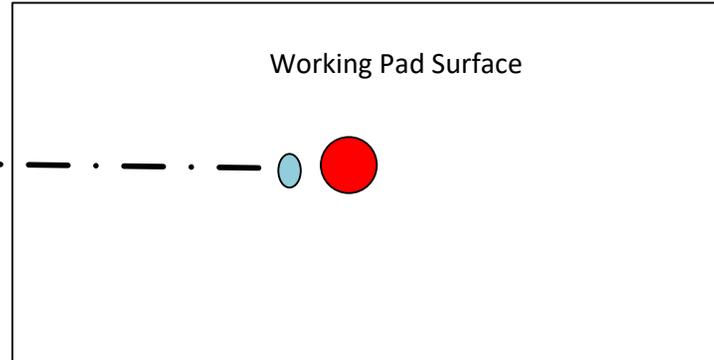

4" or larger buried polyethylene flowline.

Flowlines will carry the product to a skid-mounted helium gas processing and storage unit on private surface.

BNL (Enterprise) Inc.
Bolling 09 NWNW 2960
Section 9 T29S R60W
37.540509, -104.130592
Preliminary Process Flow Diagram

 Orbit valve to manually shut in well

 Wellhead

 Flowline