



# Proposed P&A WBD


Well Name: API 20- 614

Original Hole [Land]

MD (ftKB)

Vertical schematic (proposed)

14.1  
641.1  
840.9  
1,897.0  
2,296.9  
2,298.9  
2,397.0  
3,995.1  
4,075.1  
4,077.1  
4,095.1  
4,601.0  
4,828.1  
6,310.0  
6,596.1  
6,640.1  
6,690.0  
6,701.1  
6,703.1  
6,706.0  
6,766.1  
6,774.9  
6,778.9  
6,782.2  
6,962.9  
6,974.1  
7,095.1  
7,124.0

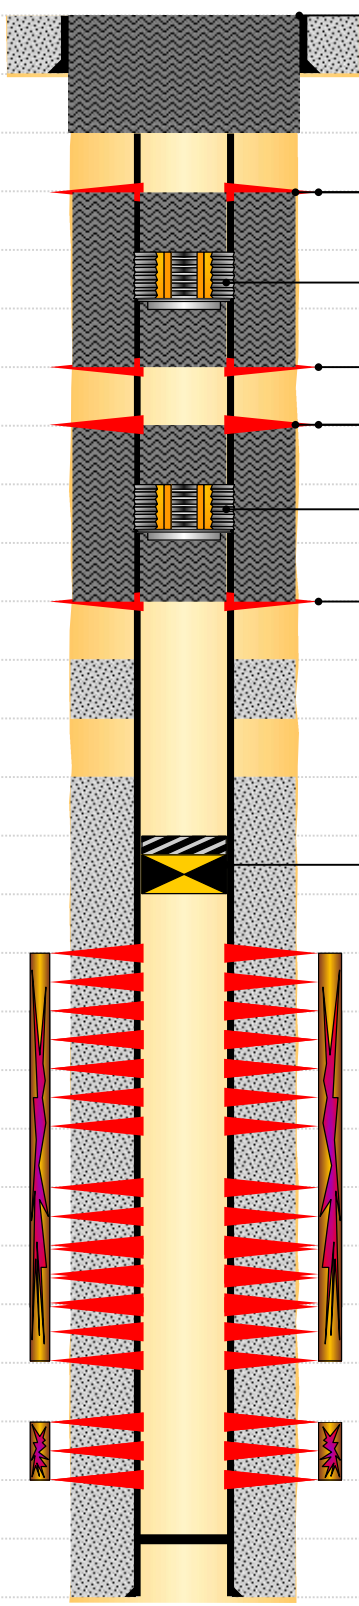

Cement Plug, Plug, 2/7/2024 00:00 (Surface plug); 14-841; 2024-02-07; 280 sks of Class Neat G cement

Balanced Plug (Tubing and Annulus), Plug - Balanced, 2/7/2024 00:00 (Courtesy squeeze); 1897-2397; 2024-02-07; 170 sks through the CICR and 20 sks on top of the CICR  
1,897.0-1,897.0ftKB on 2/7/2024 00:00 (Perforated); 1897-1897; 2024-02-07

3 in, Cement Retainer, 2/7/2024 00:01; 2297-2299; 3; 2024-02-07 00:01

2,397.0-2,397.0ftKB on 2/7/2024 00:00 (Perforated); 2397-2397; 2024-02-07

Balanced Plug (Tubing and Annulus), Plug - Balanced, 2/7/2024 00:00 (Sussex Squeeze); 3995-4095; 2024-02-07; 40 sks of cement through the CICR and 5 sks on top of the CICR  
3,995.0-3,995.0ftKB on 2/7/2024 00:00 (Perforated); 3995-3995; 2024-02-07

3 in, Cement Retainer, 2/7/2024 00:01; 4075-4077; 3; 2024-02-07 00:01

4,095.0-4,095.0ftKB on 2/7/2024 00:00 (Perforated); 4095-4095; 2024-02-07

3 in, Cast Iron Bridge Plug w/ 2 SX Cement, 2/7/2024 00:00; 6596-6640; 3; 2024-02-07