



4.5 CCL -0.5
 0 GR (GAPI) 150
 320 TT3 (usec) 220


0 AMP (mV) 100
 AMPLIFIED AMP3
 0 (mV) 20


0 AMPS1 100
 0 AMPS2 100
 0 AMPS3 100
 0 AMPS4 100
 0 AMPS5 100
 0 AMPS6 100
 0 AMPS7 100
 0 AMPS8 100


200 VDL 1200
 1 RADIAL MAP 8
 1 80

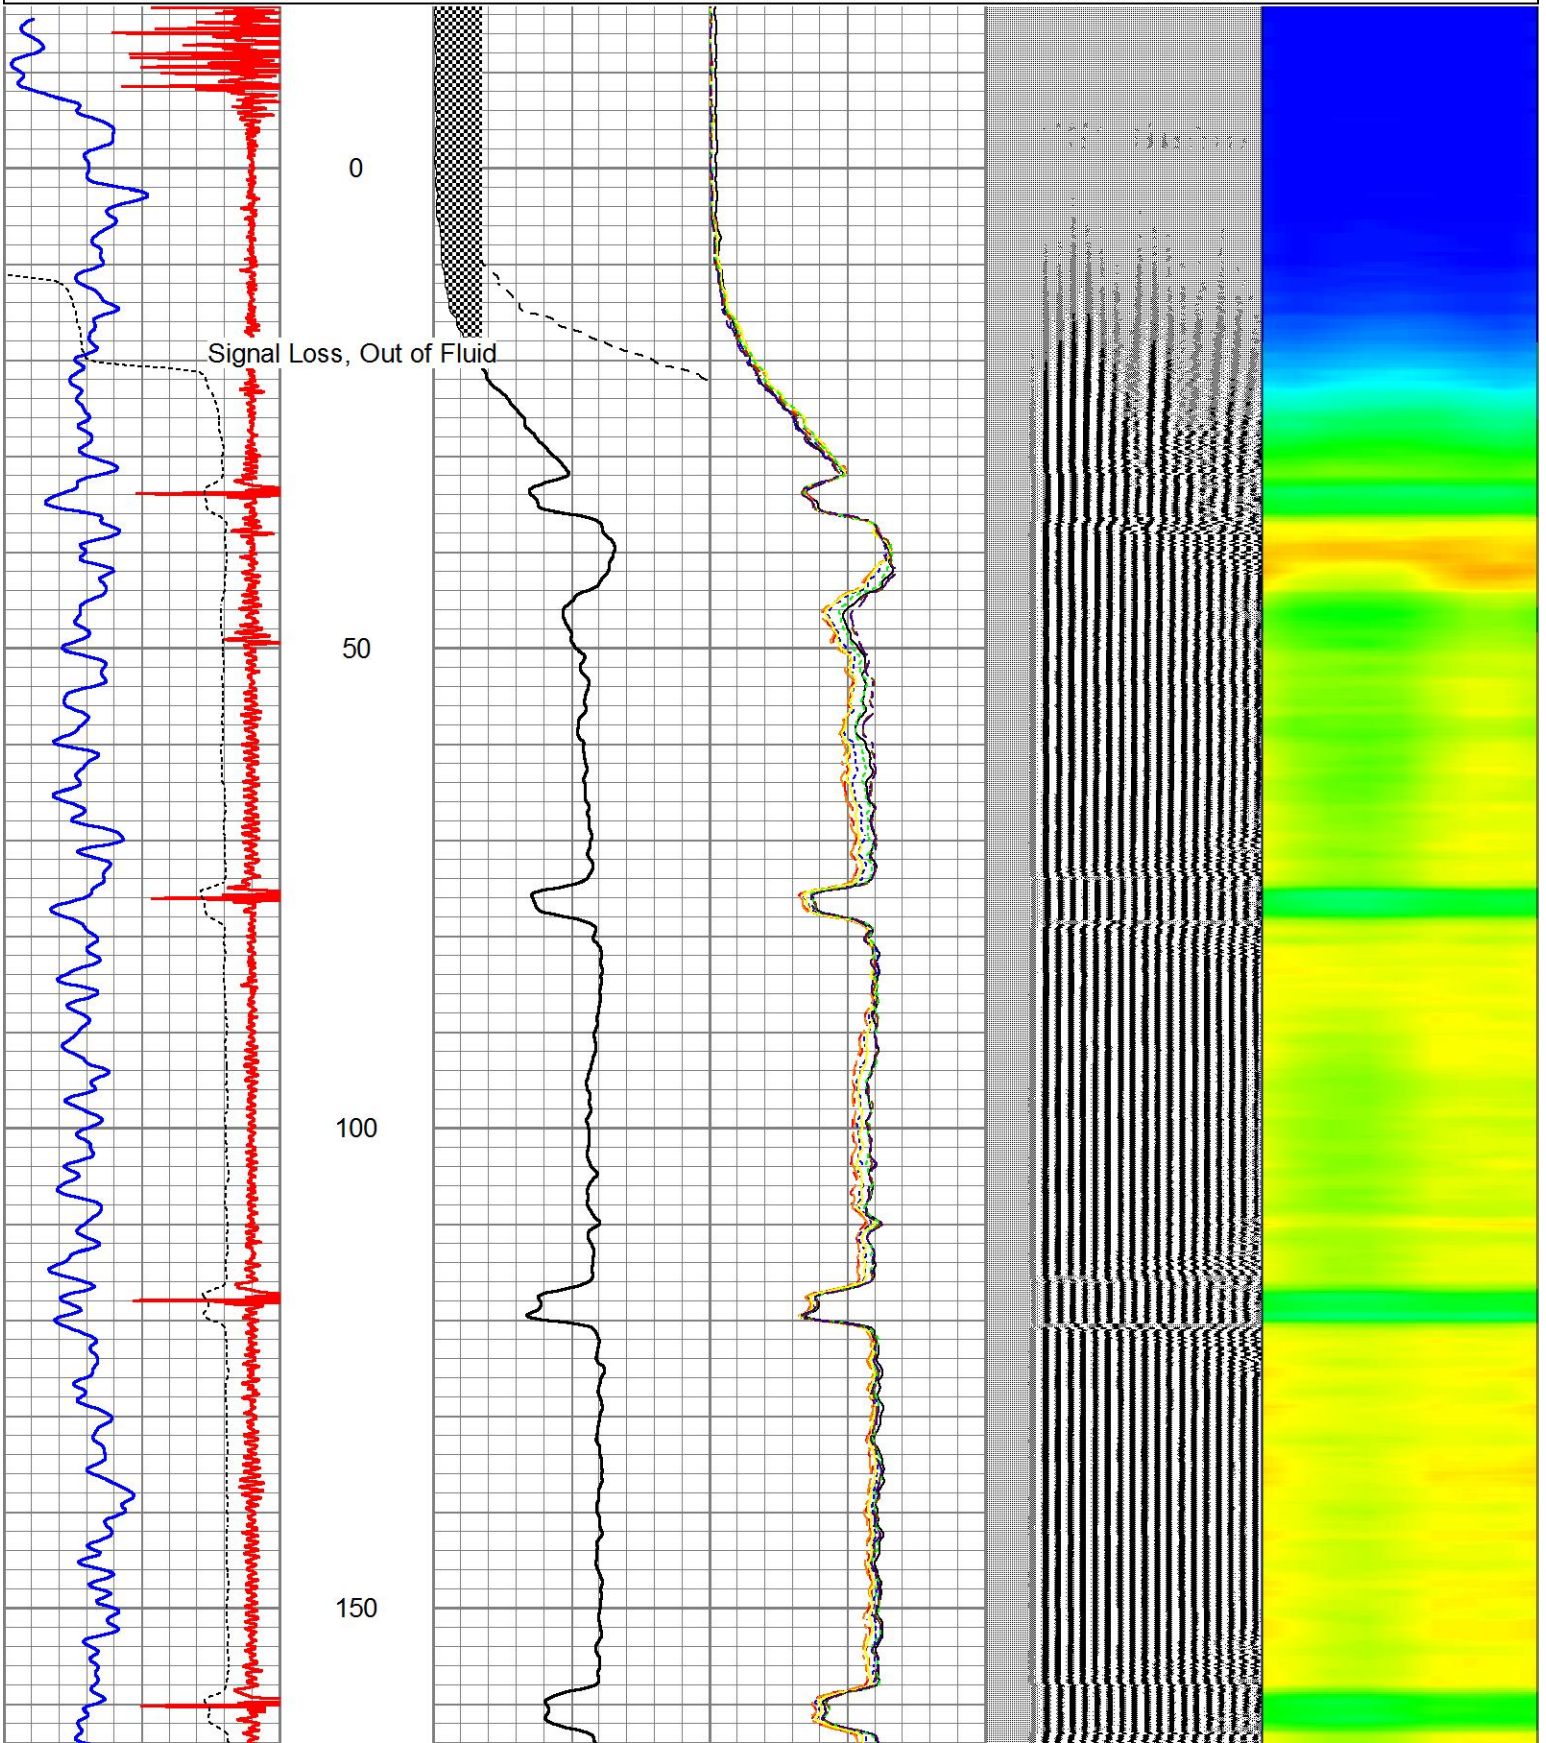


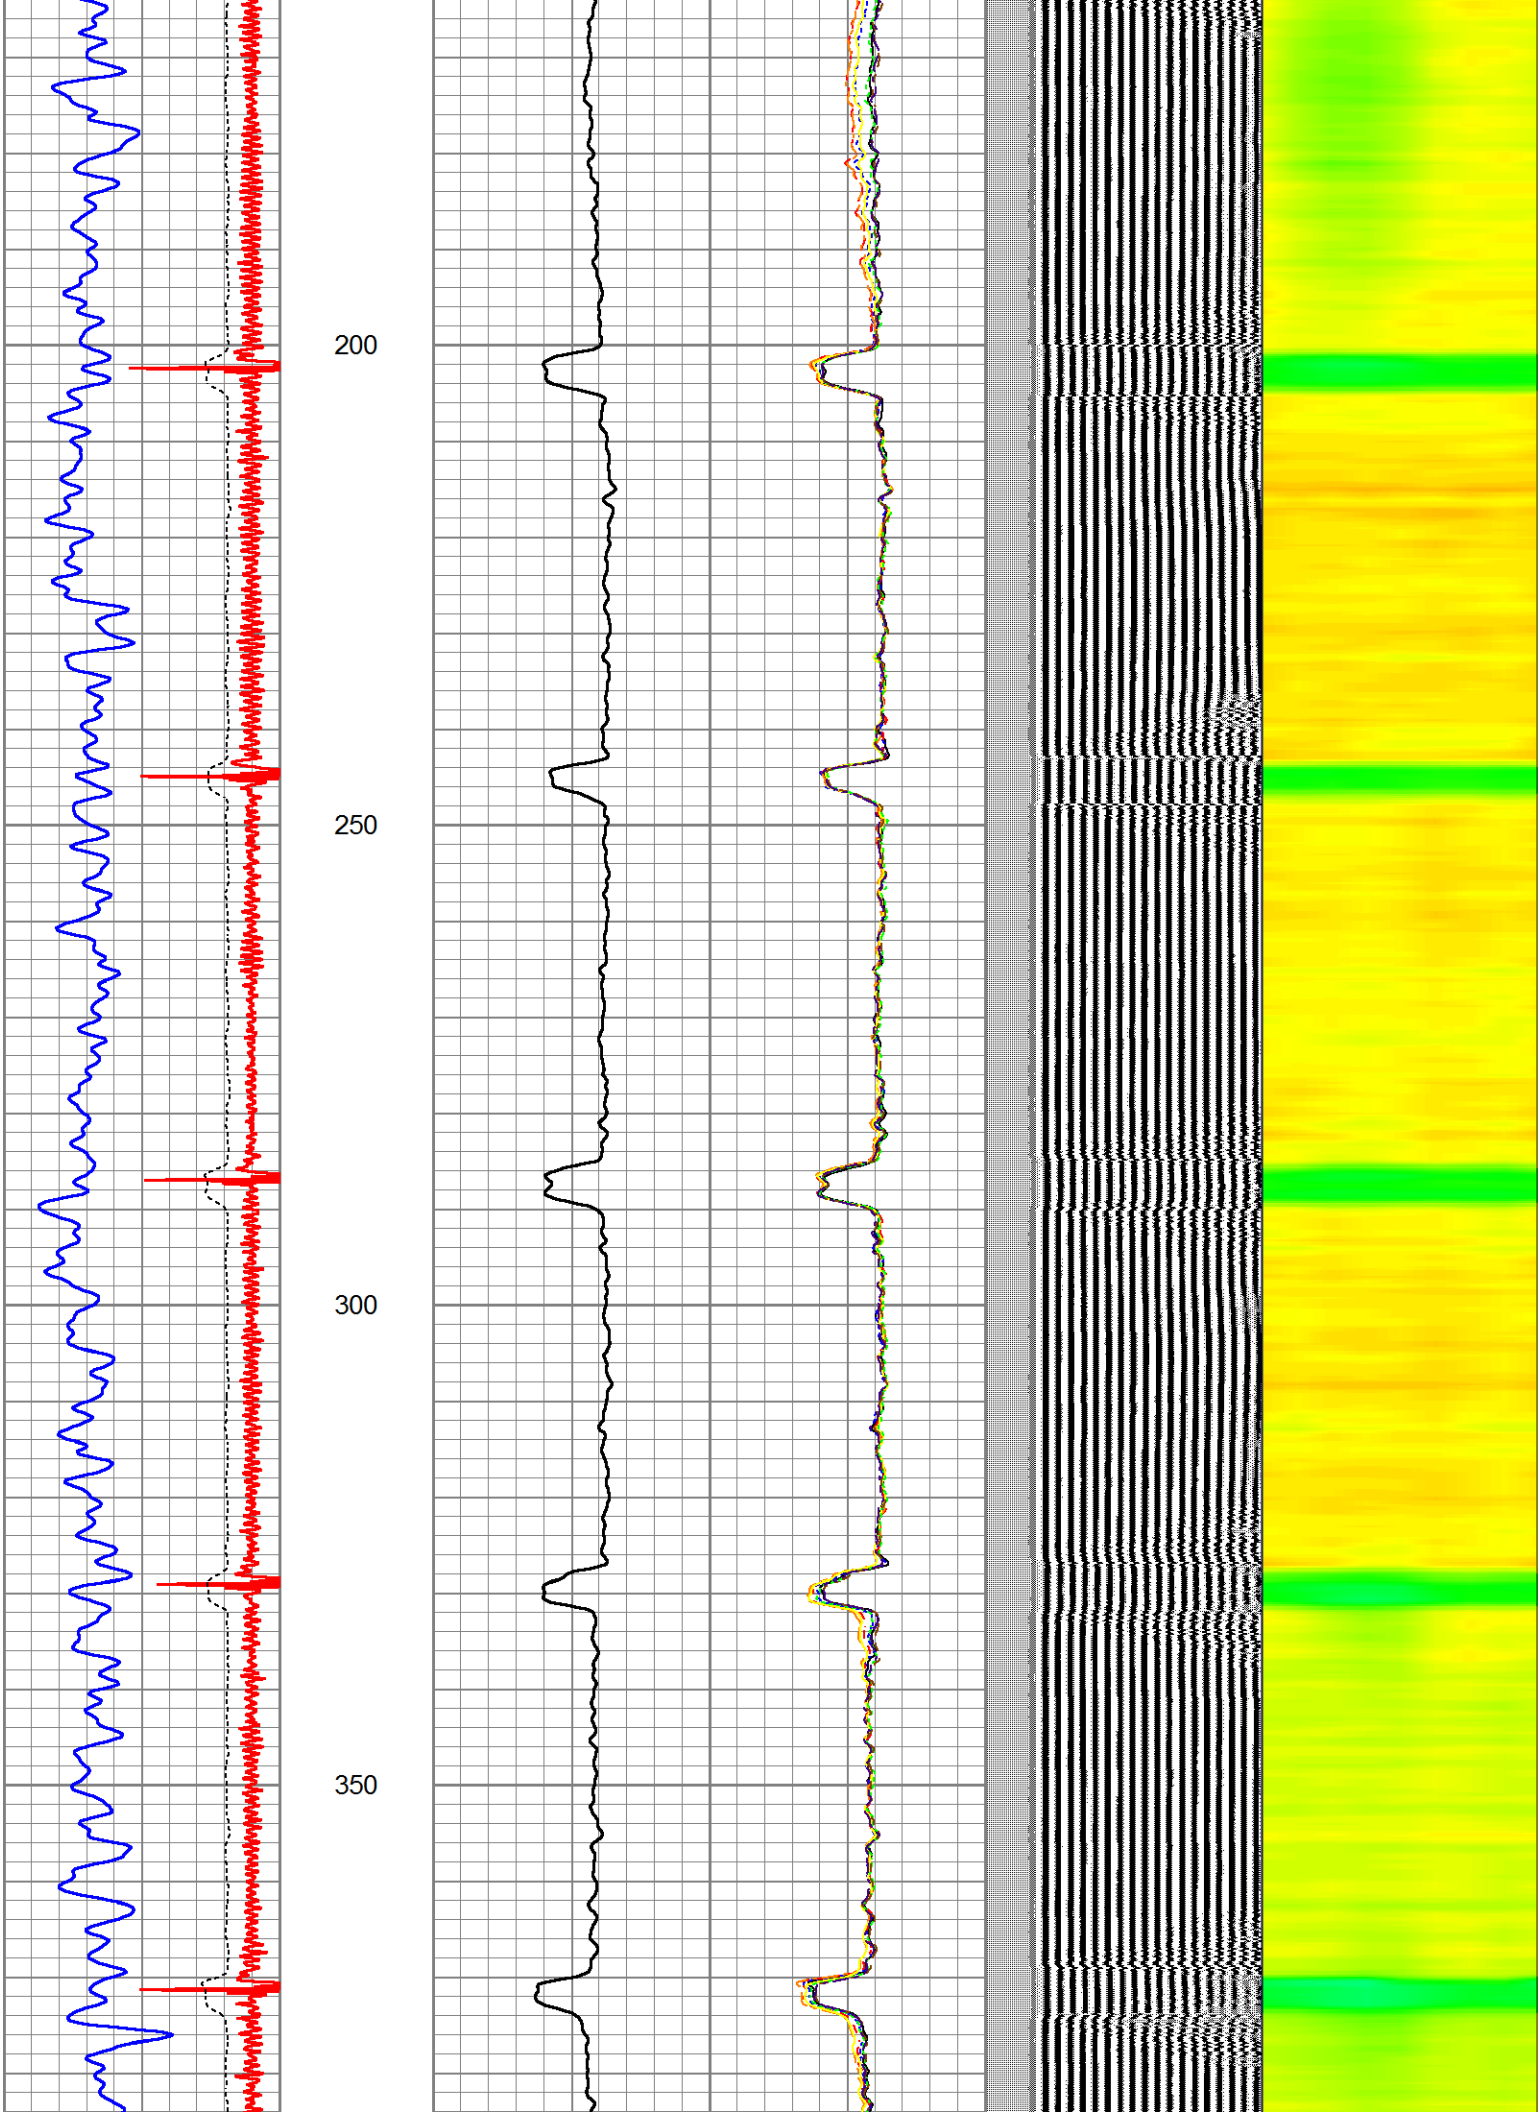


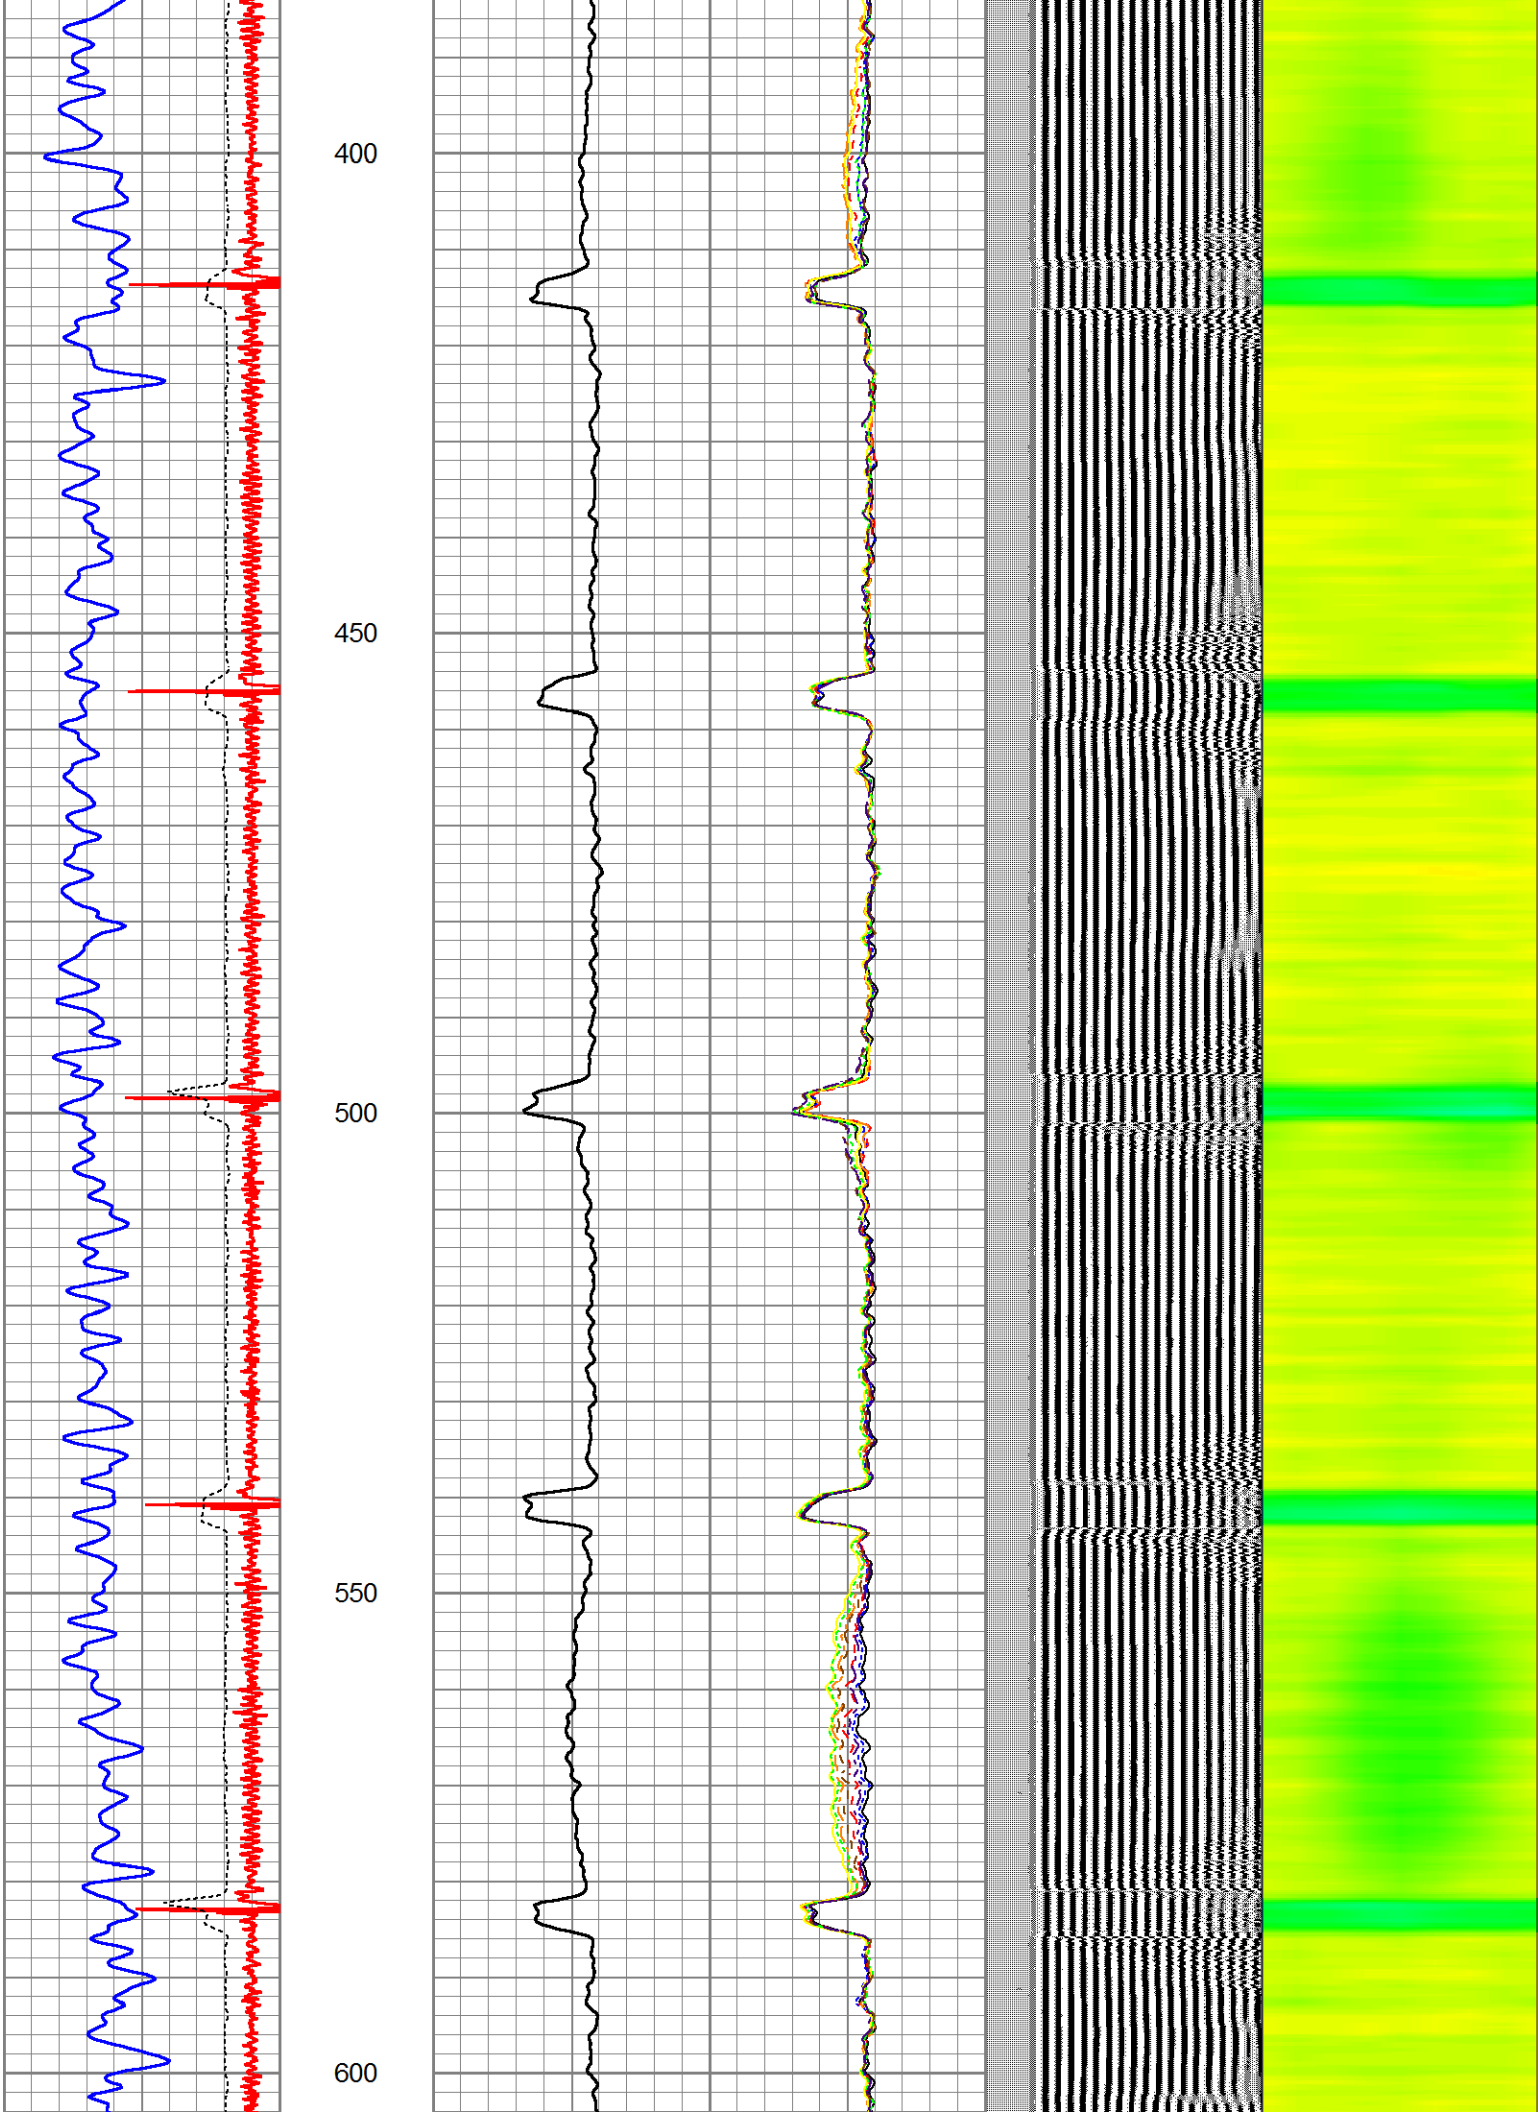


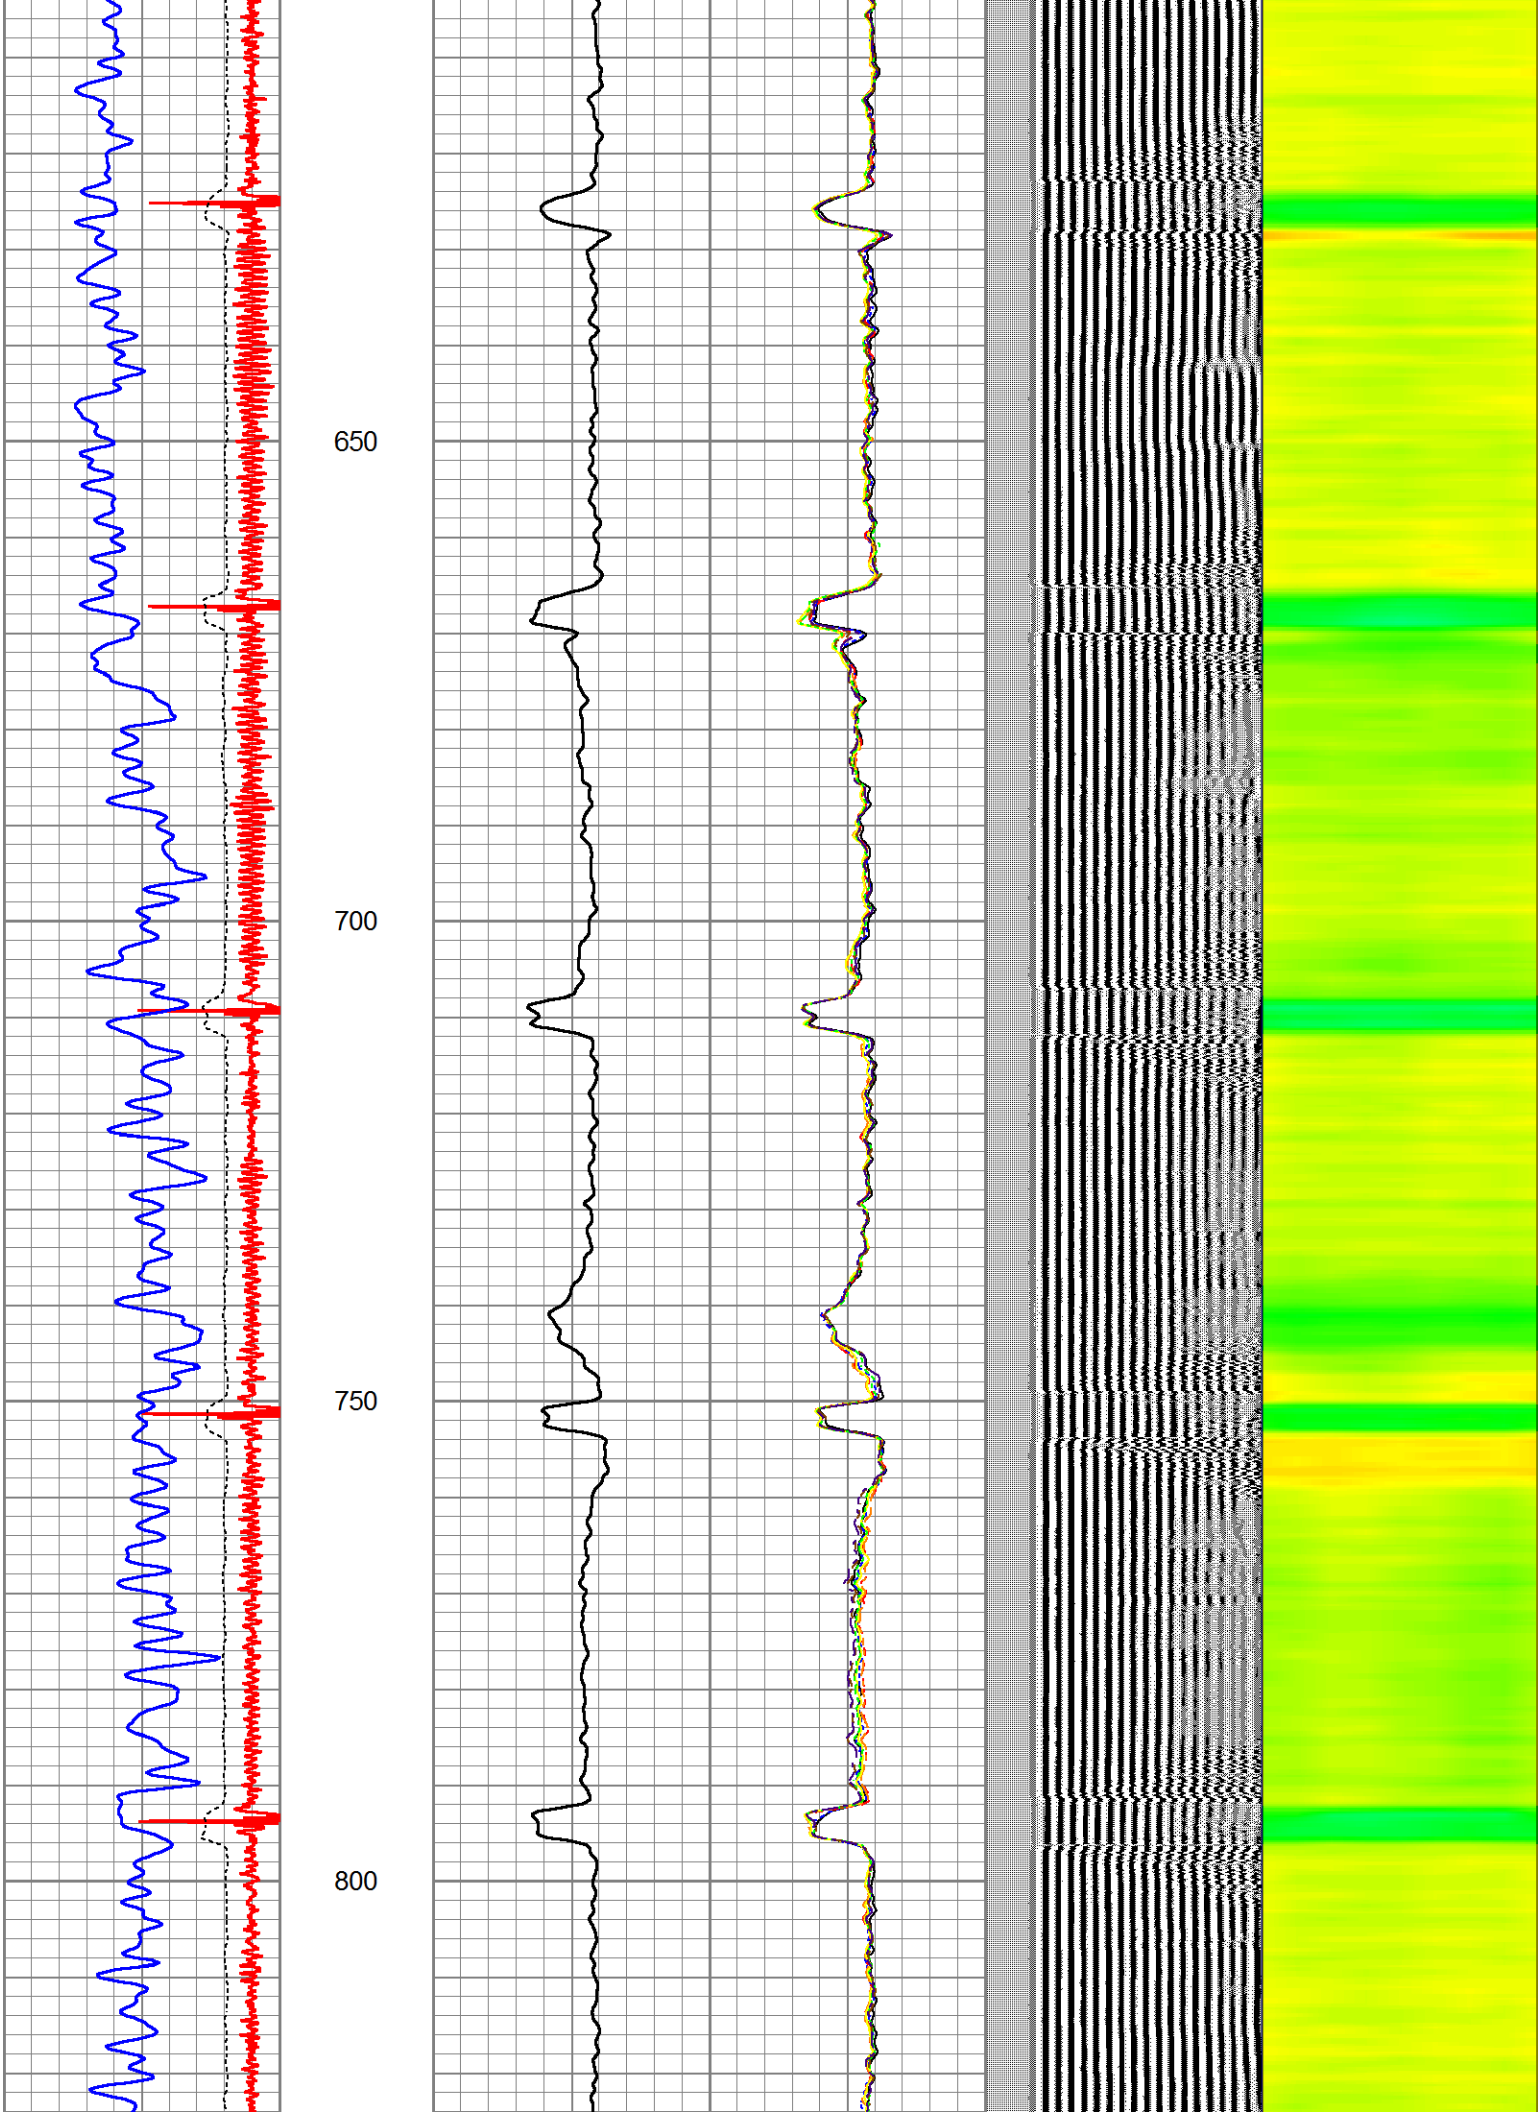

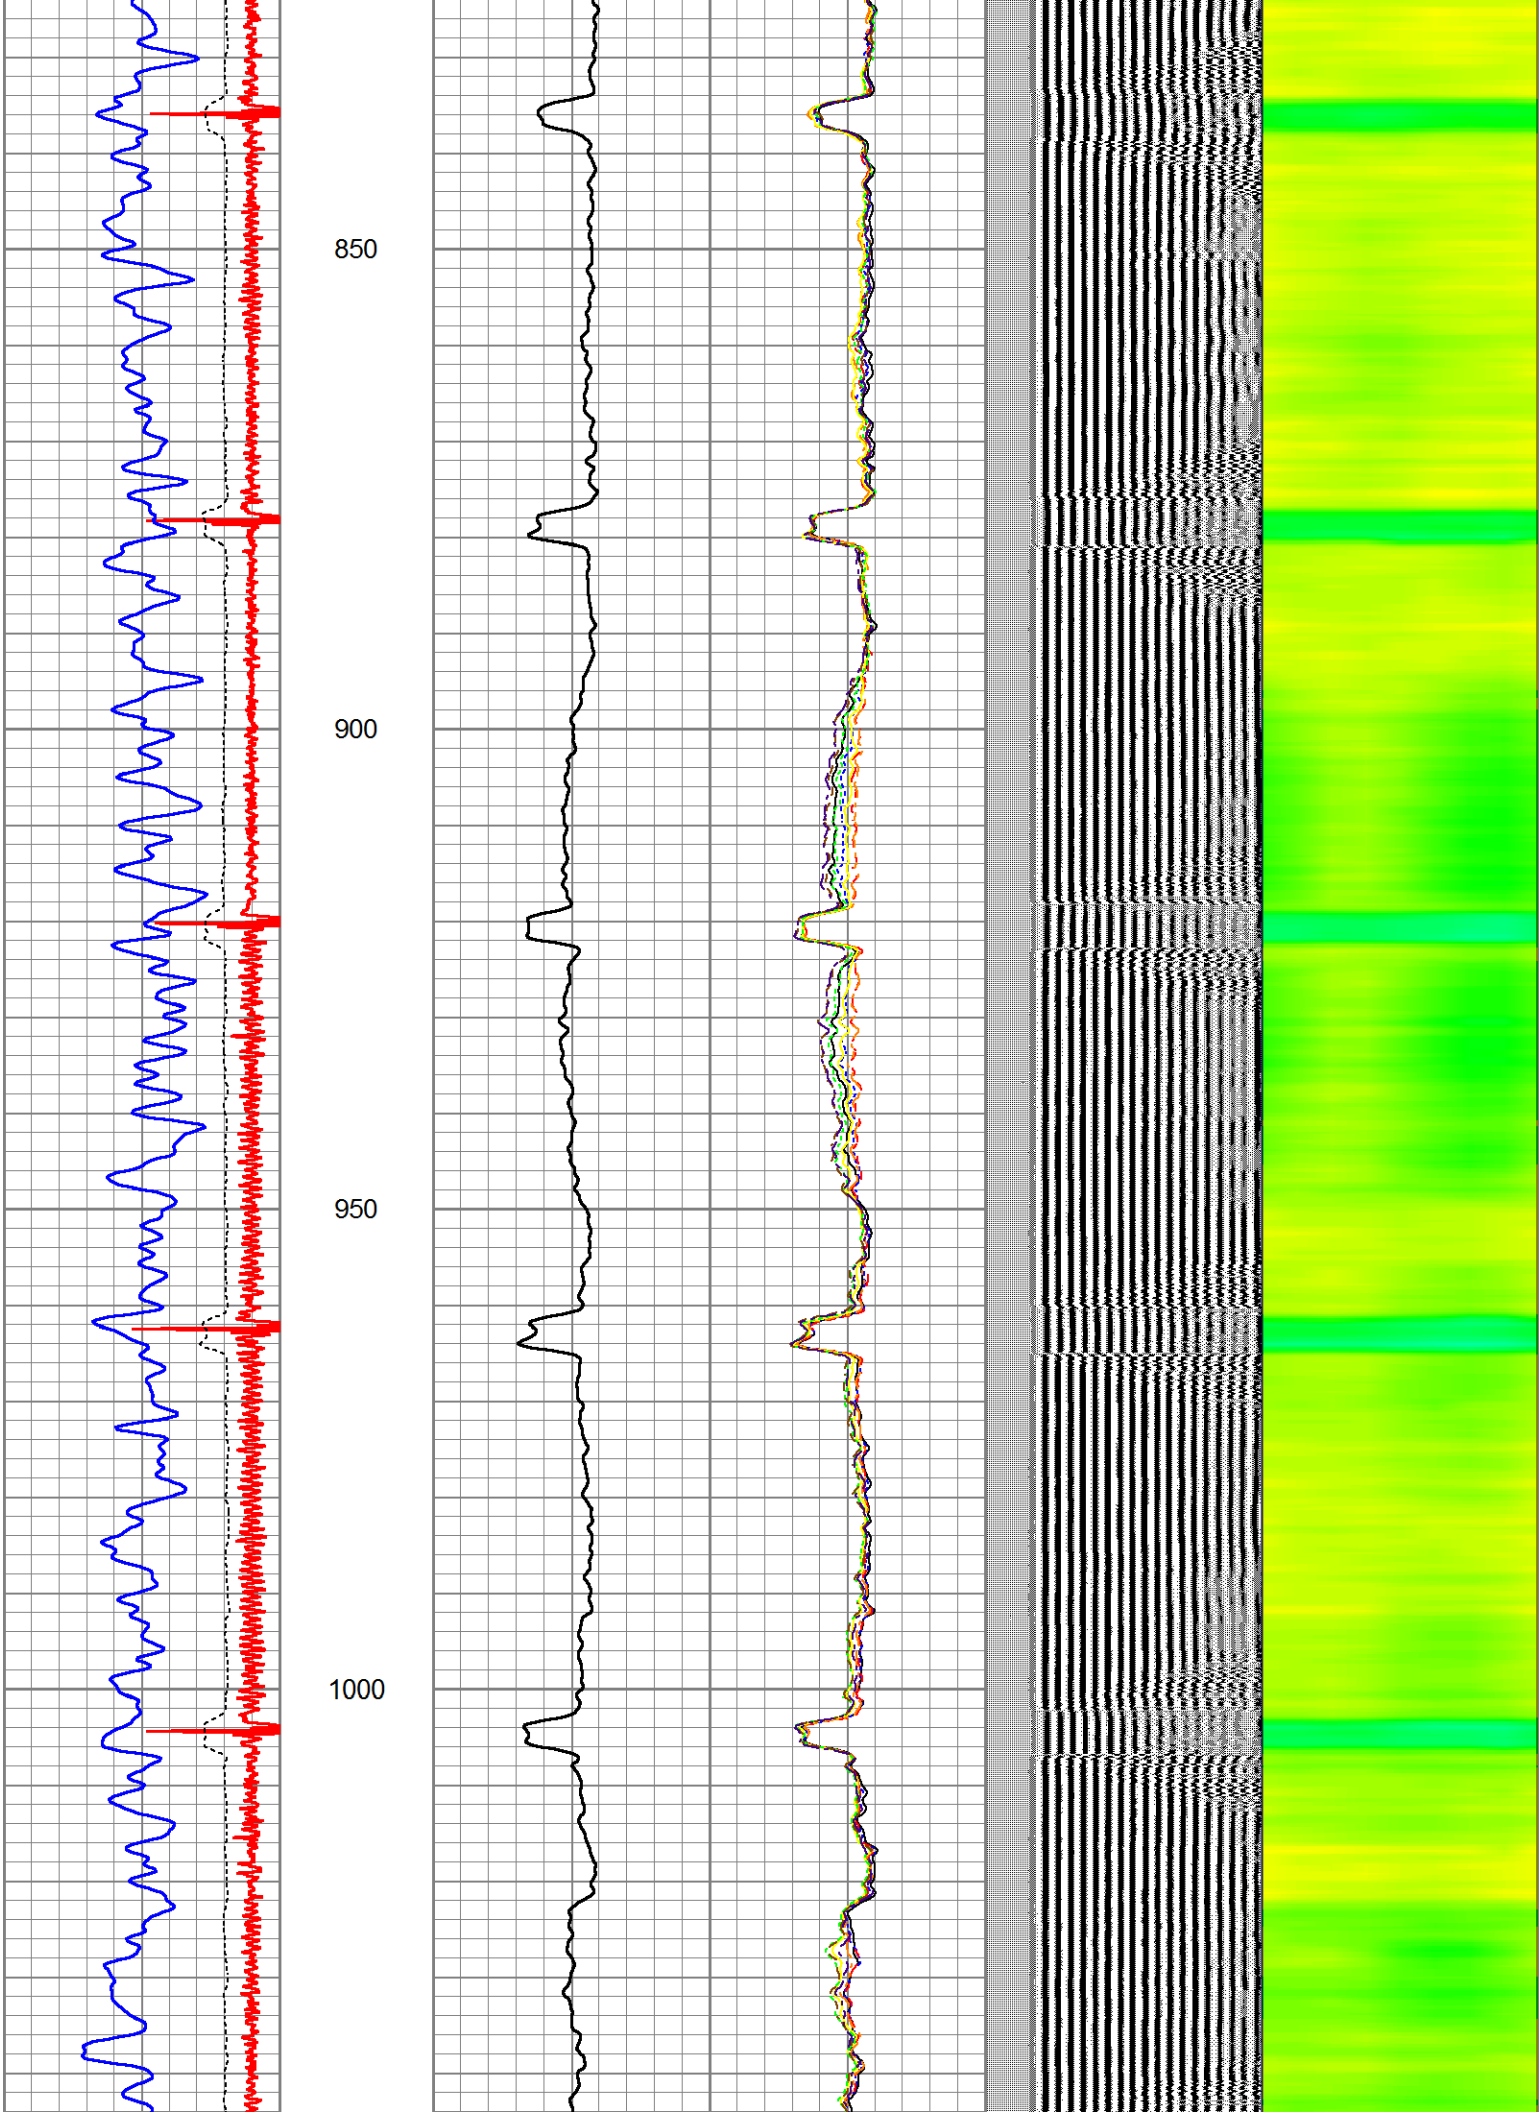

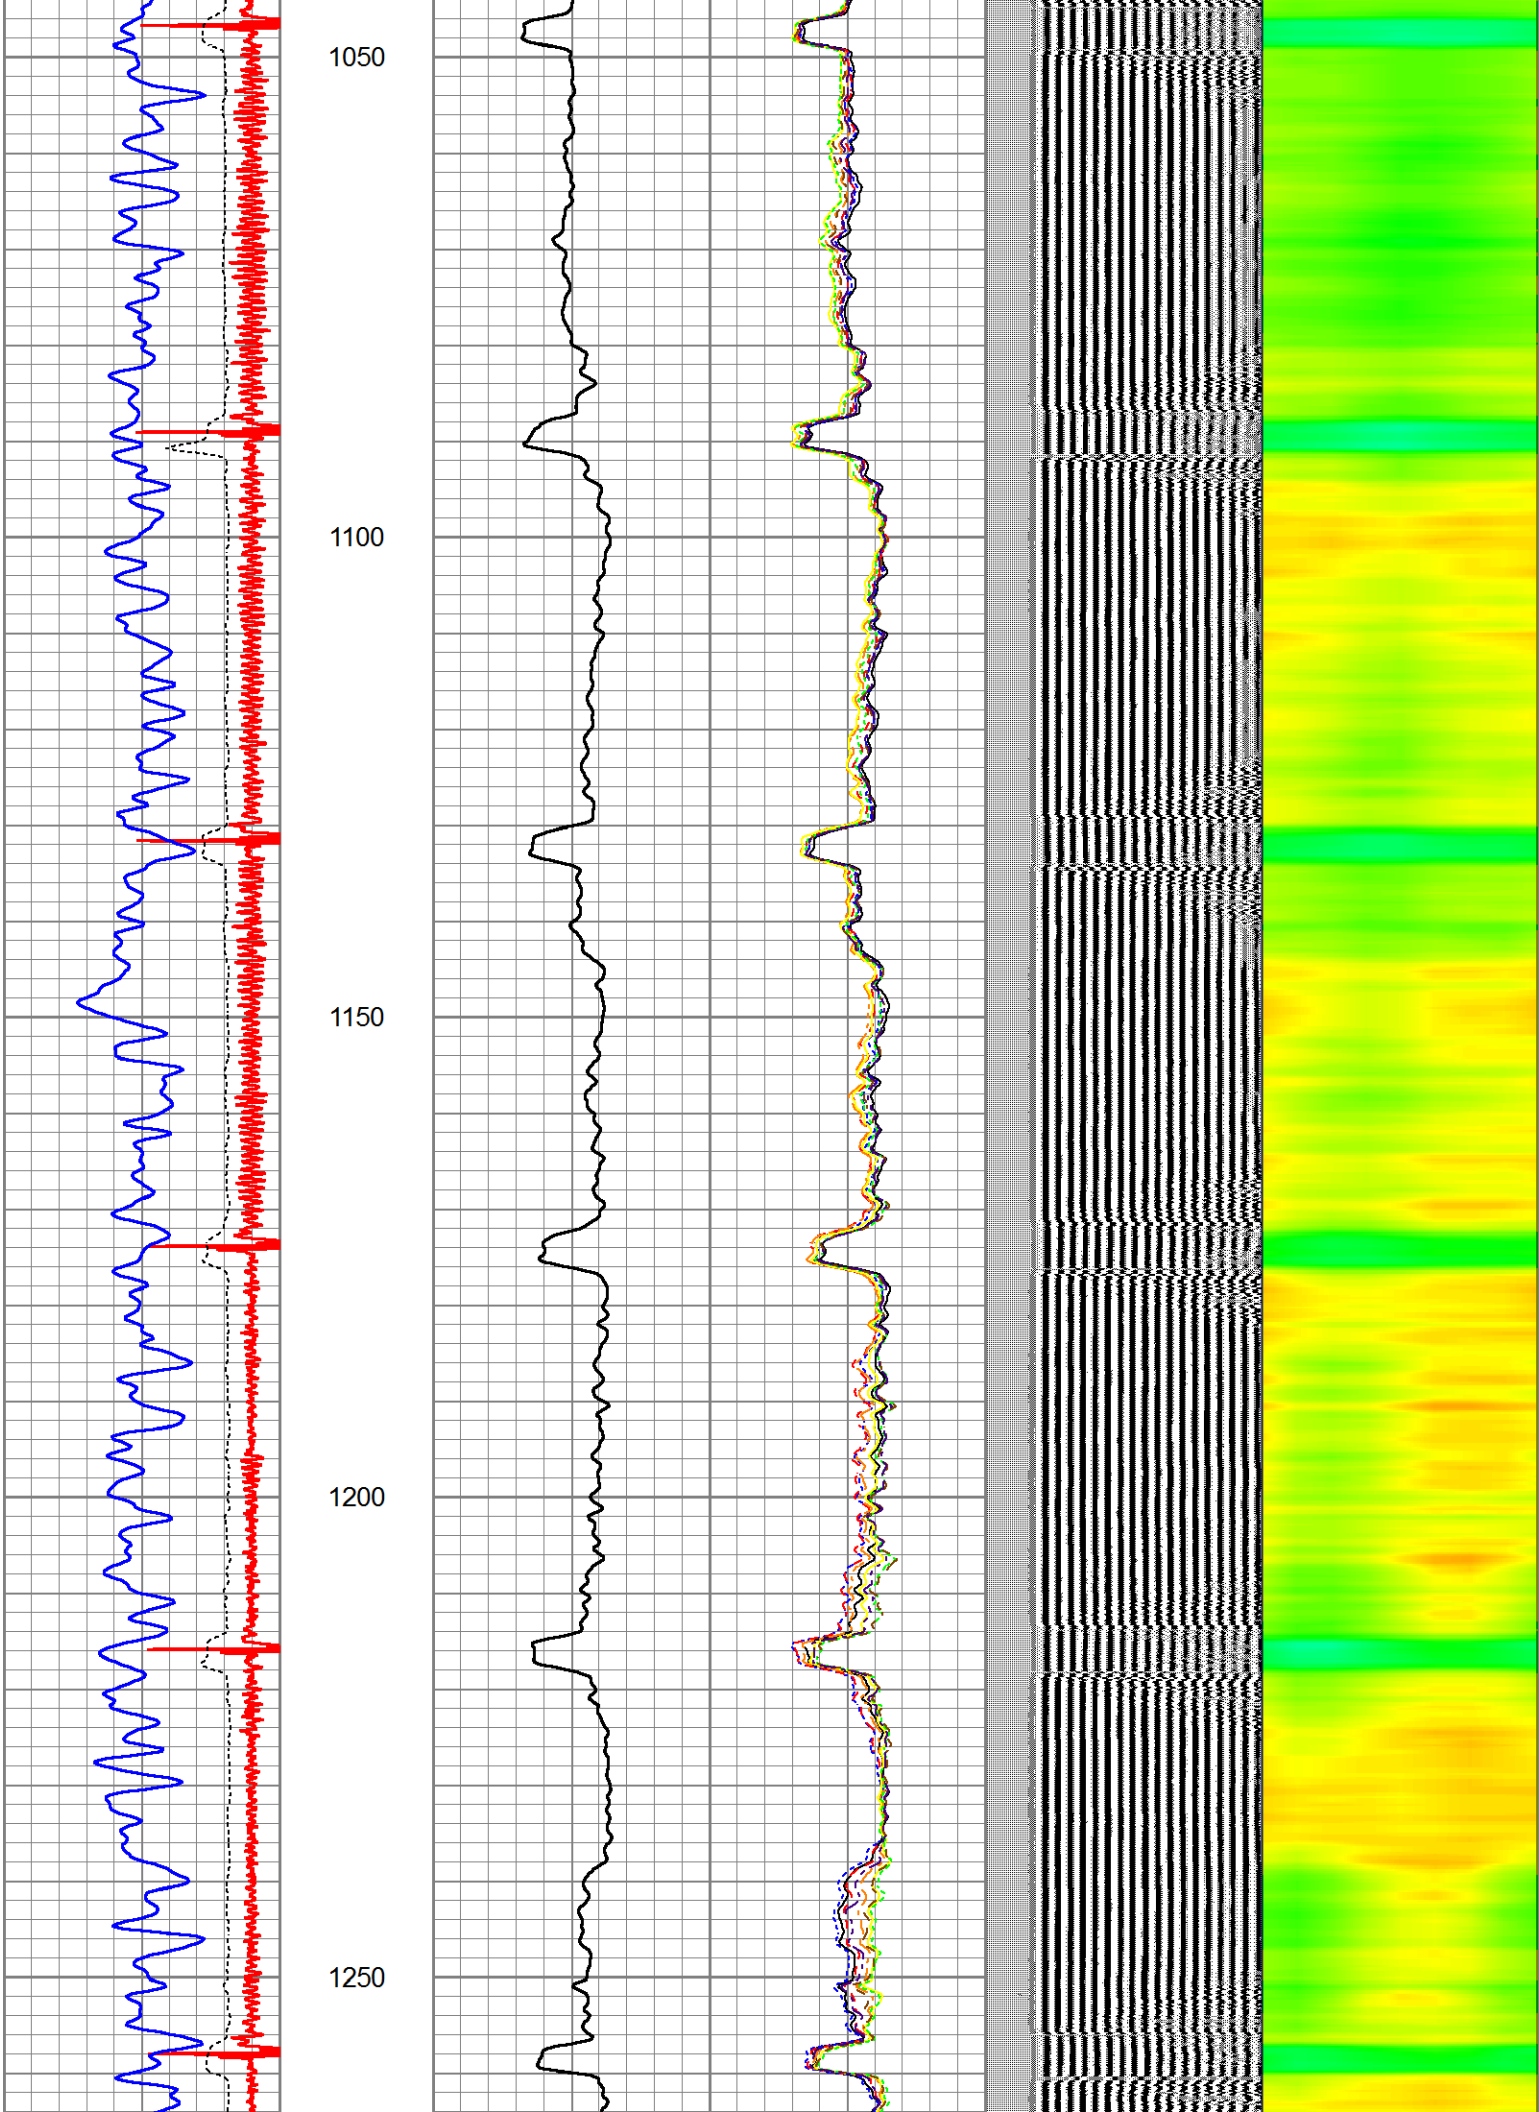

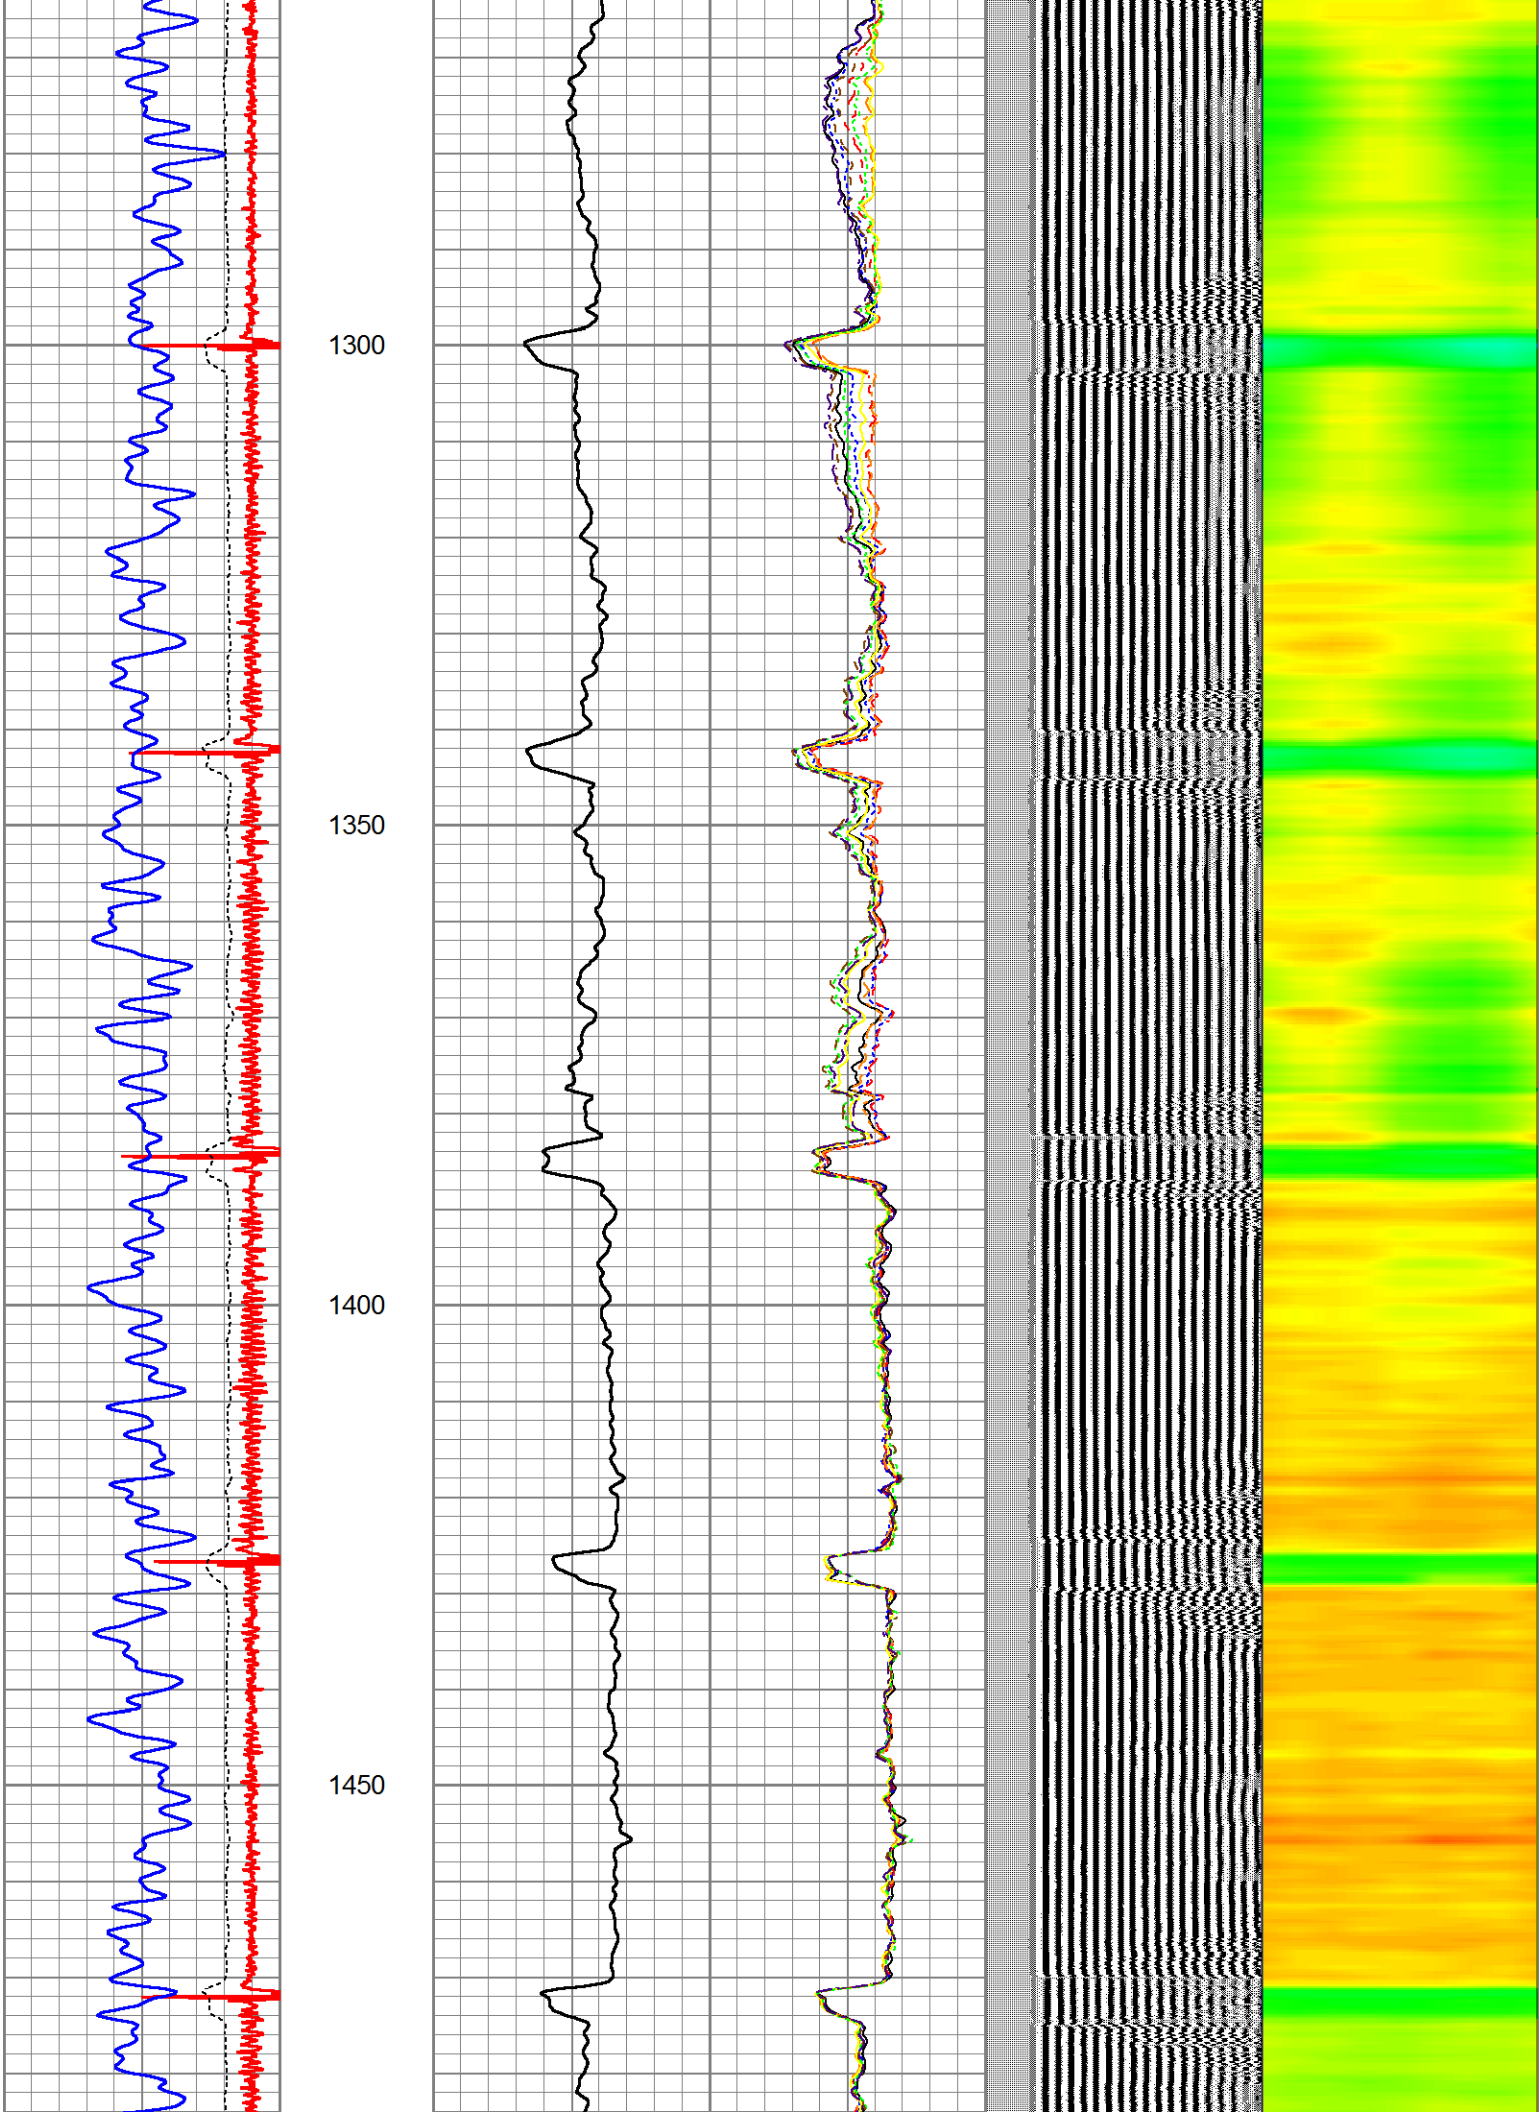

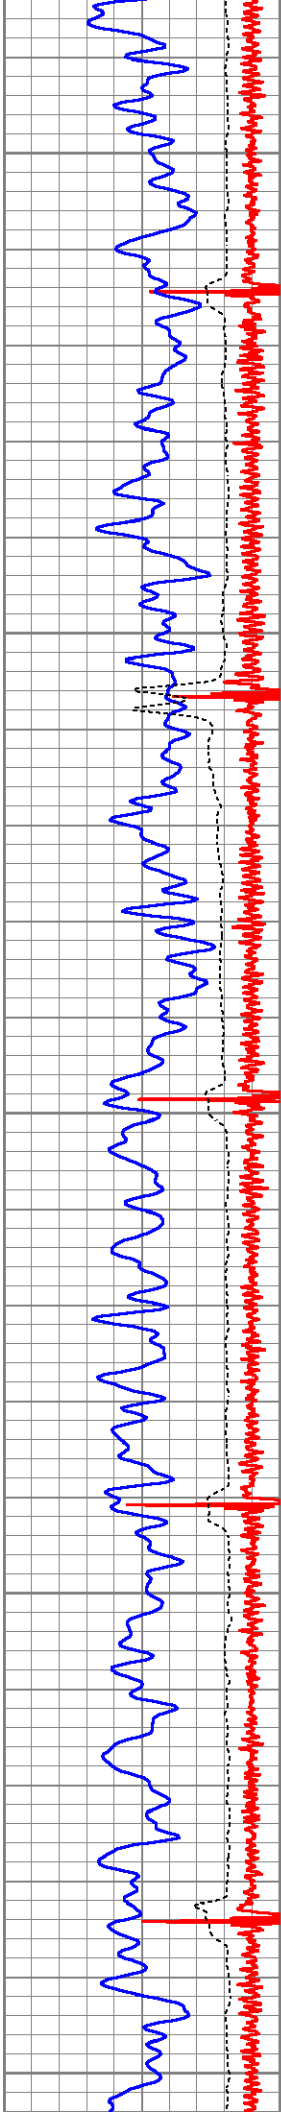





1500


1550


1600


1650


1700

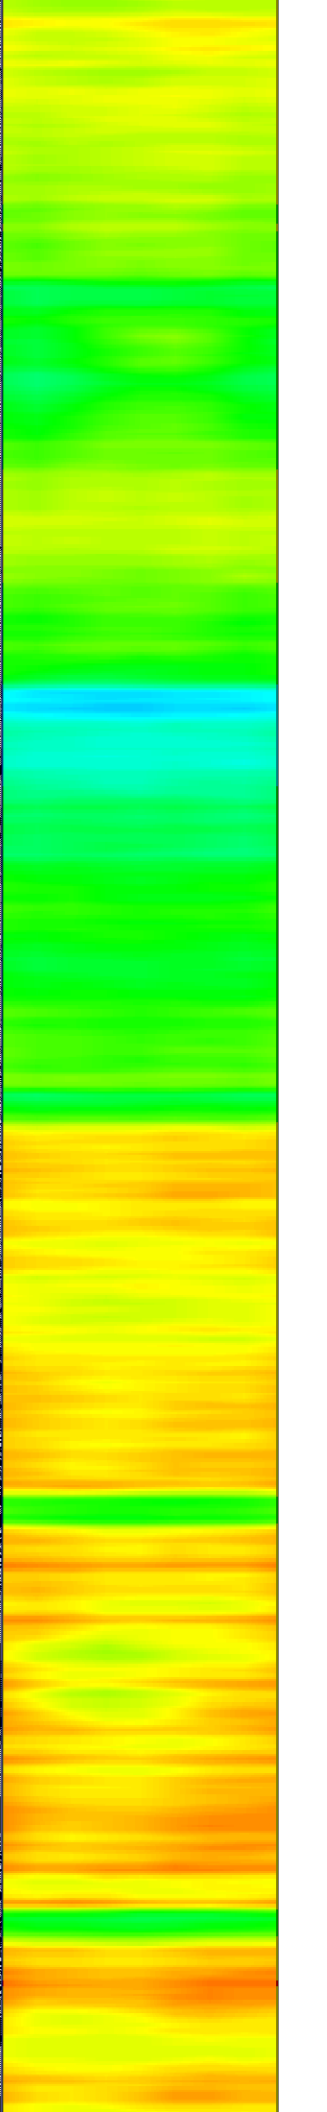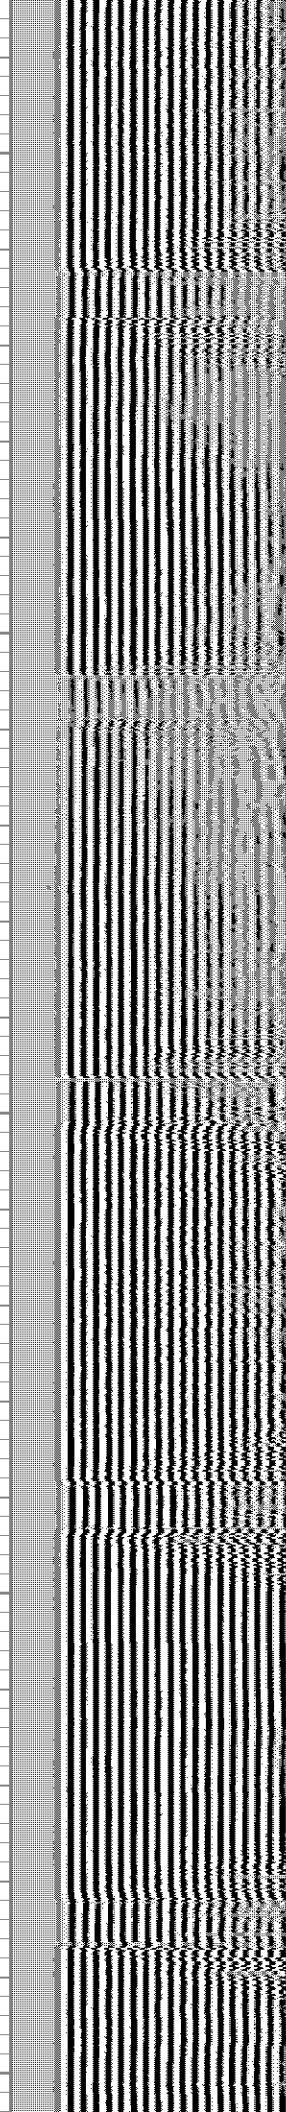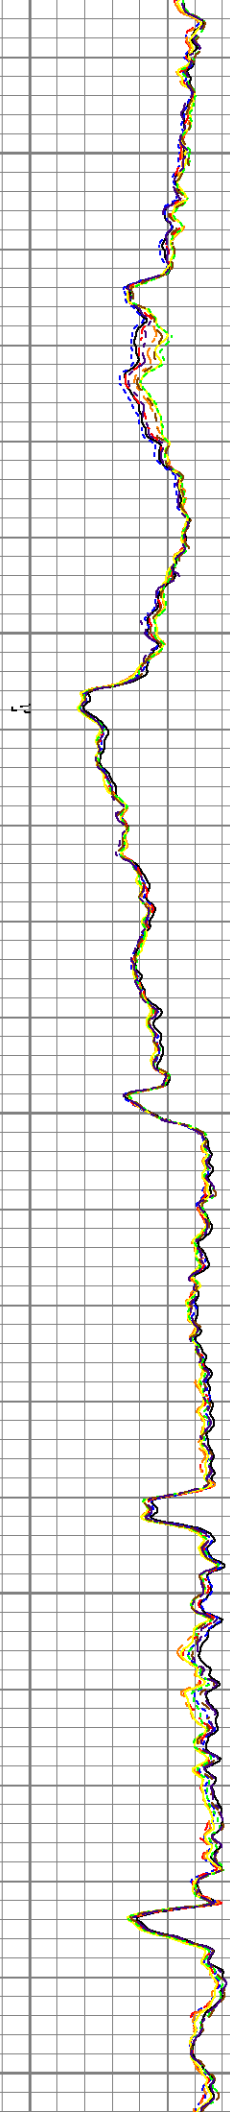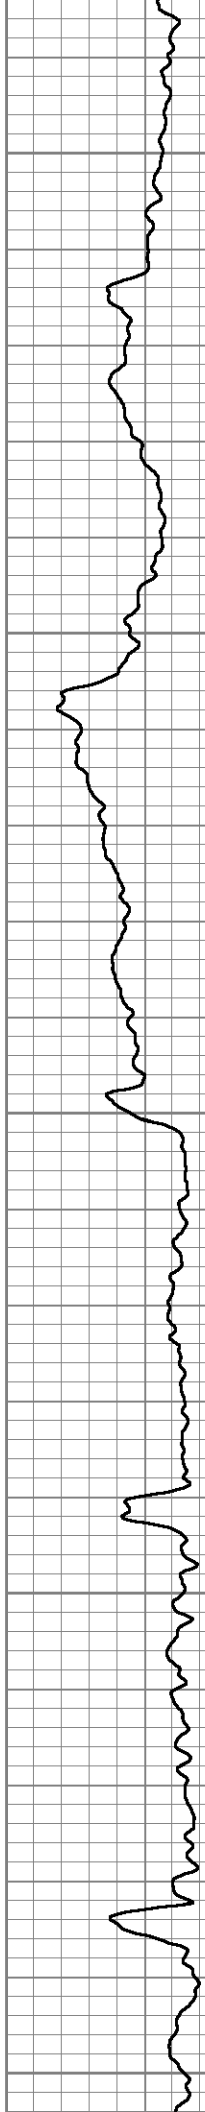


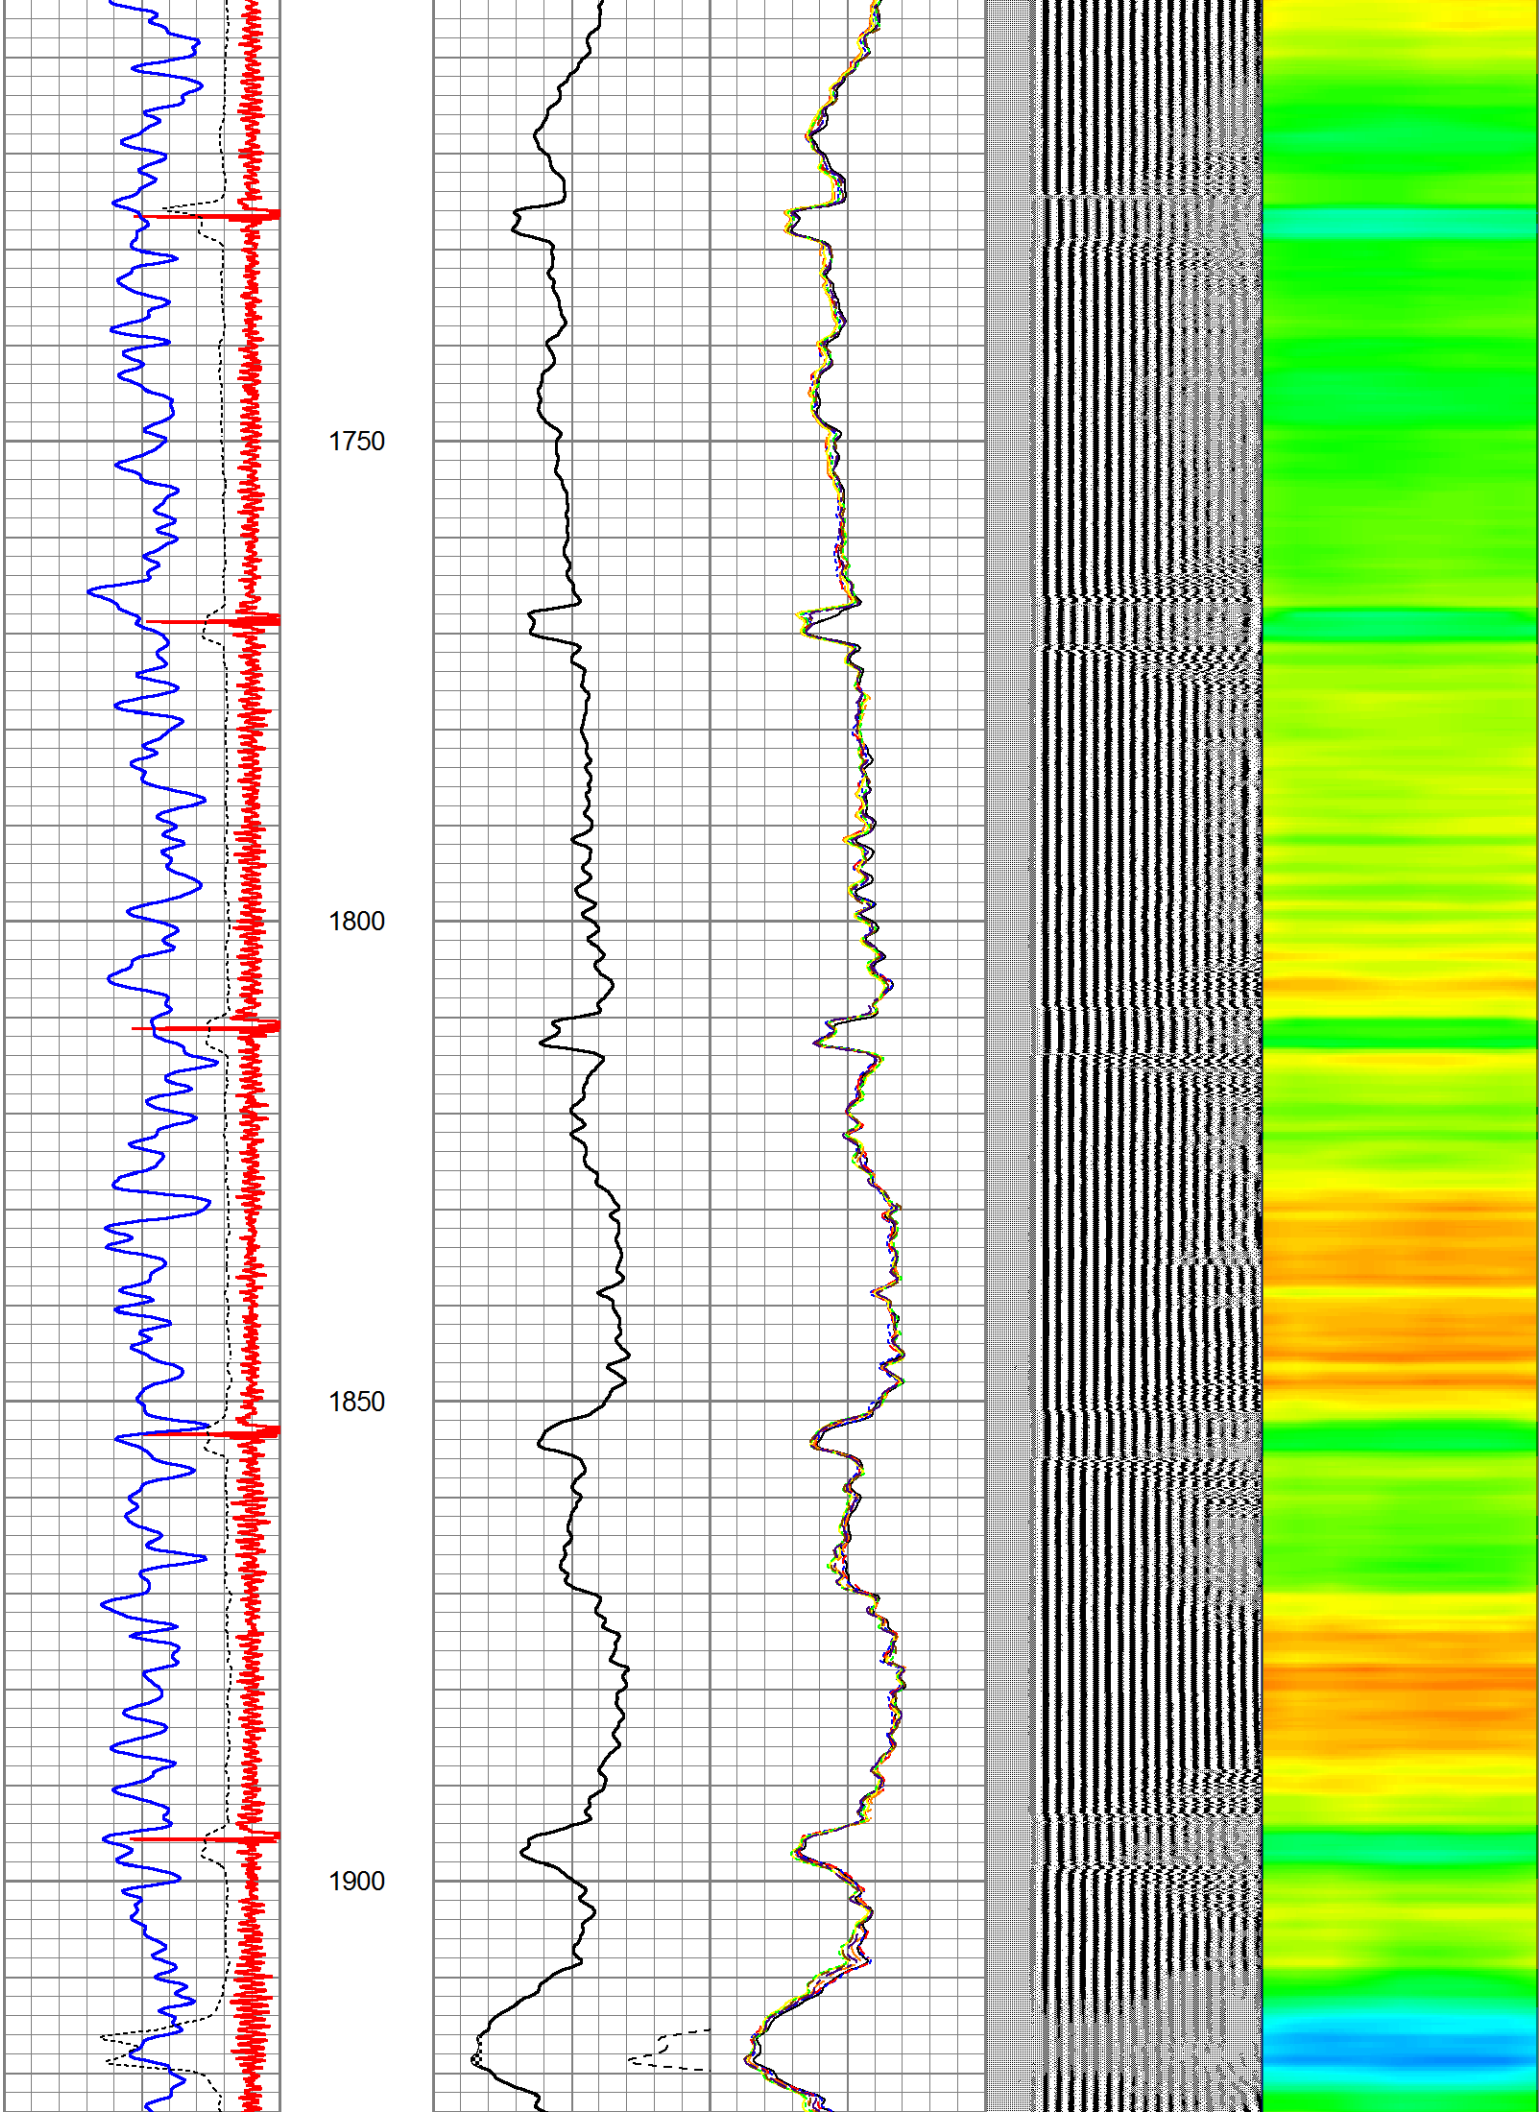


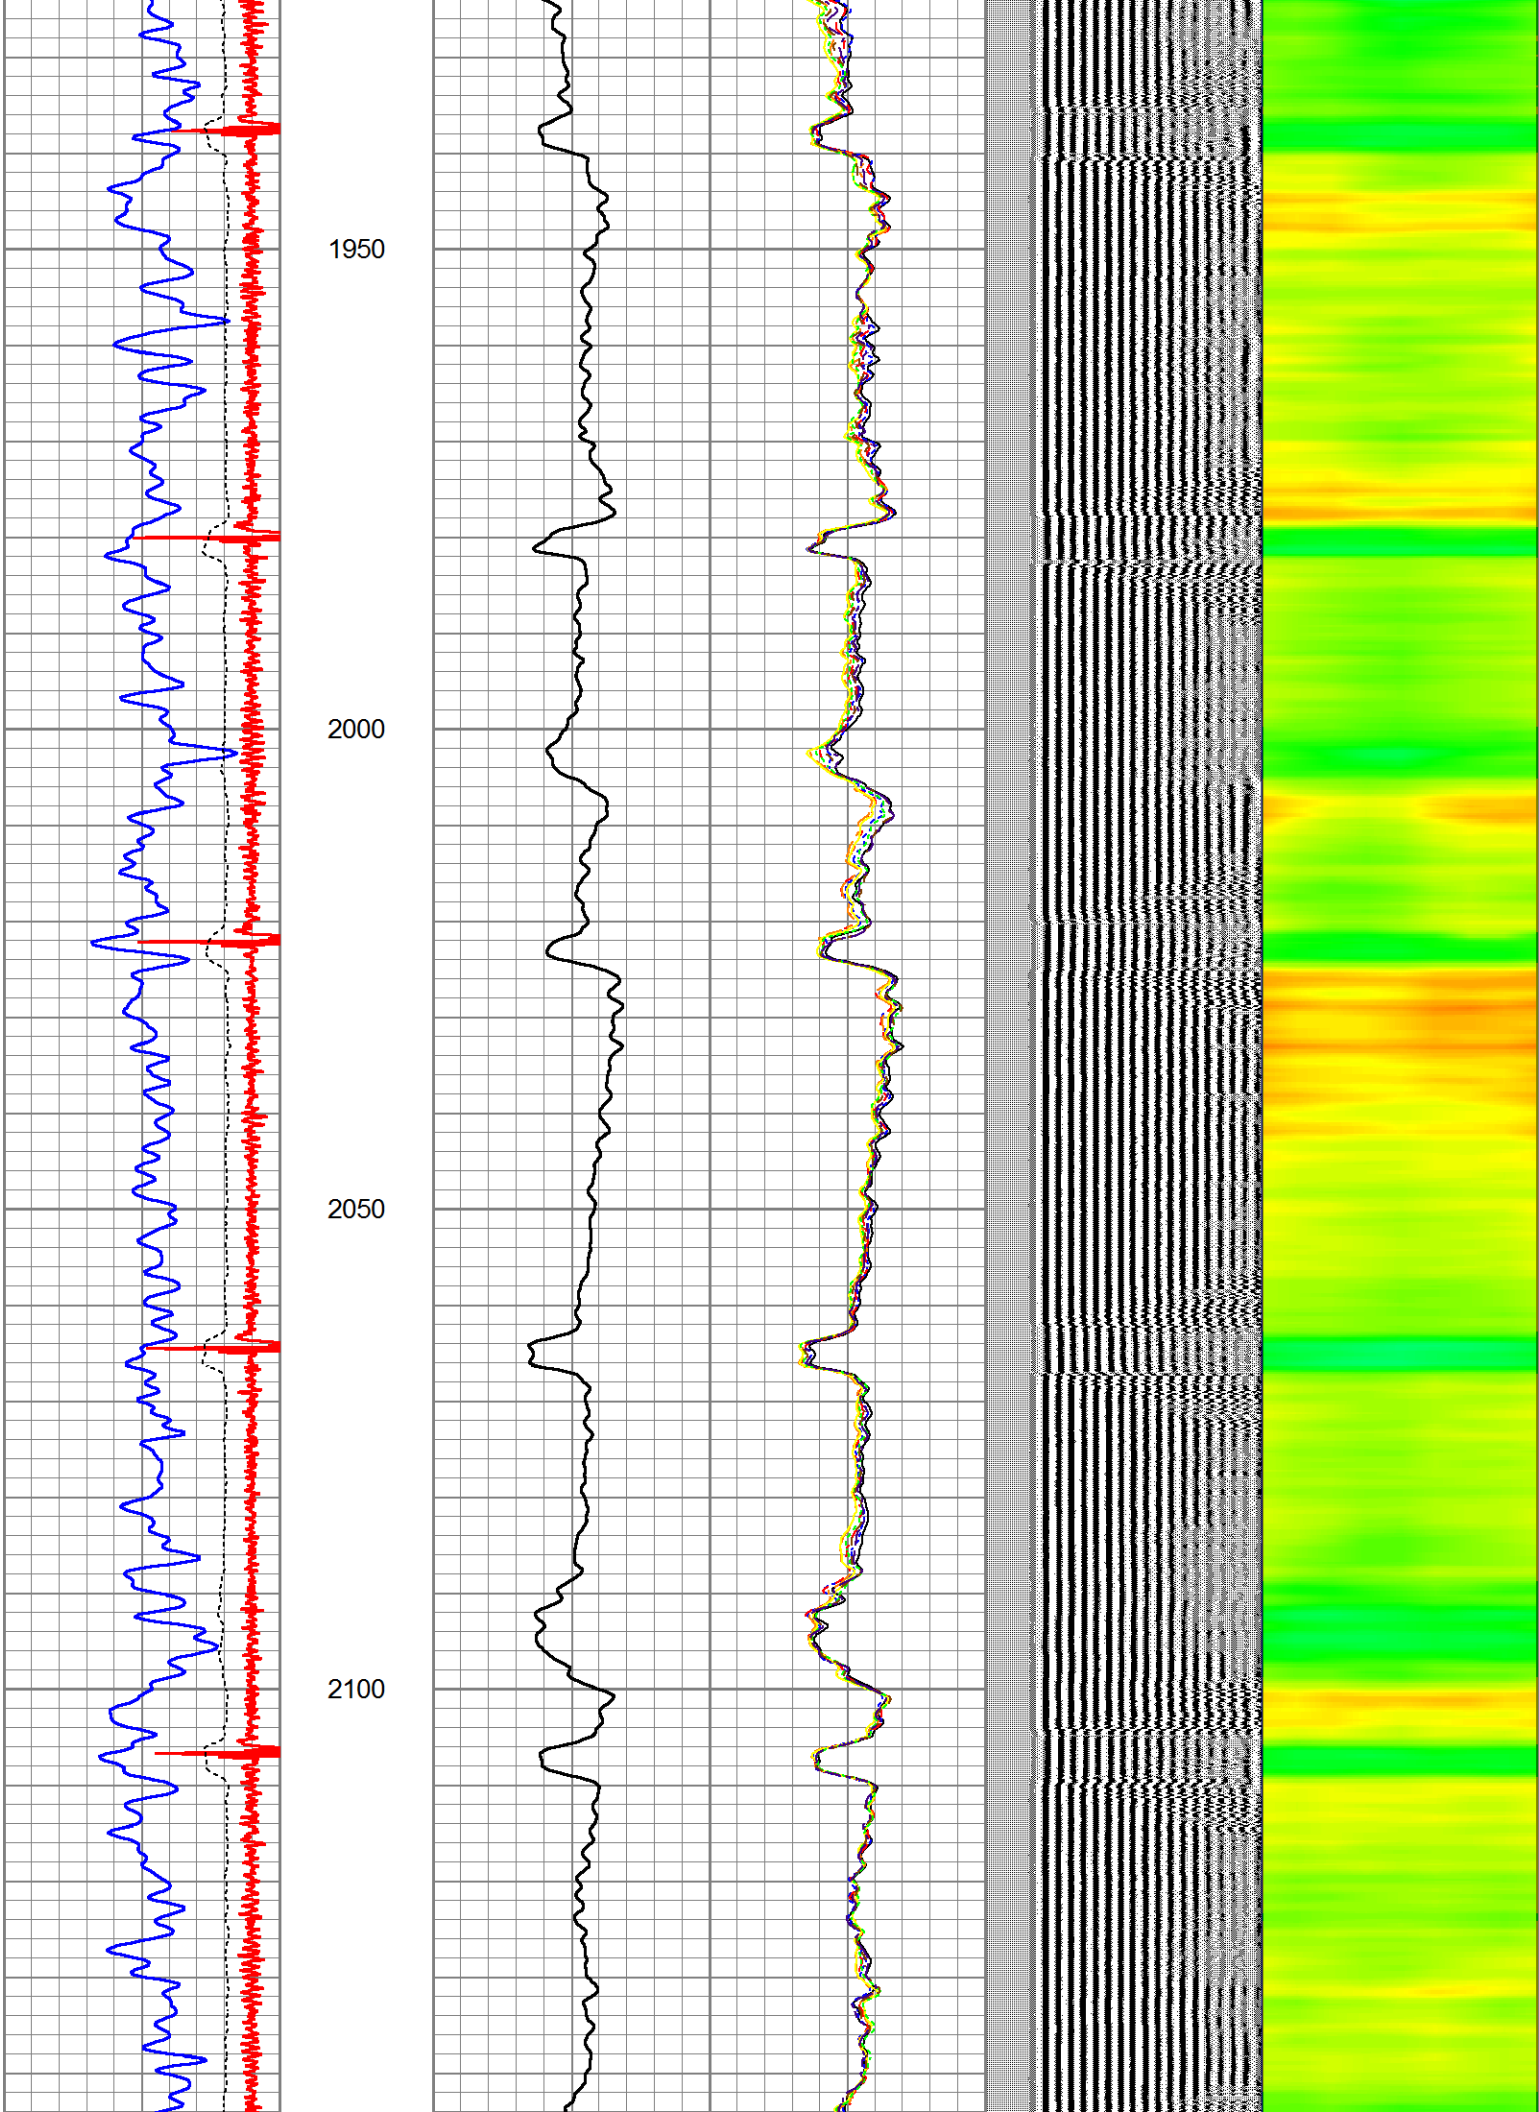


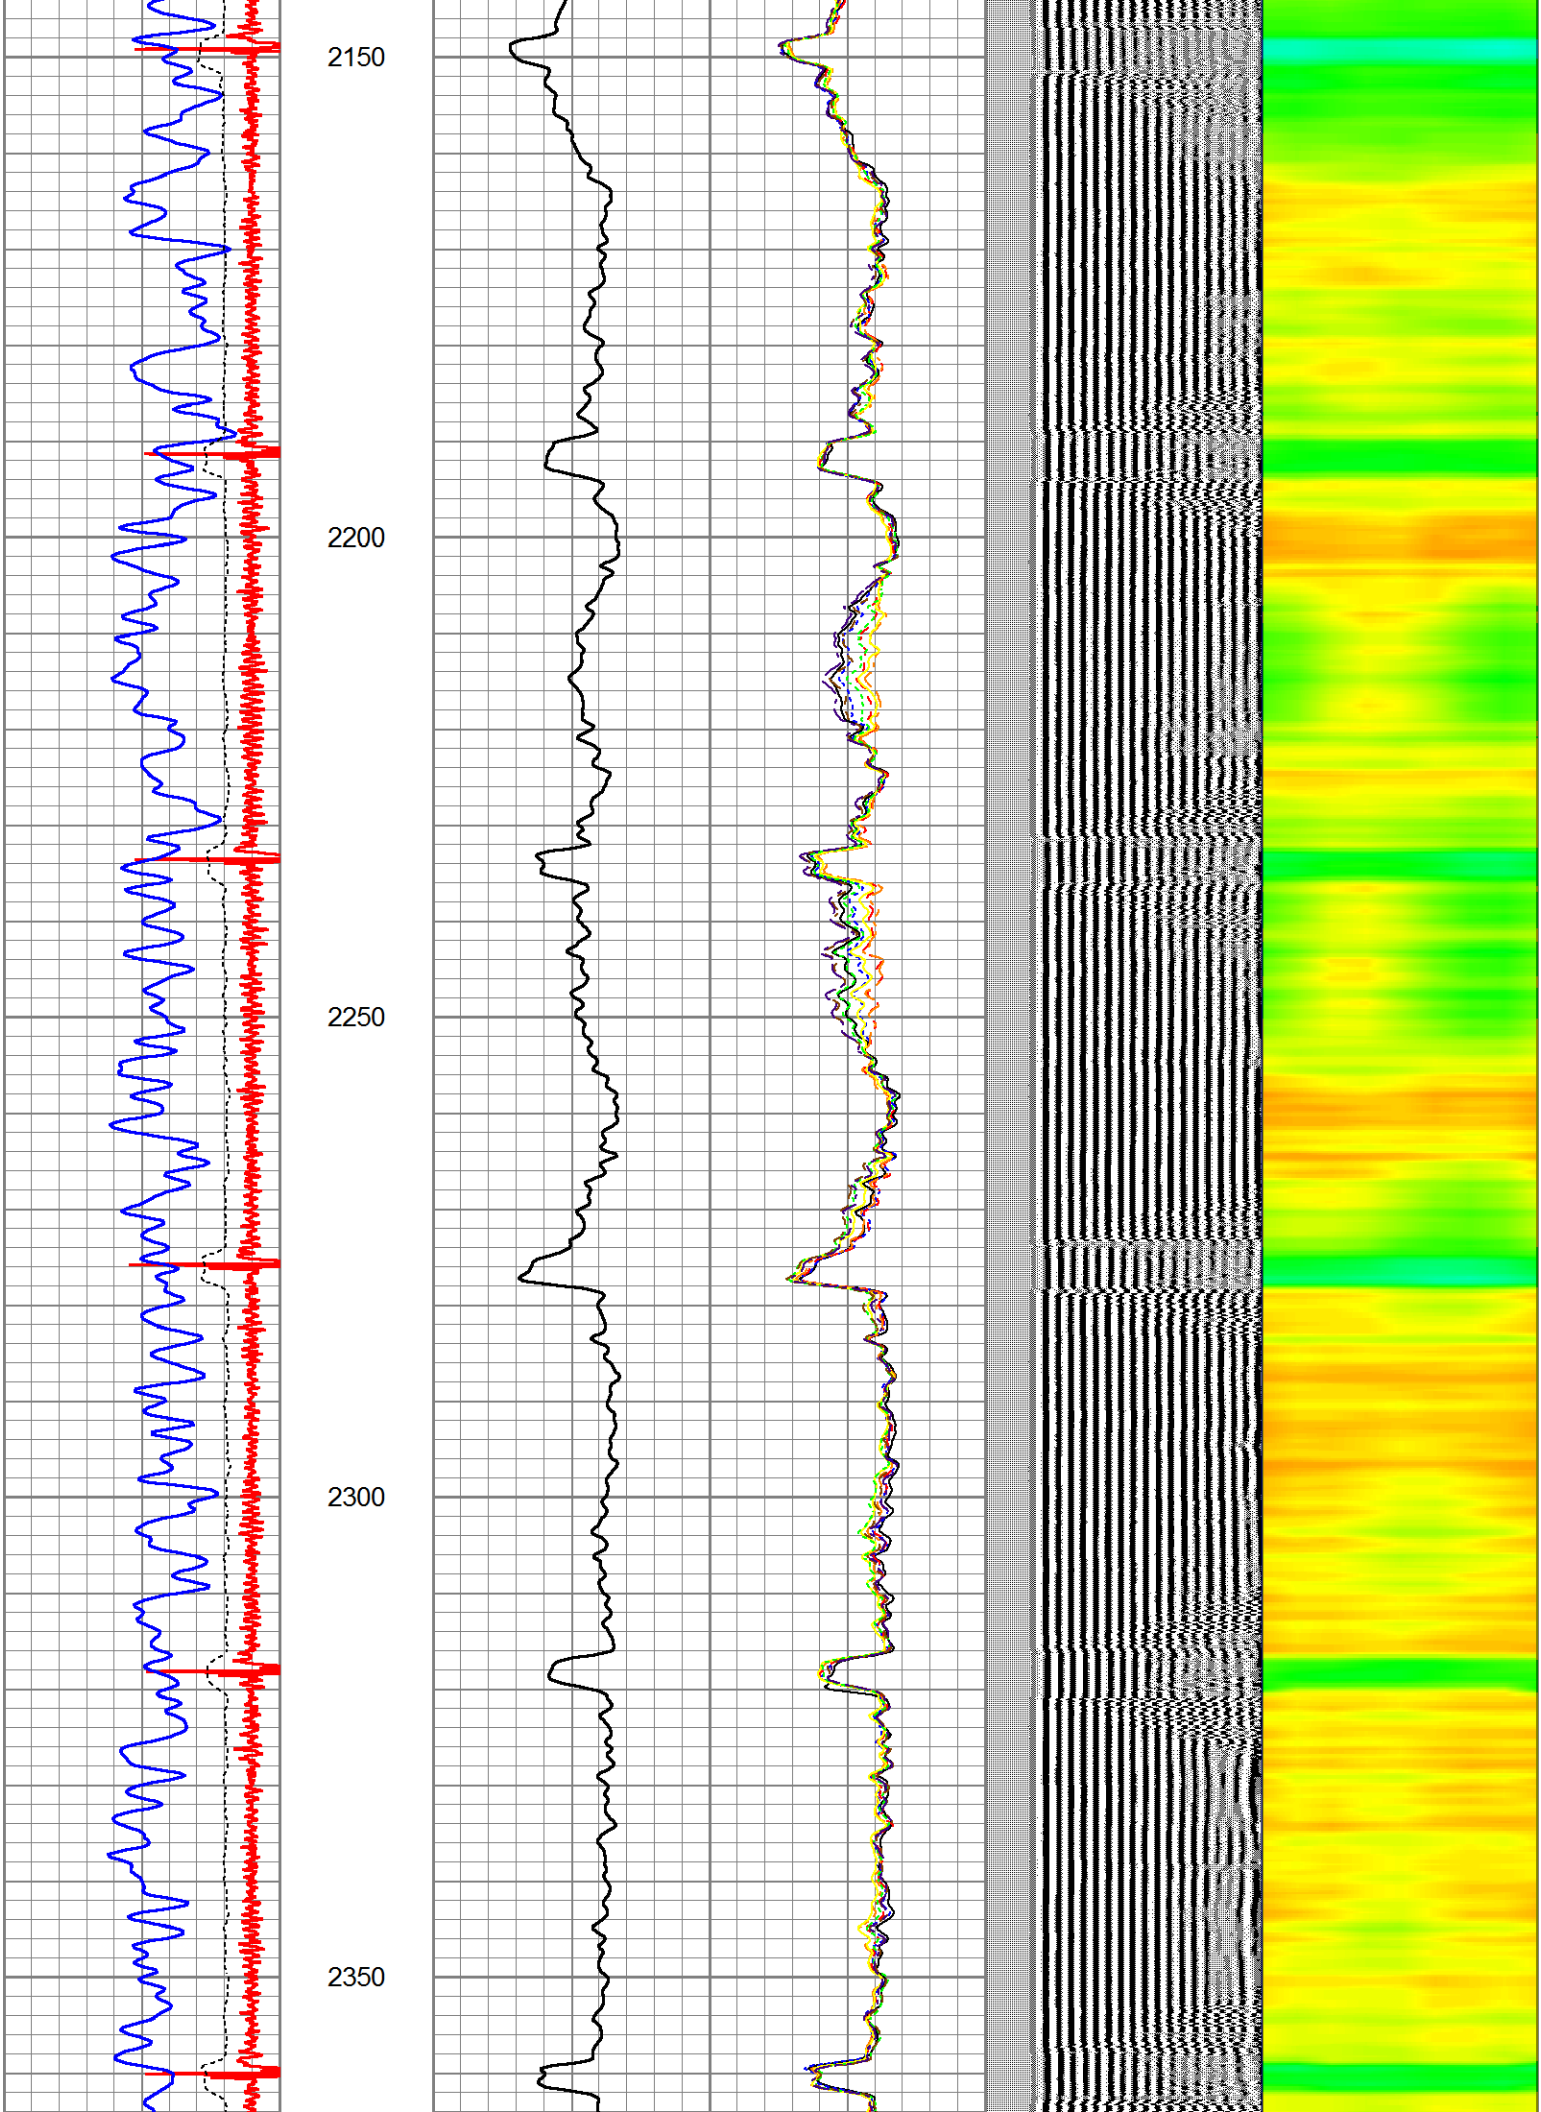


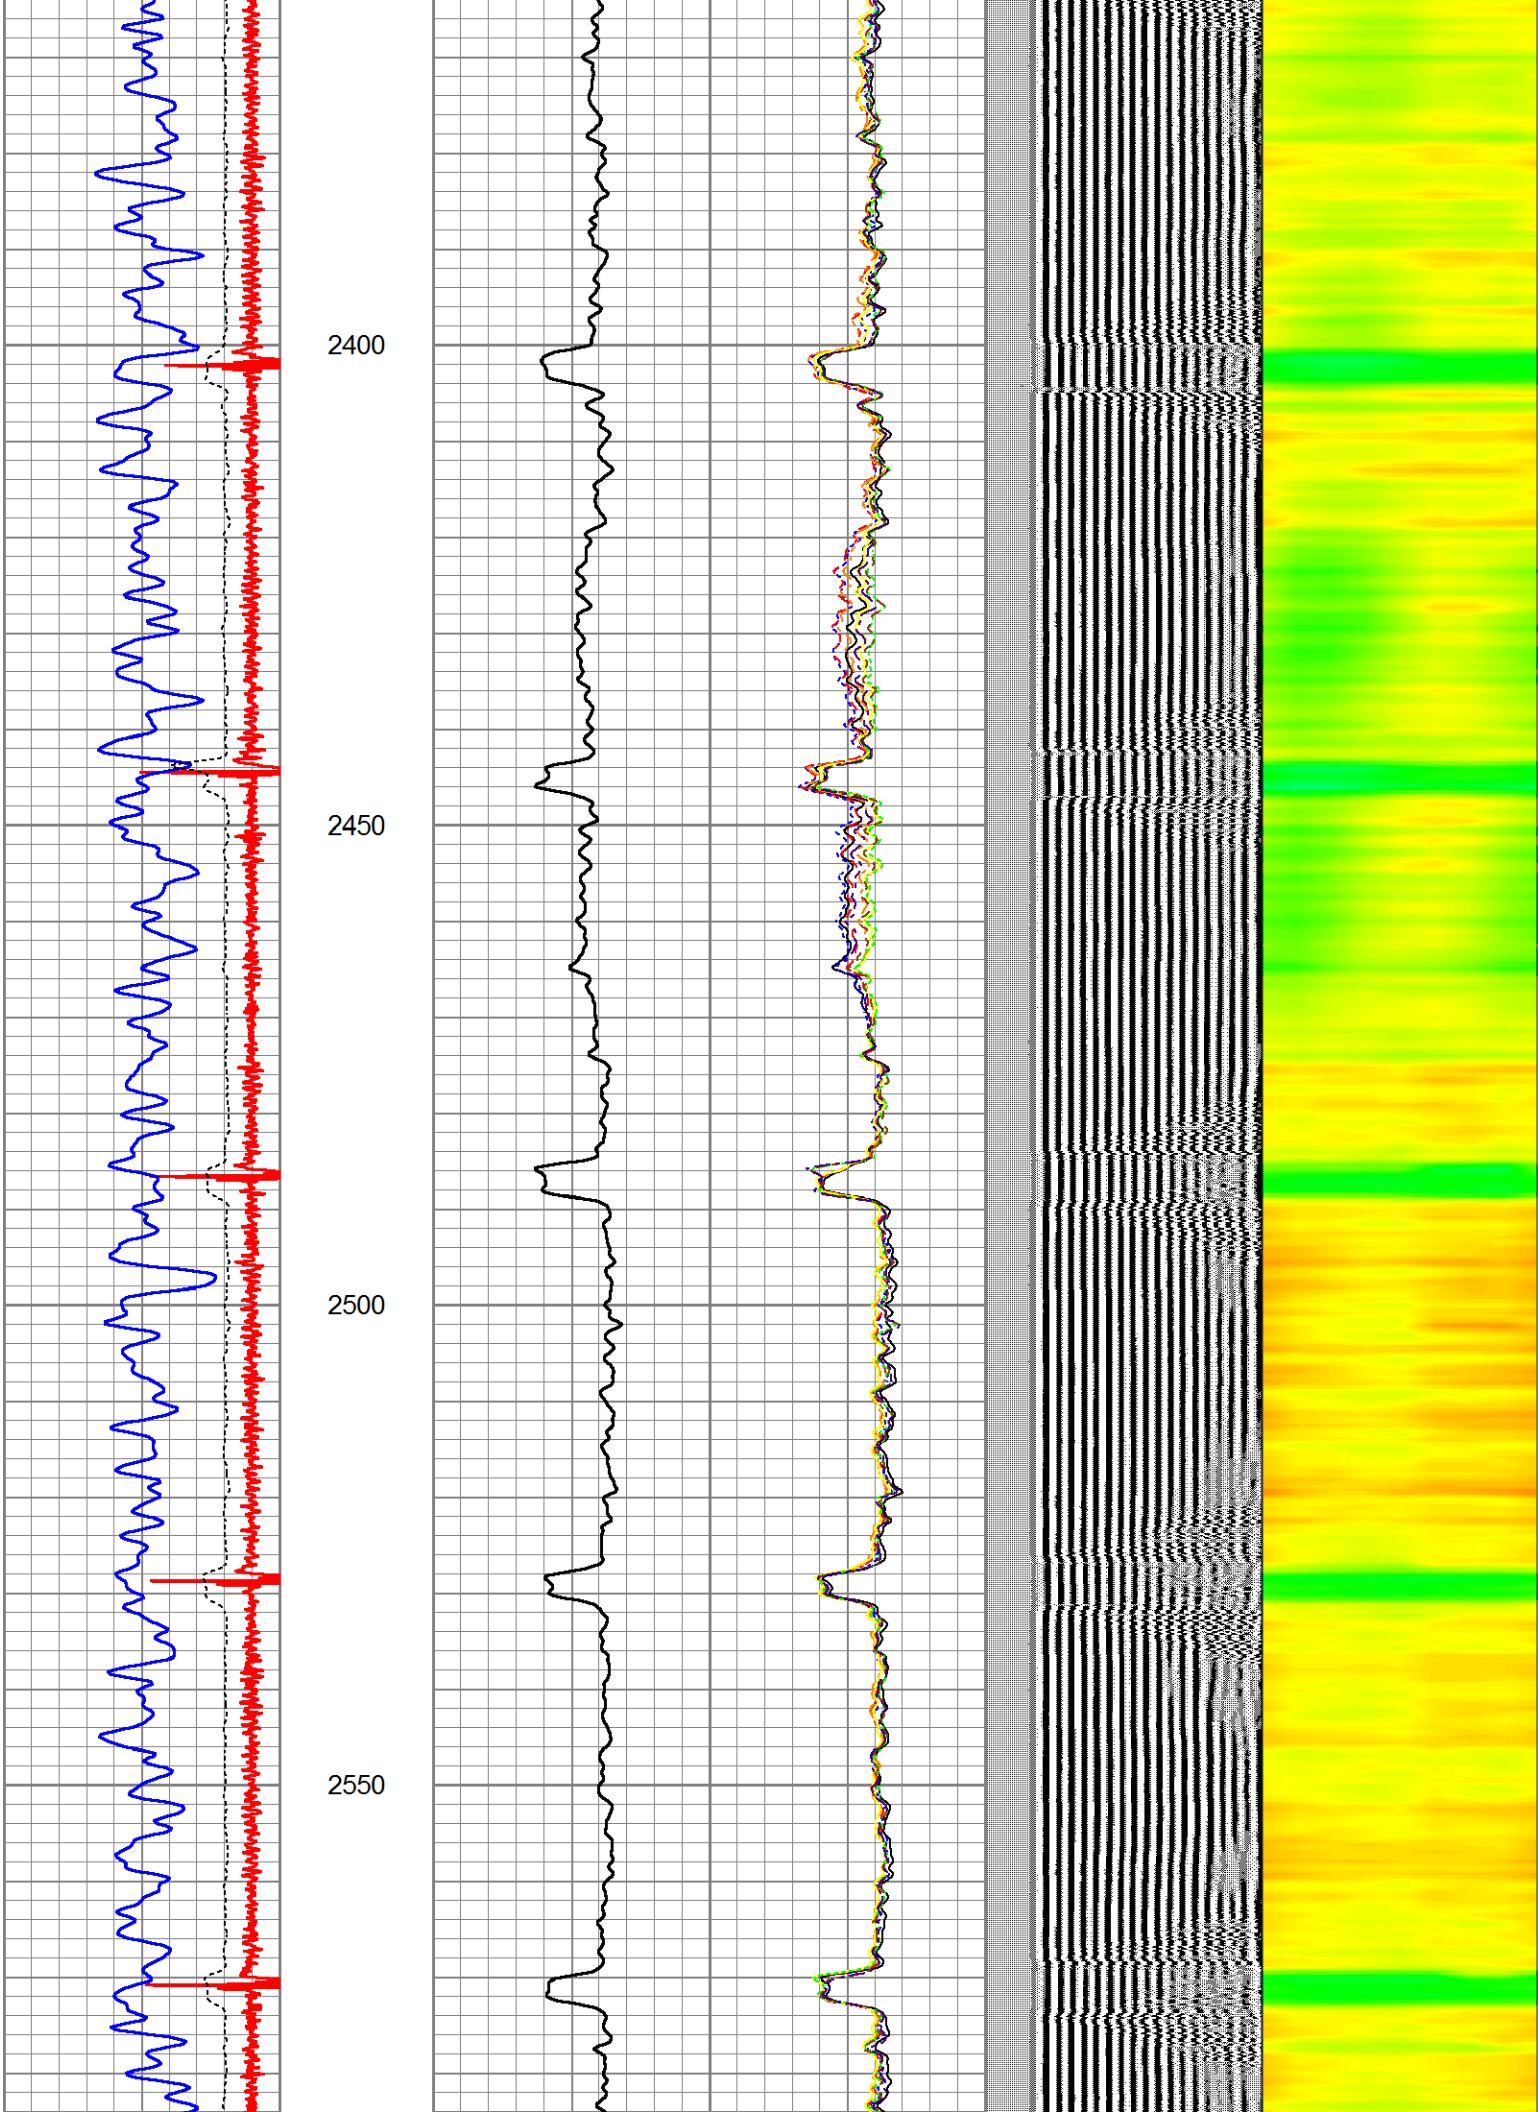


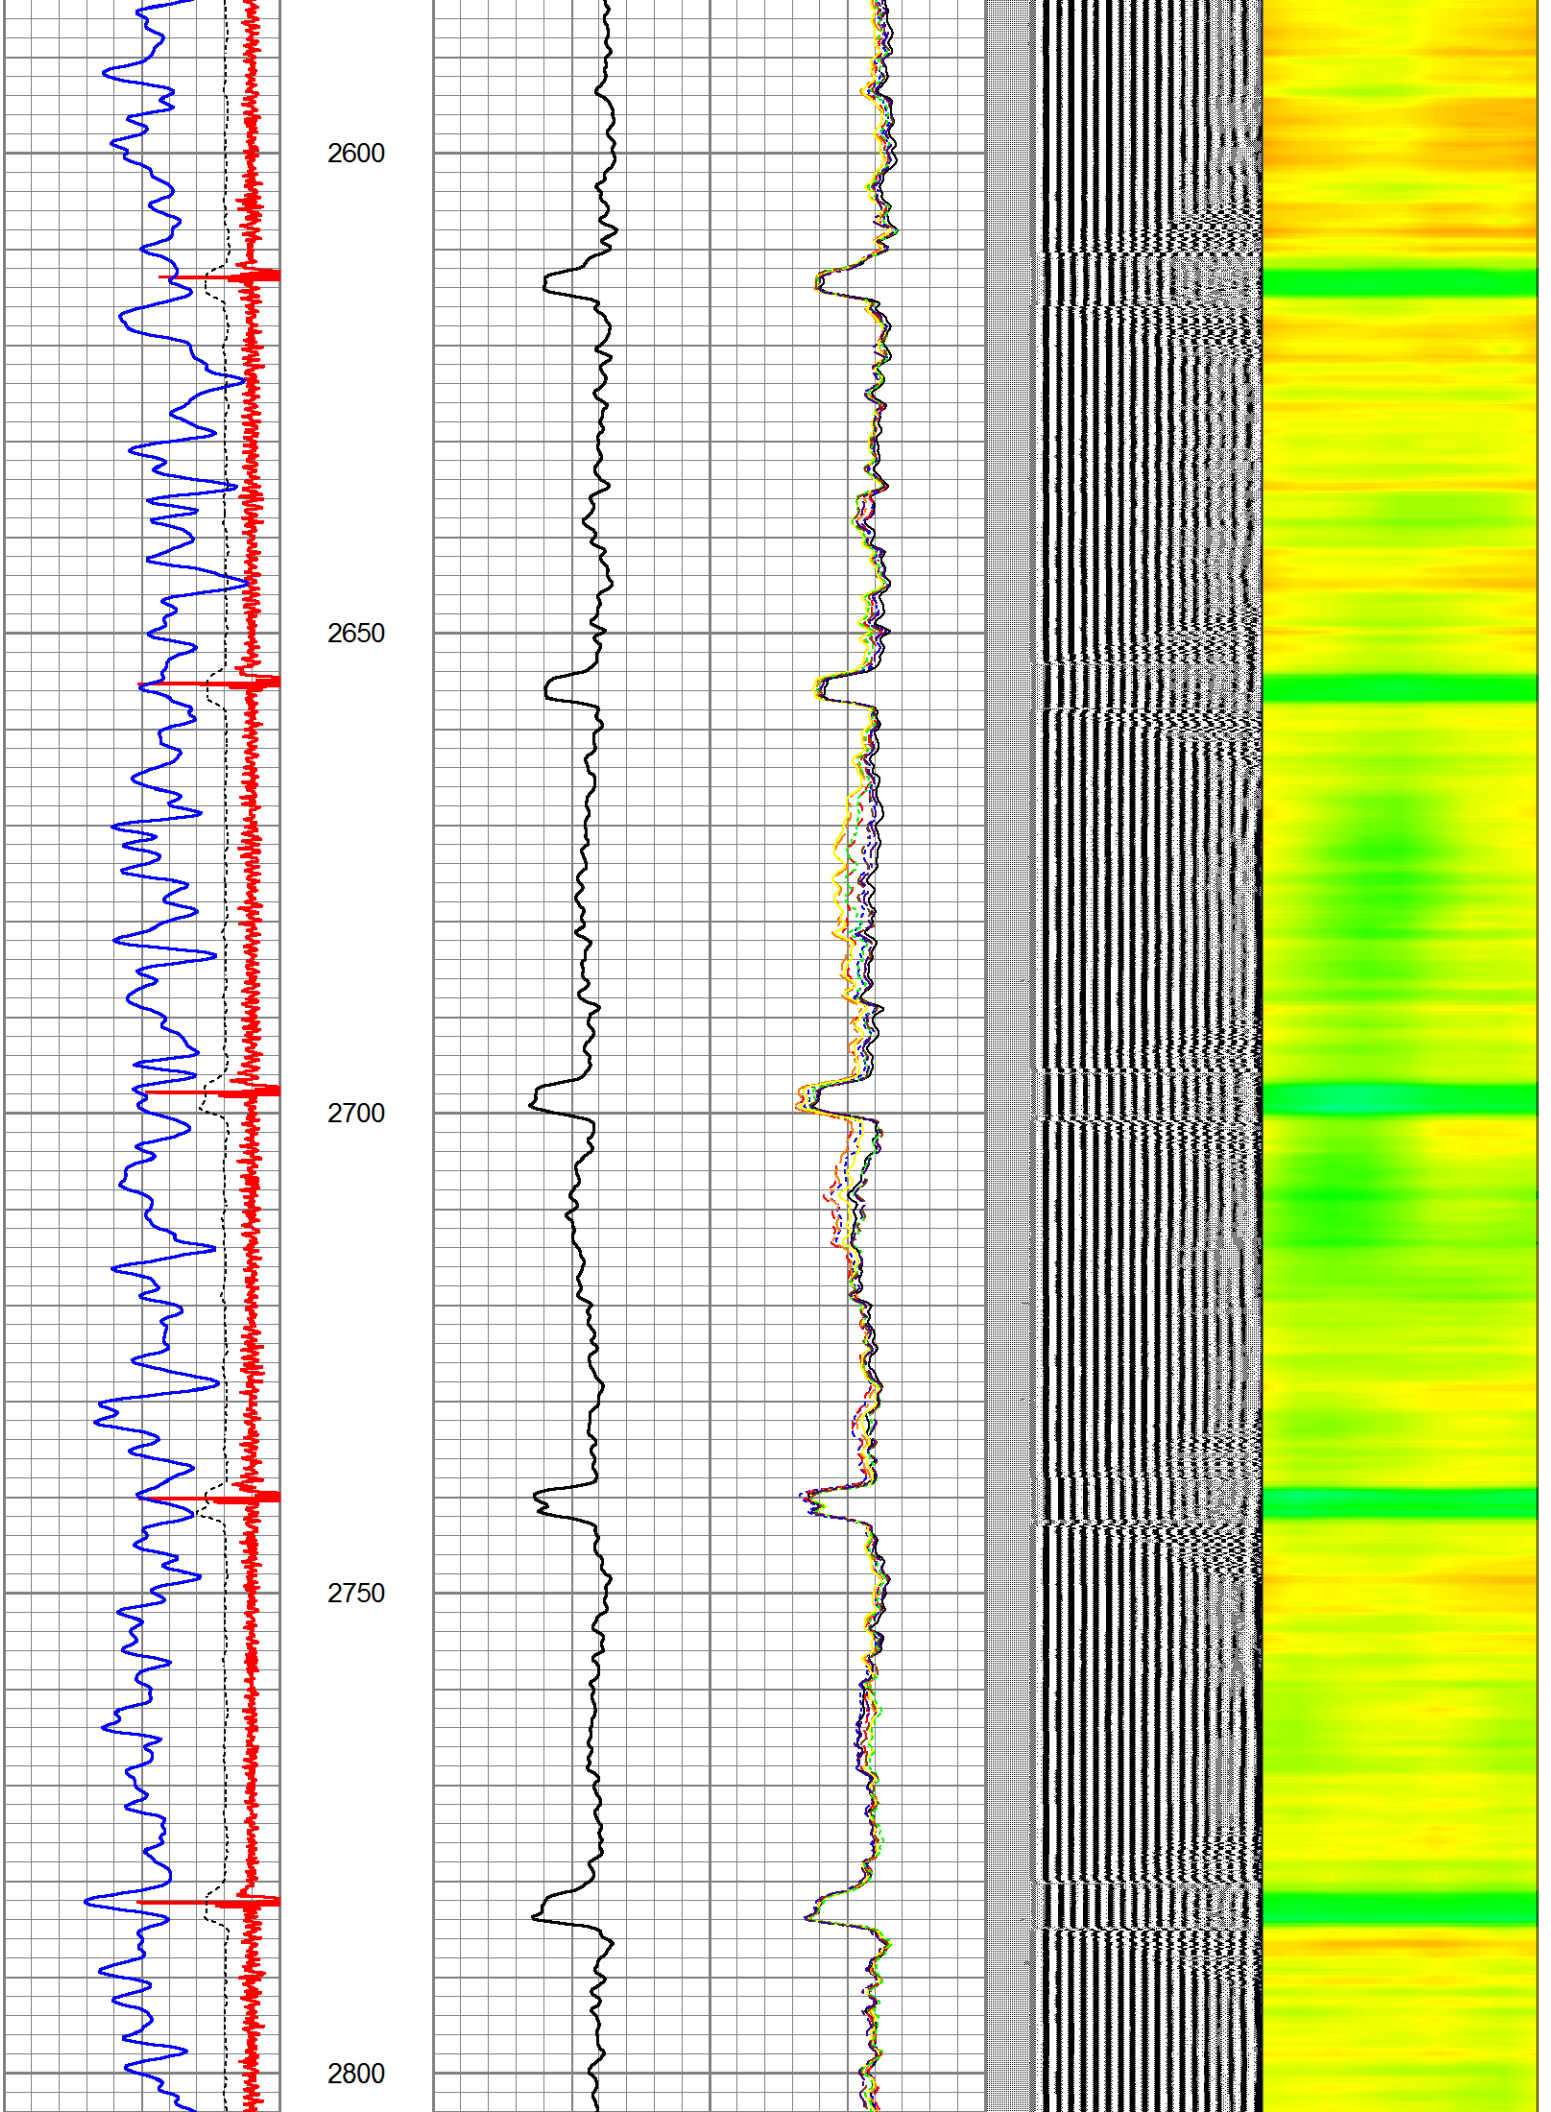


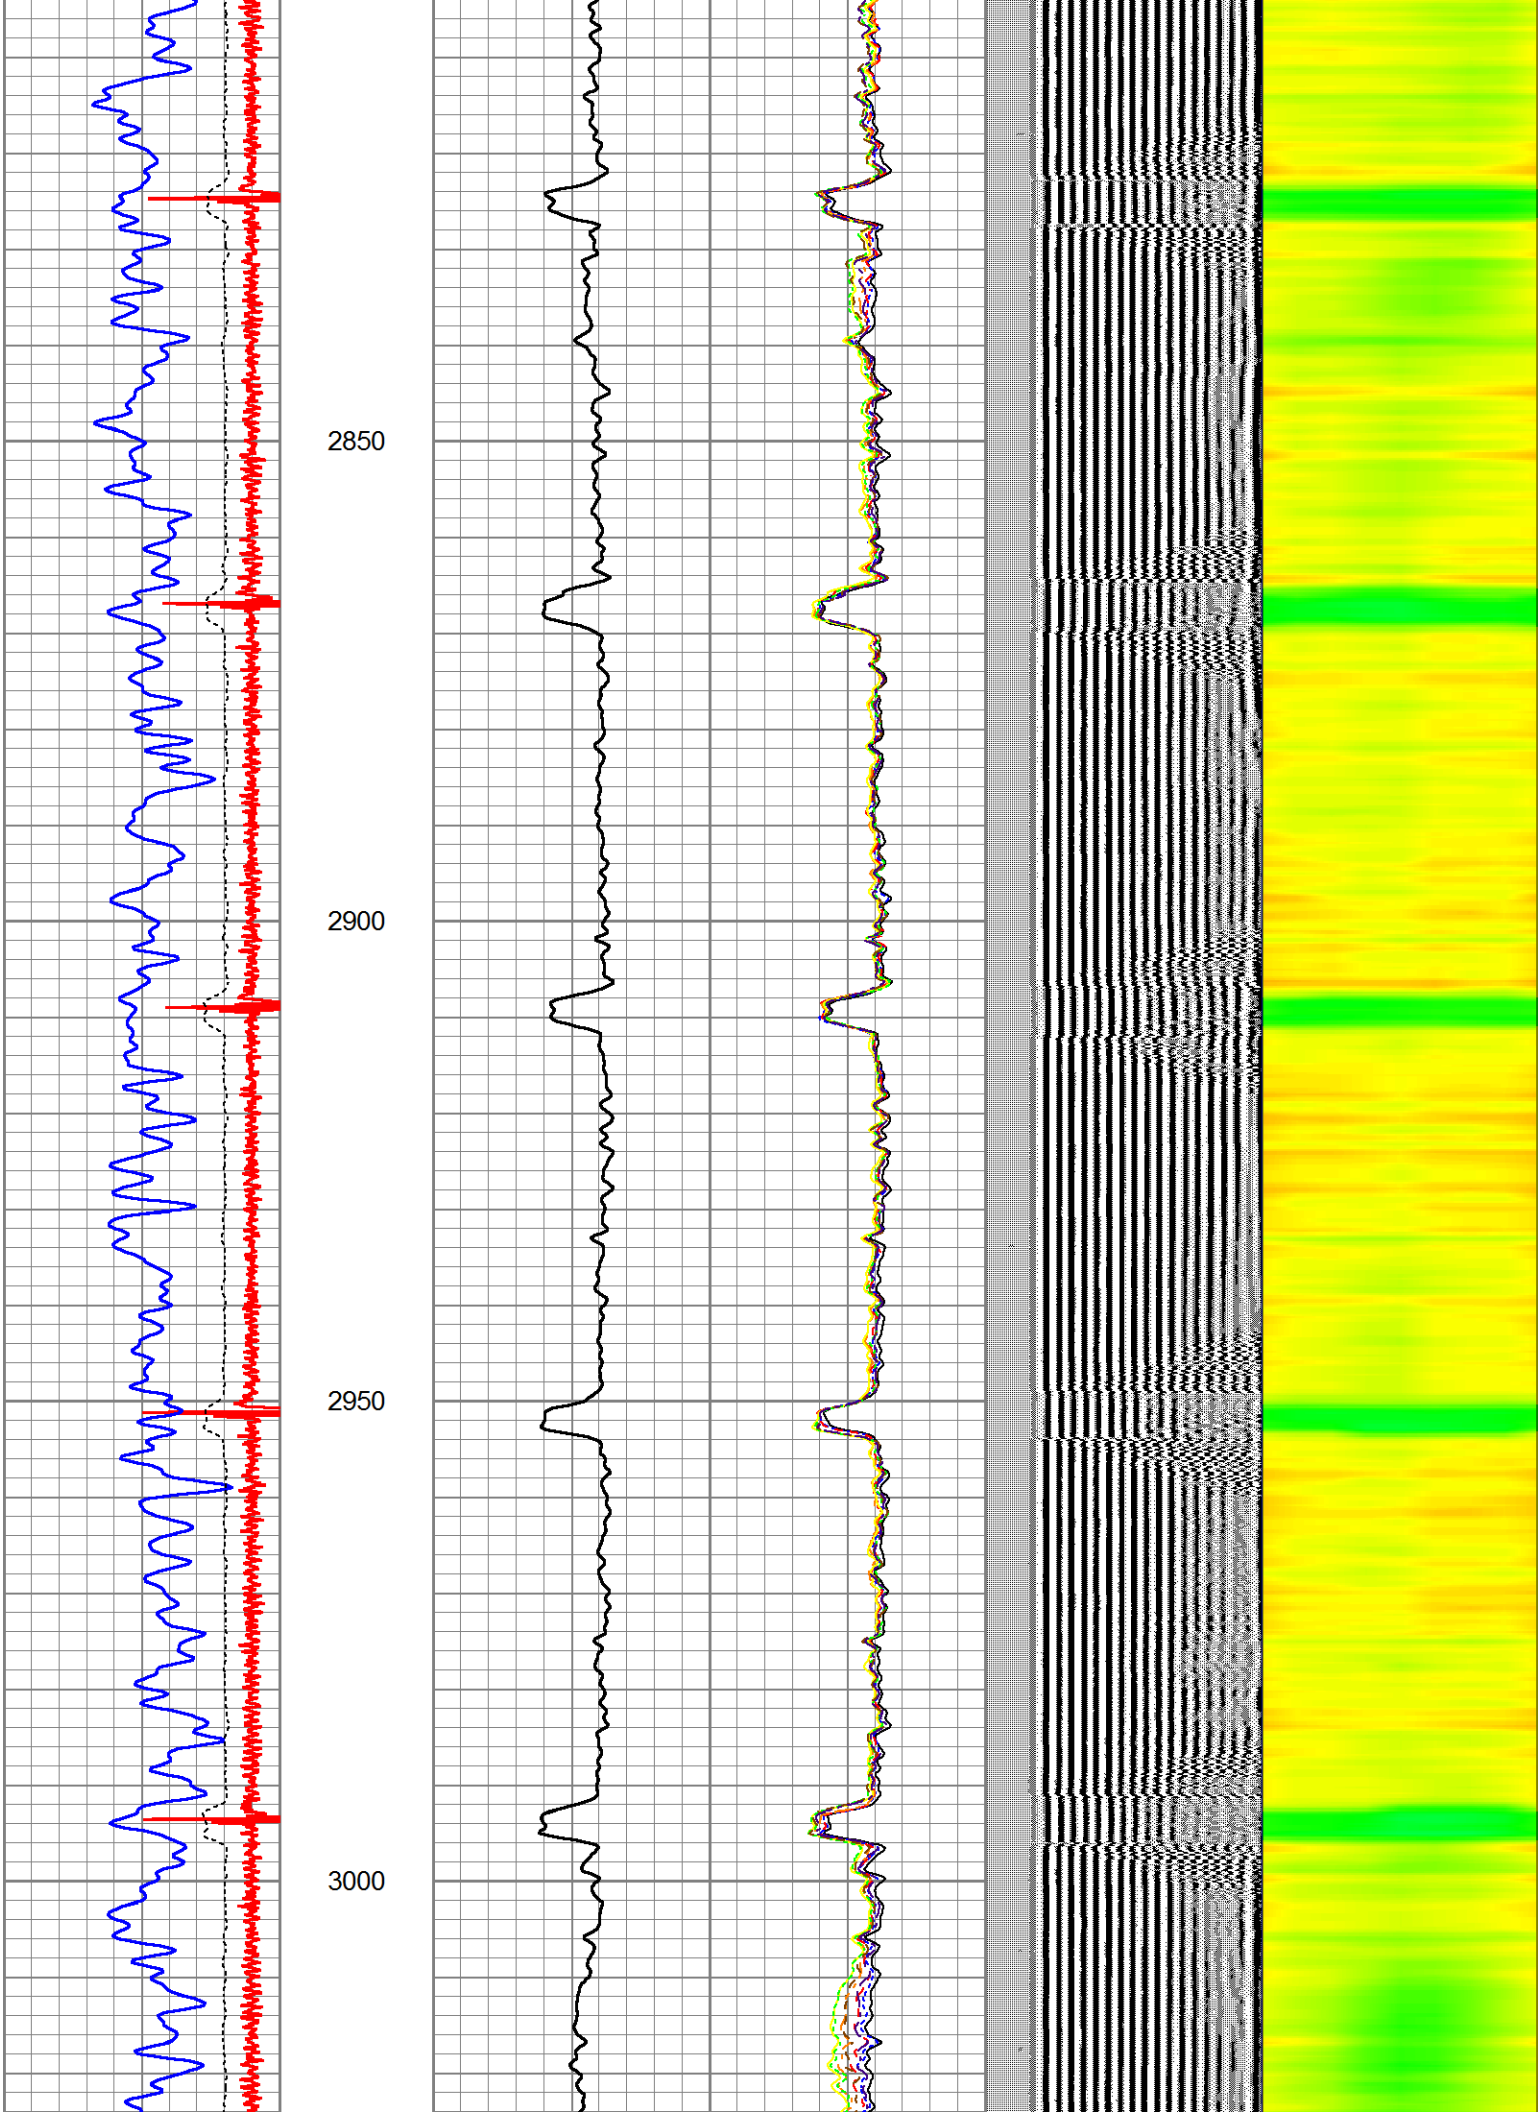


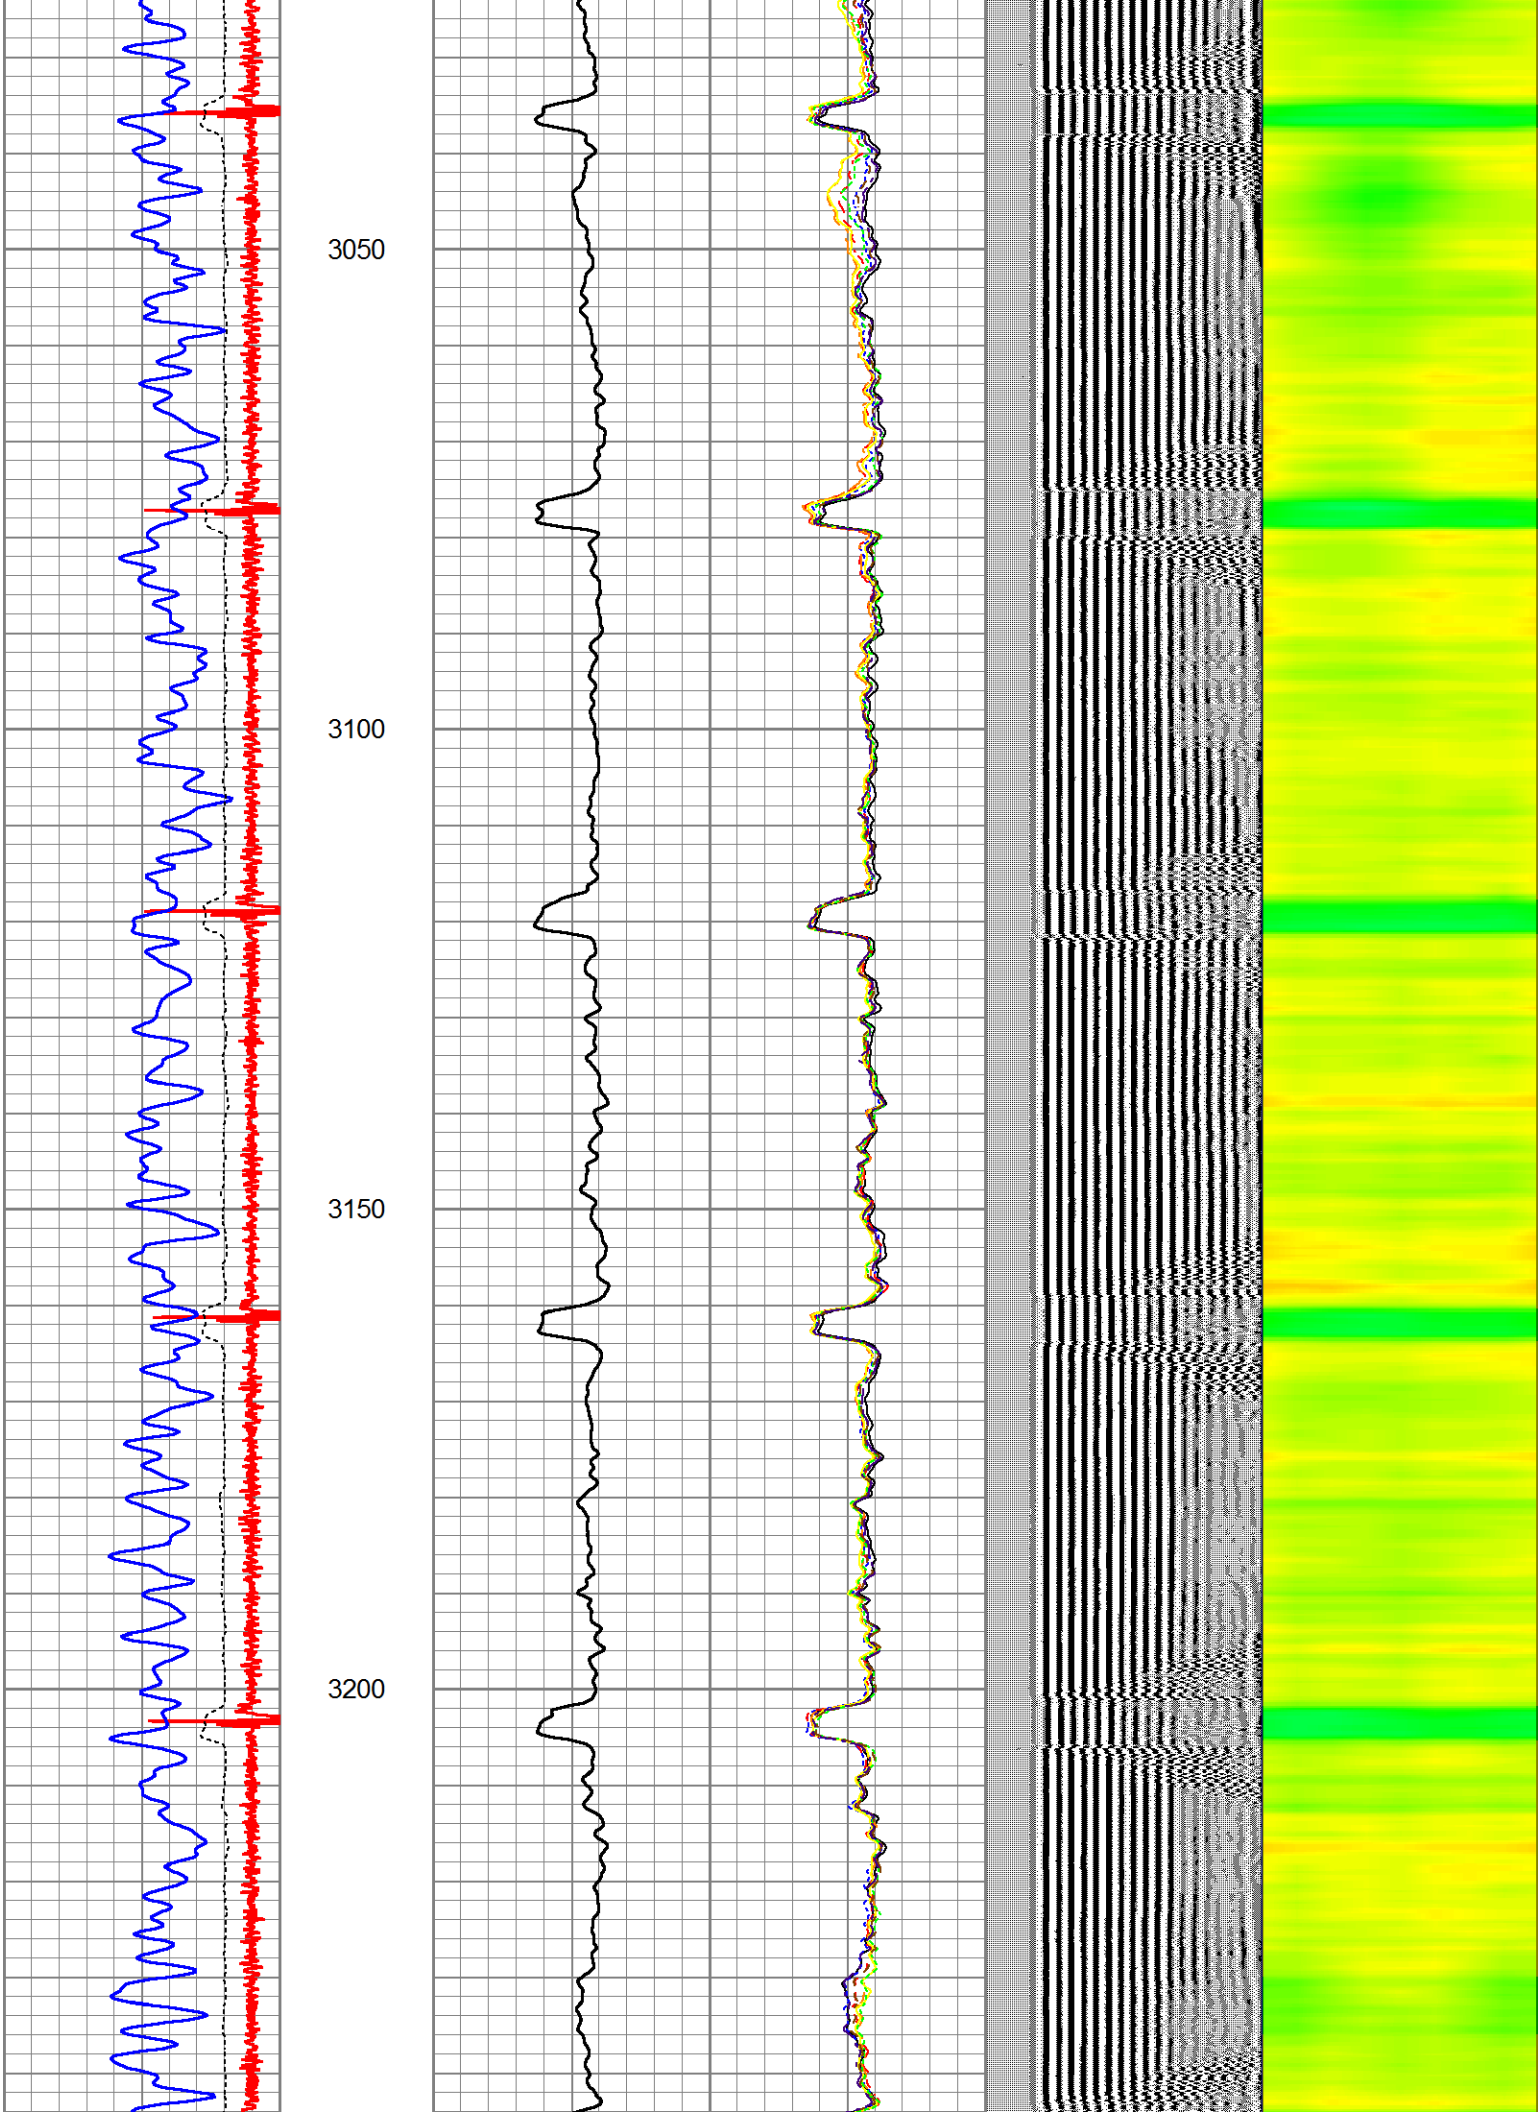

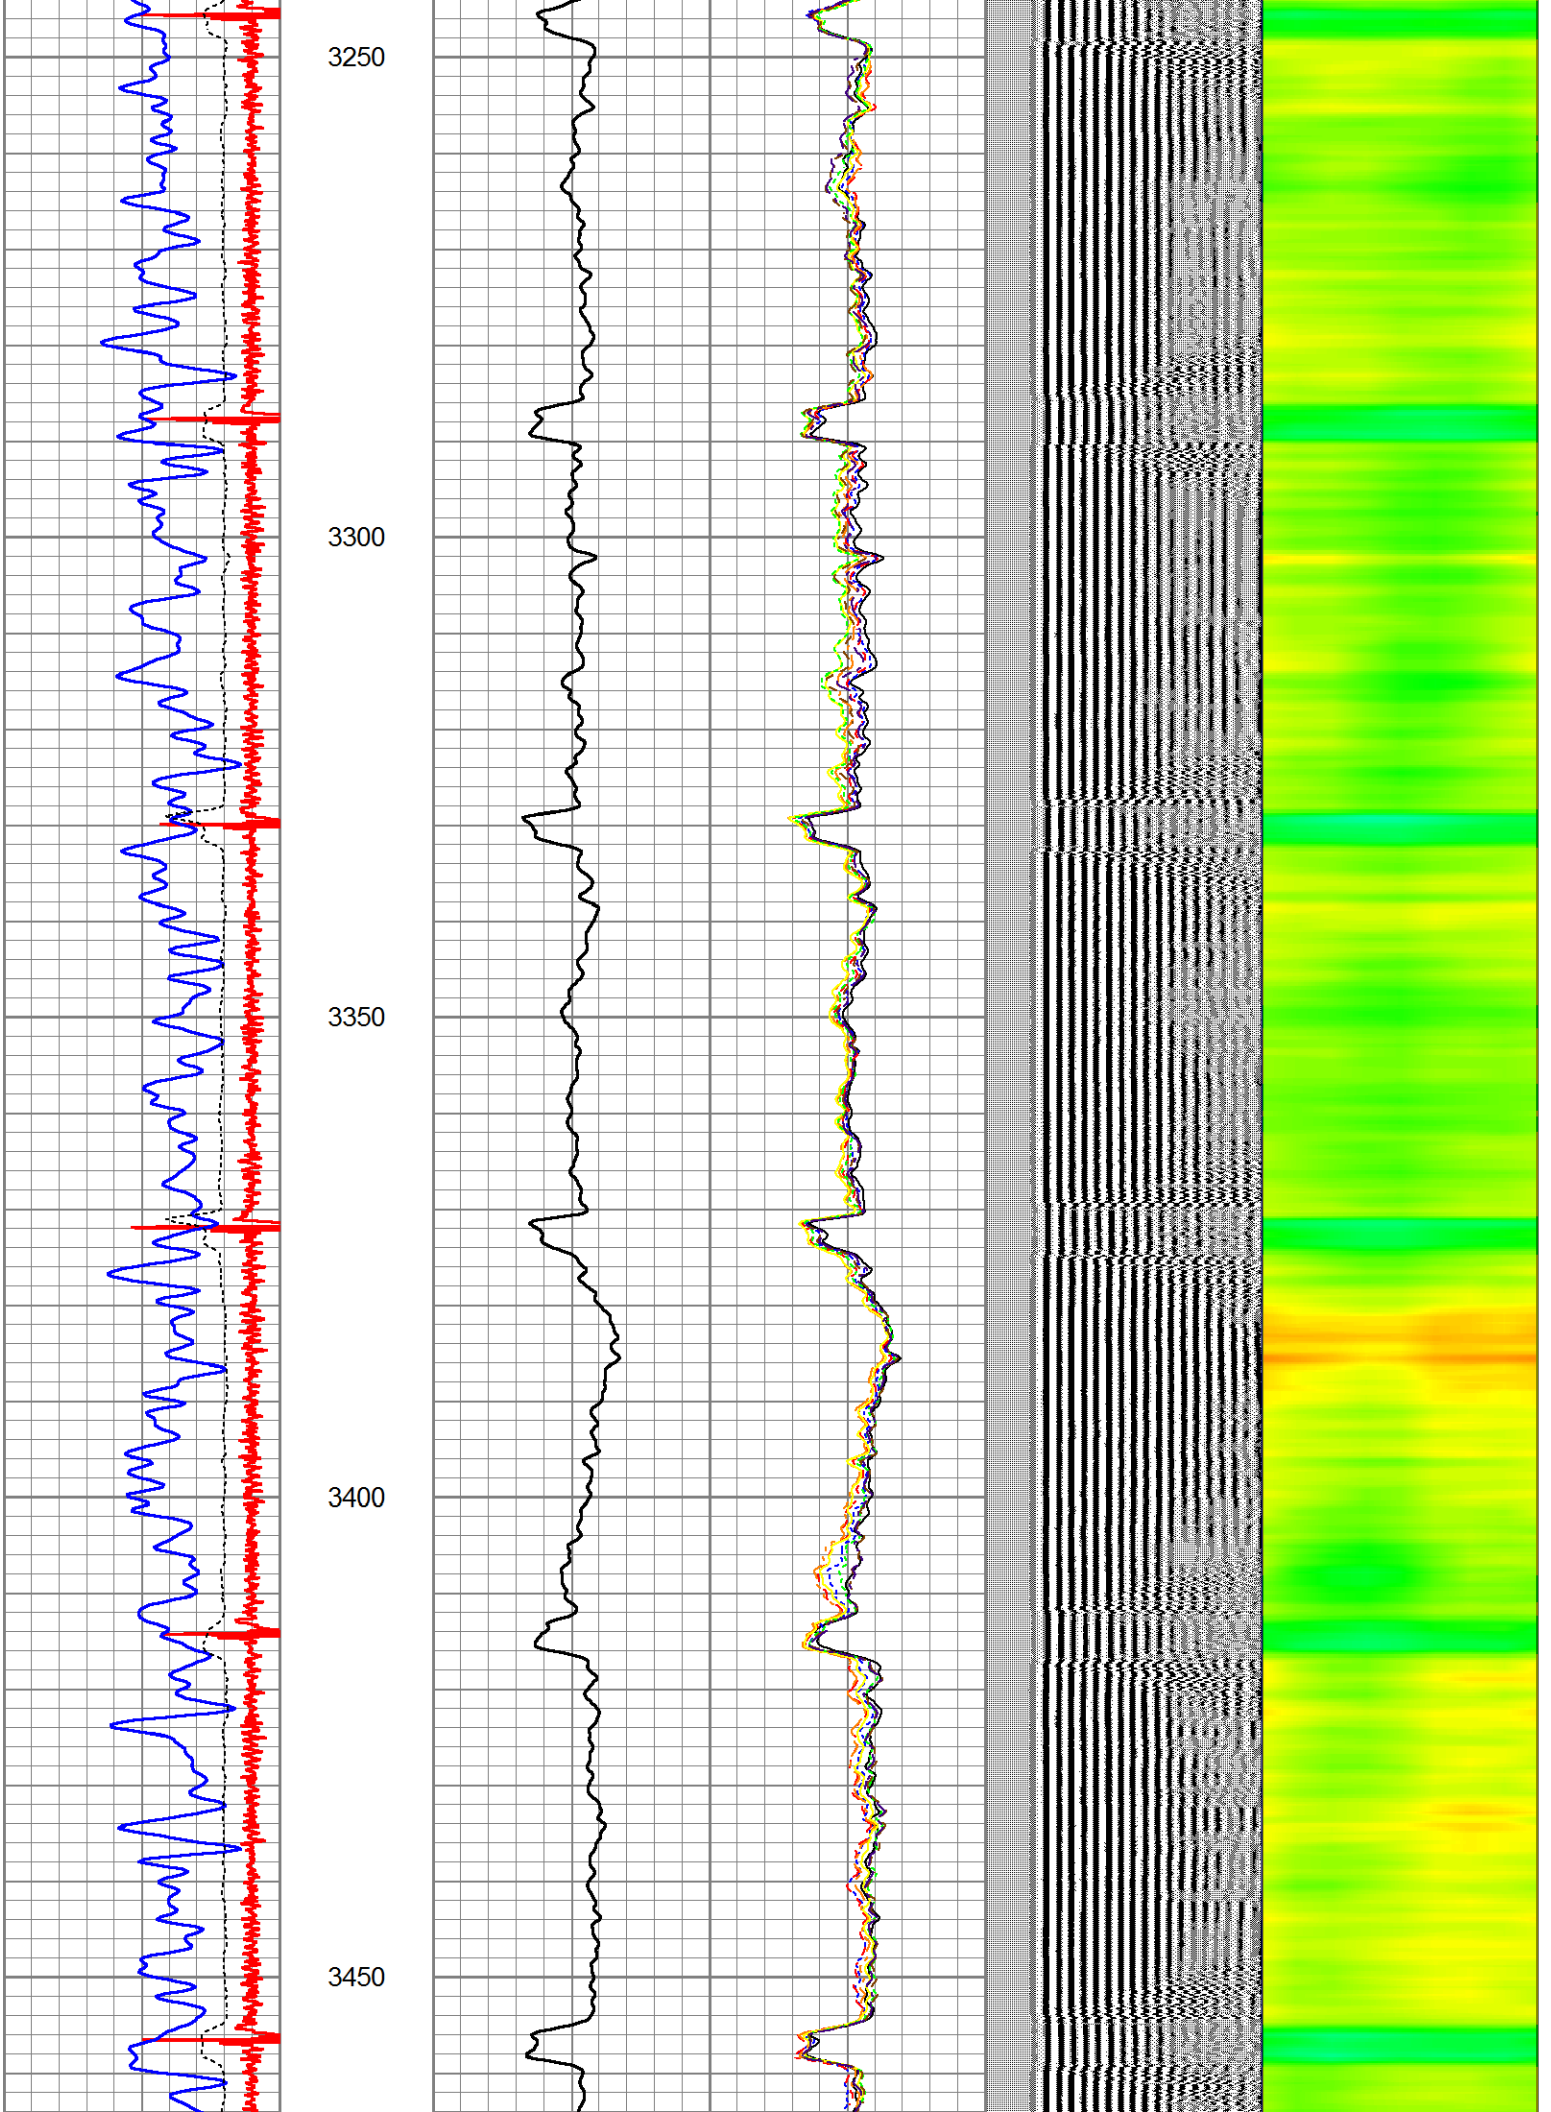

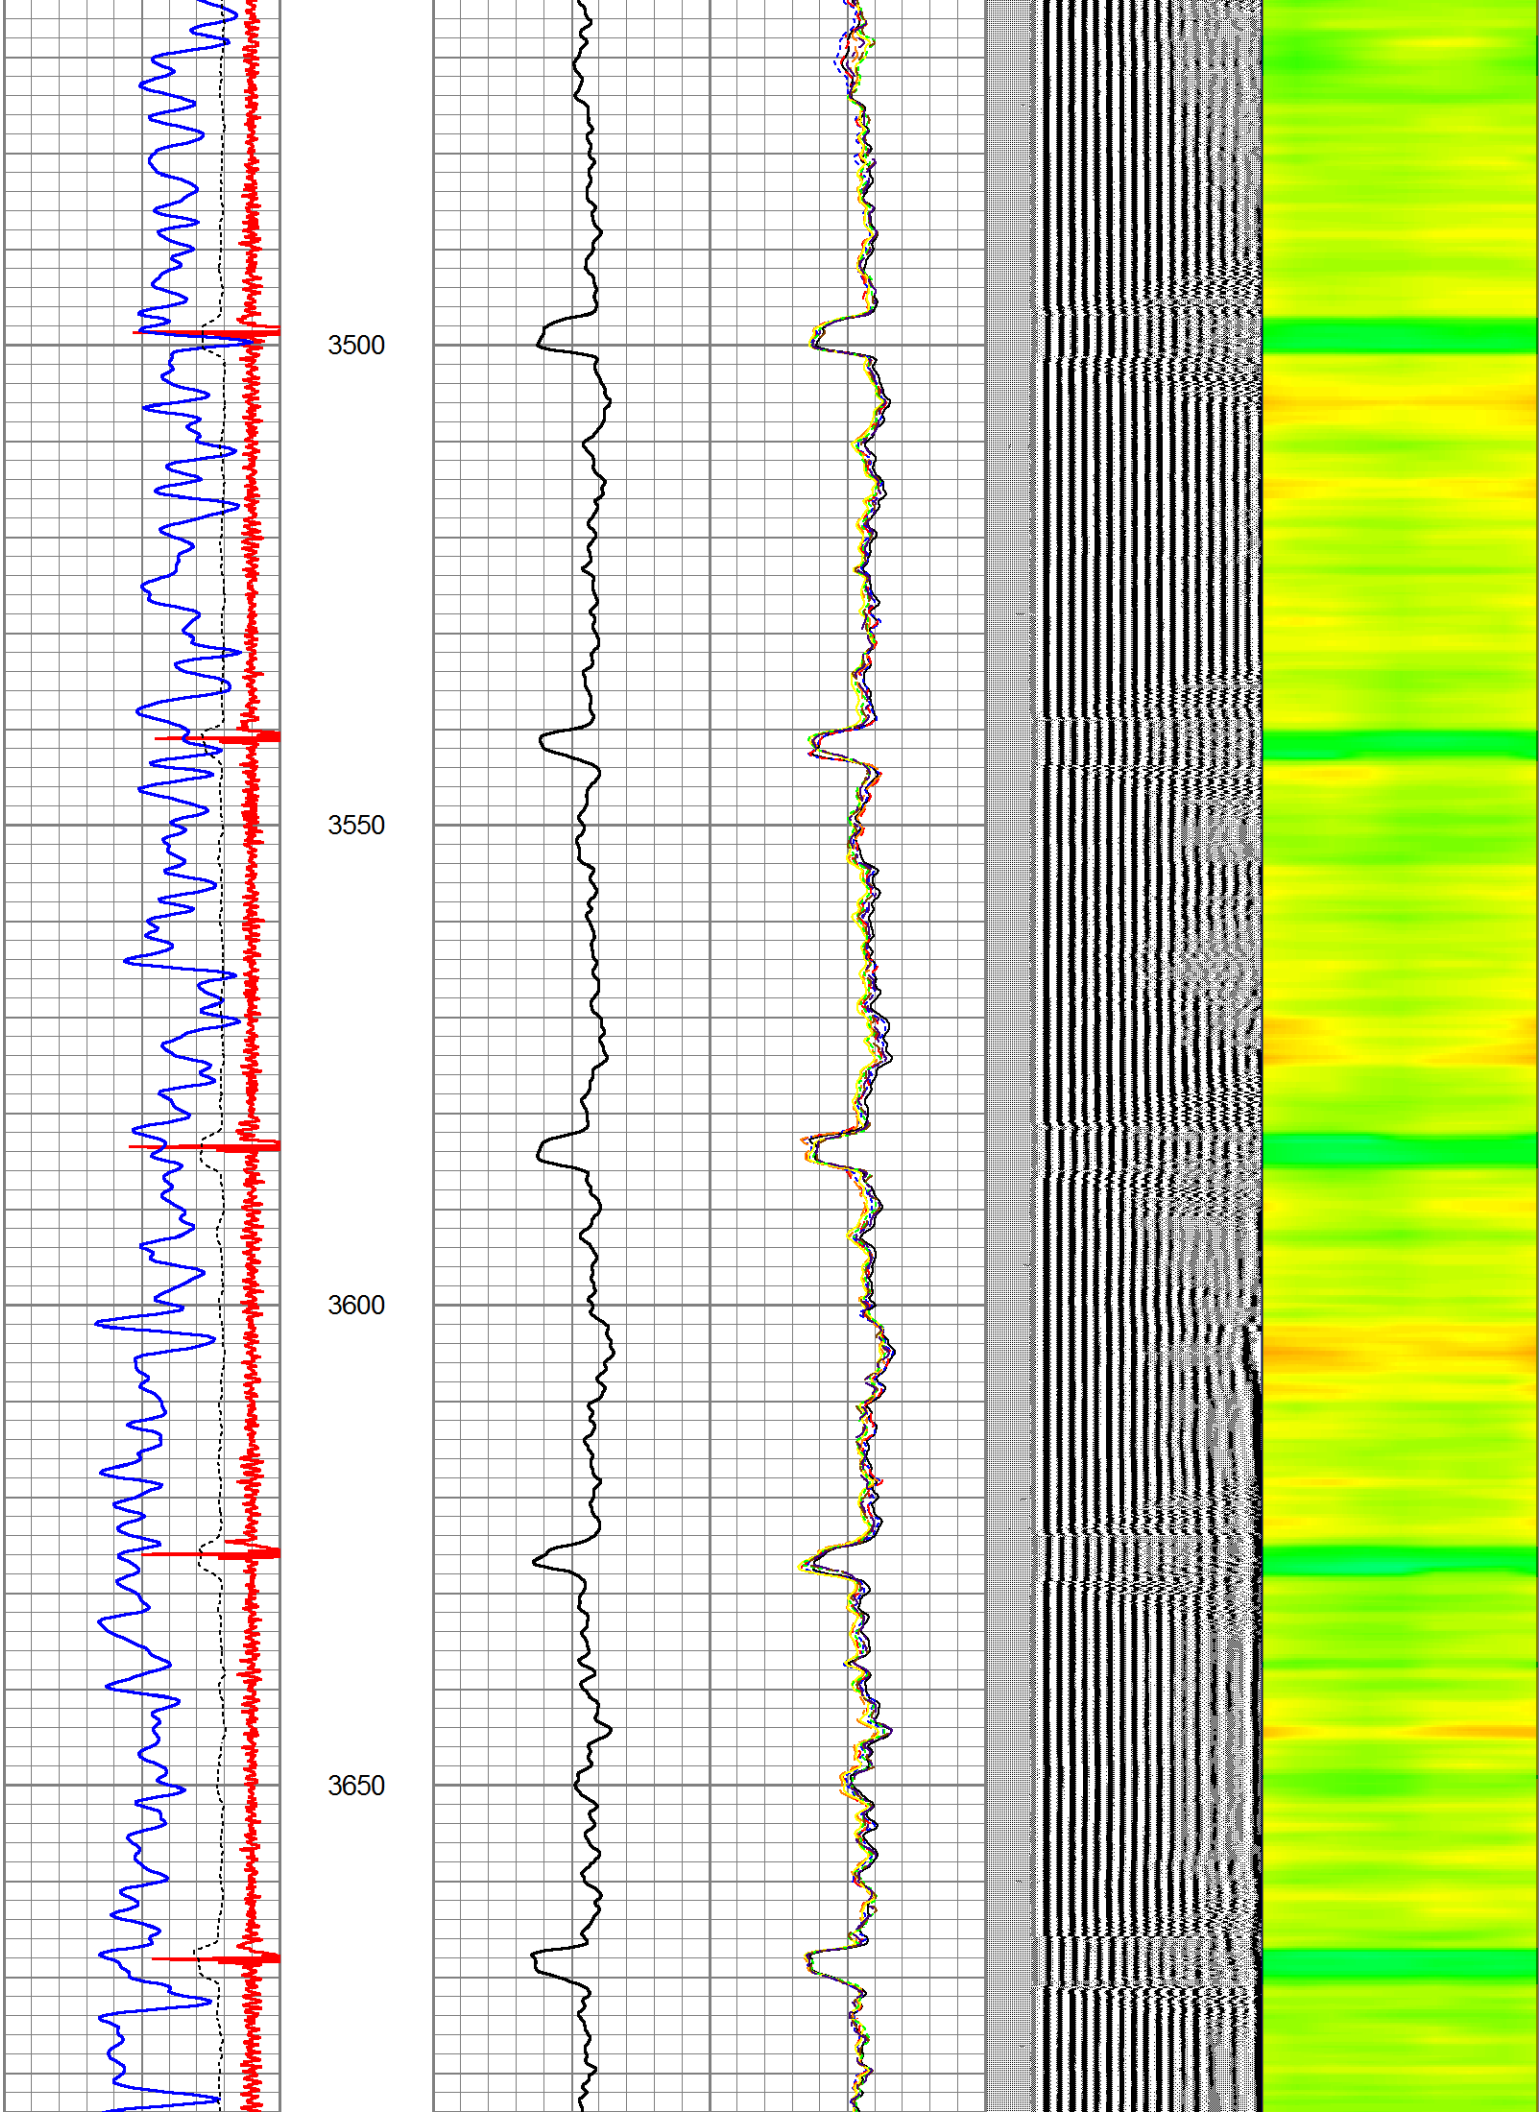

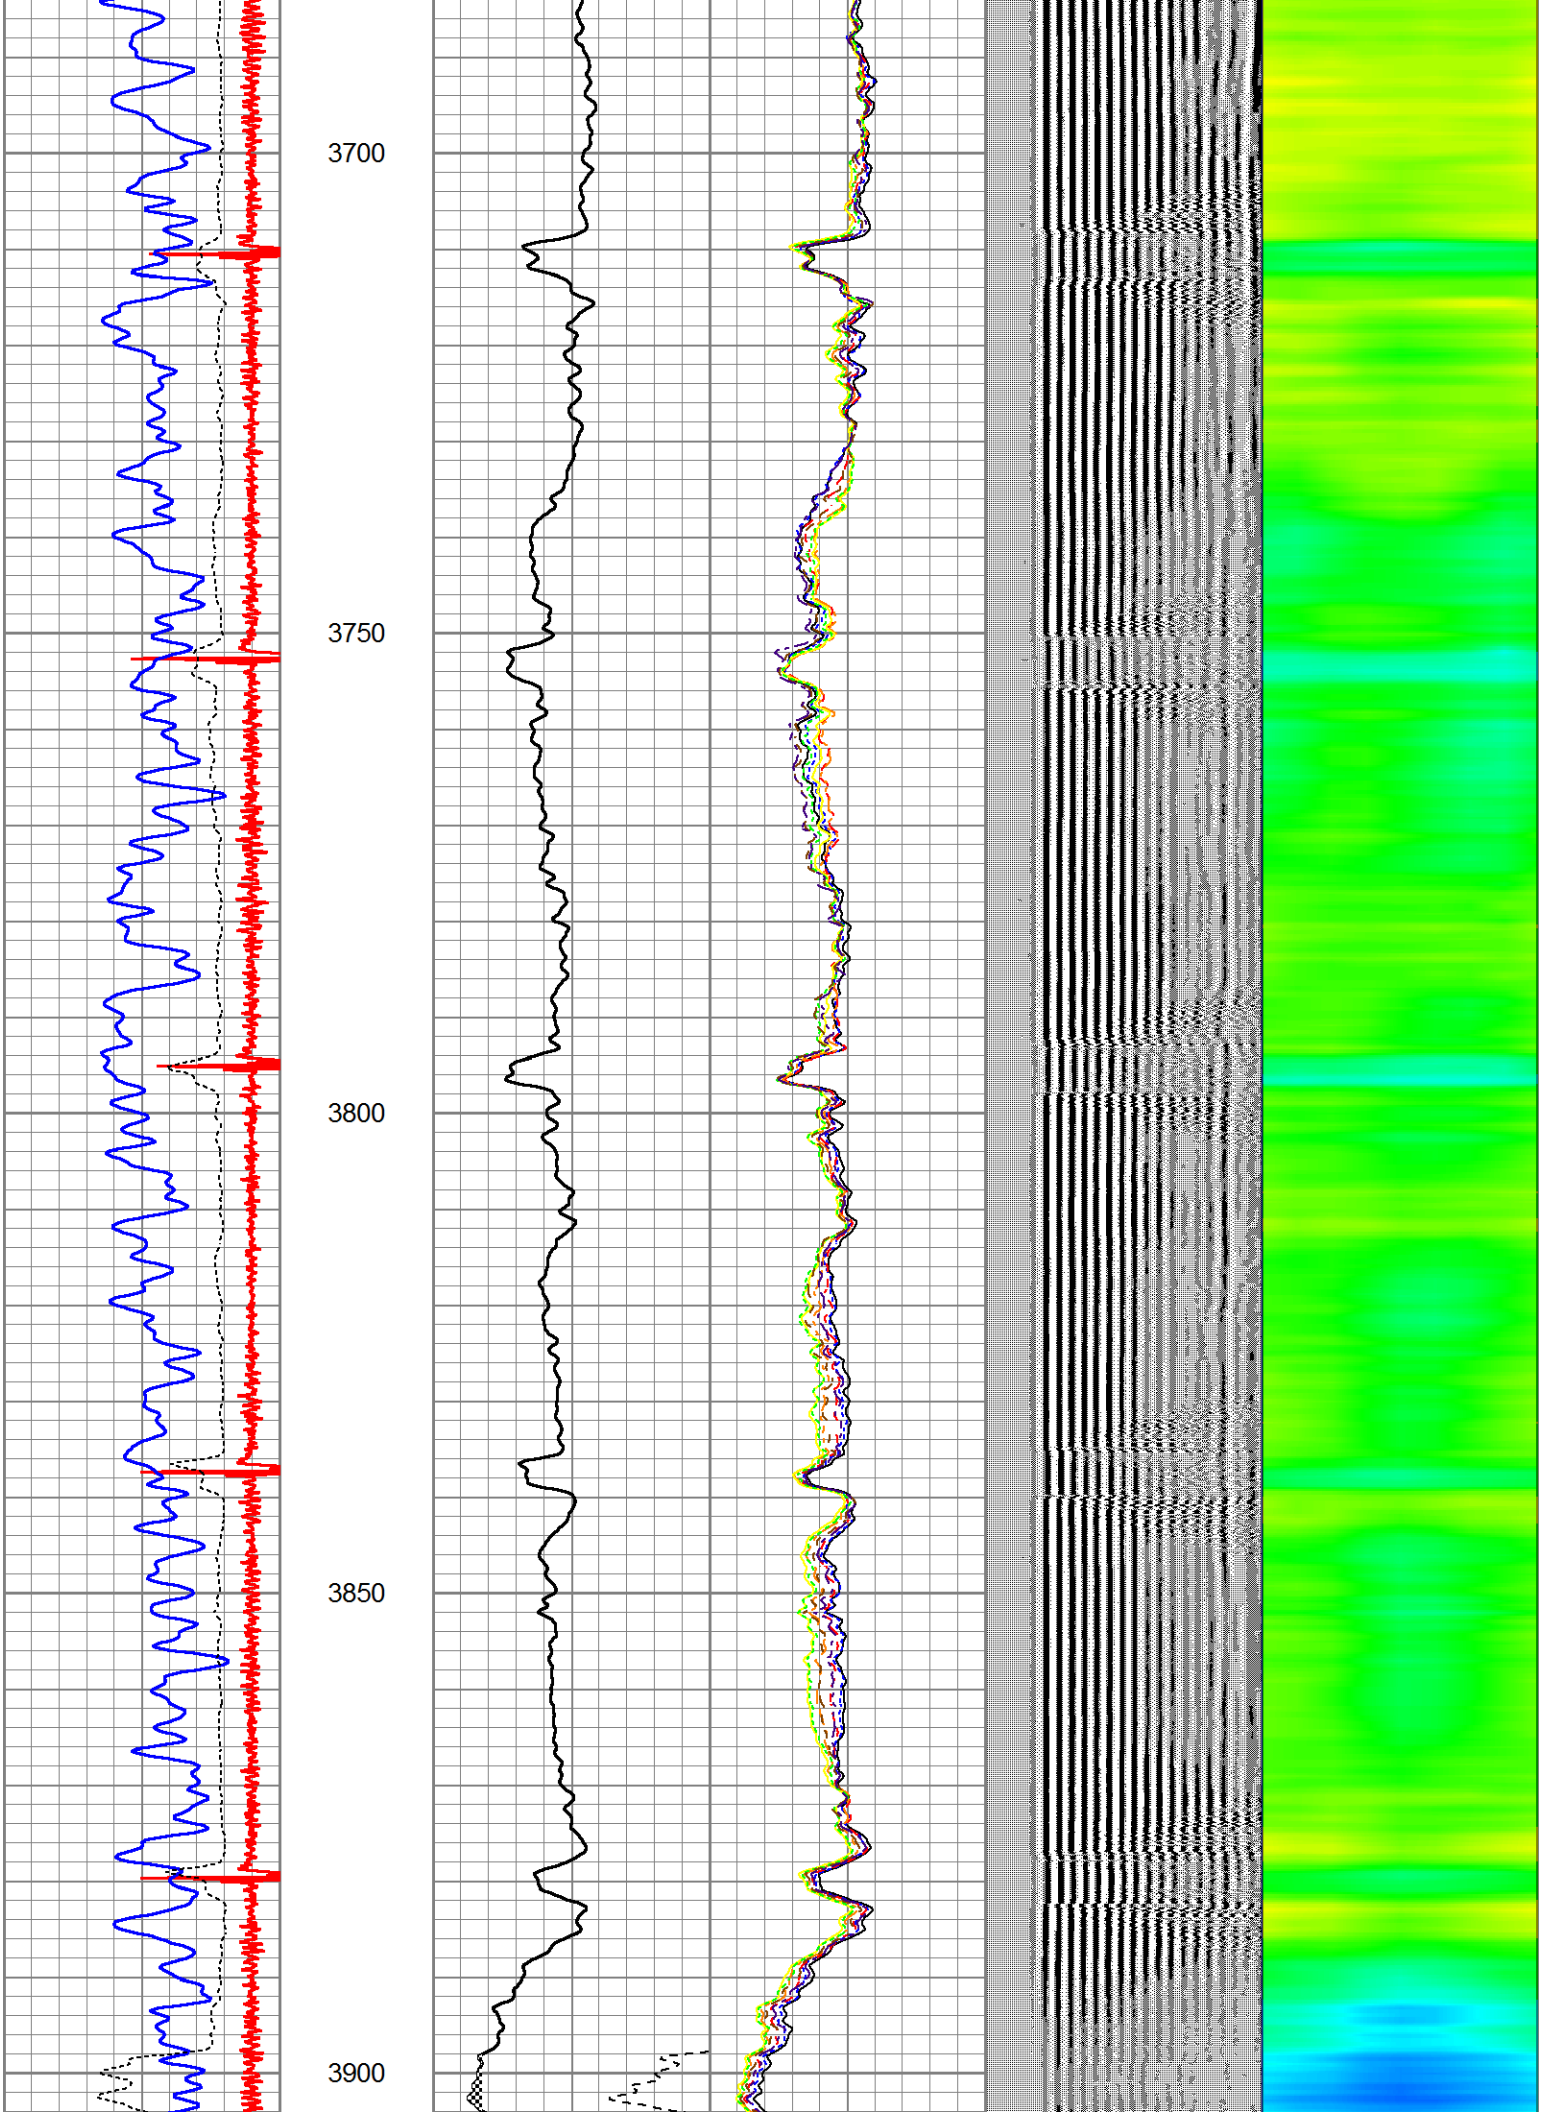




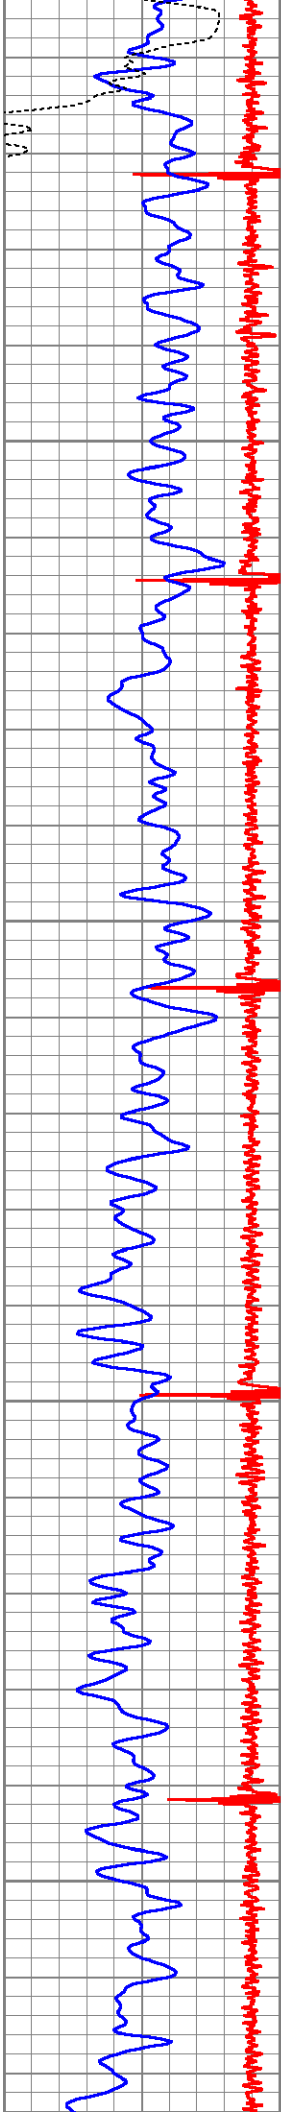



3950

4000

4050

4100

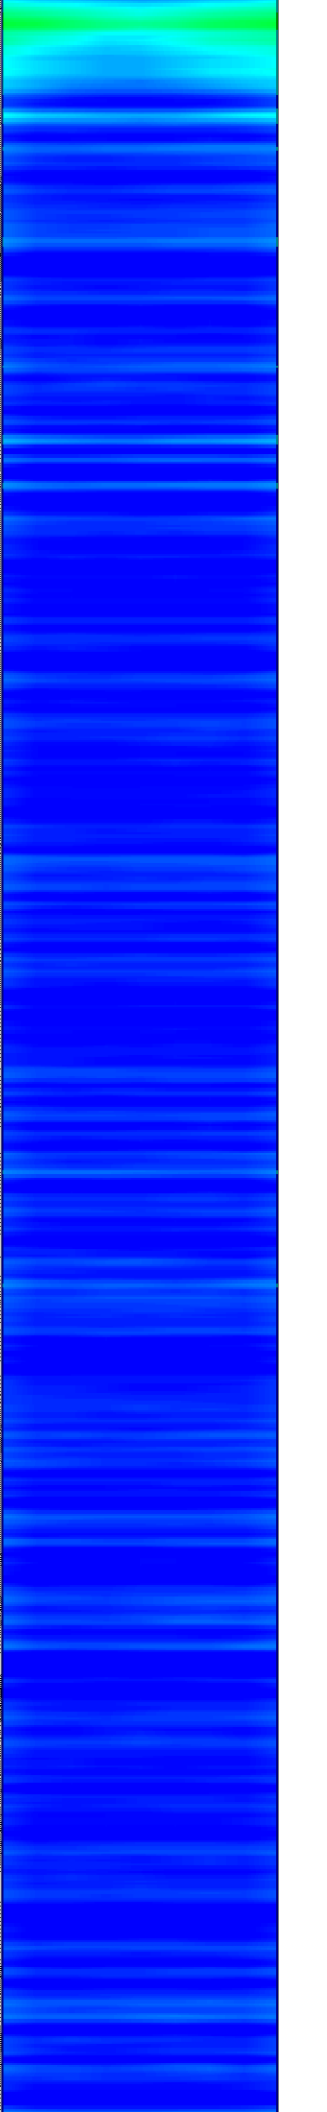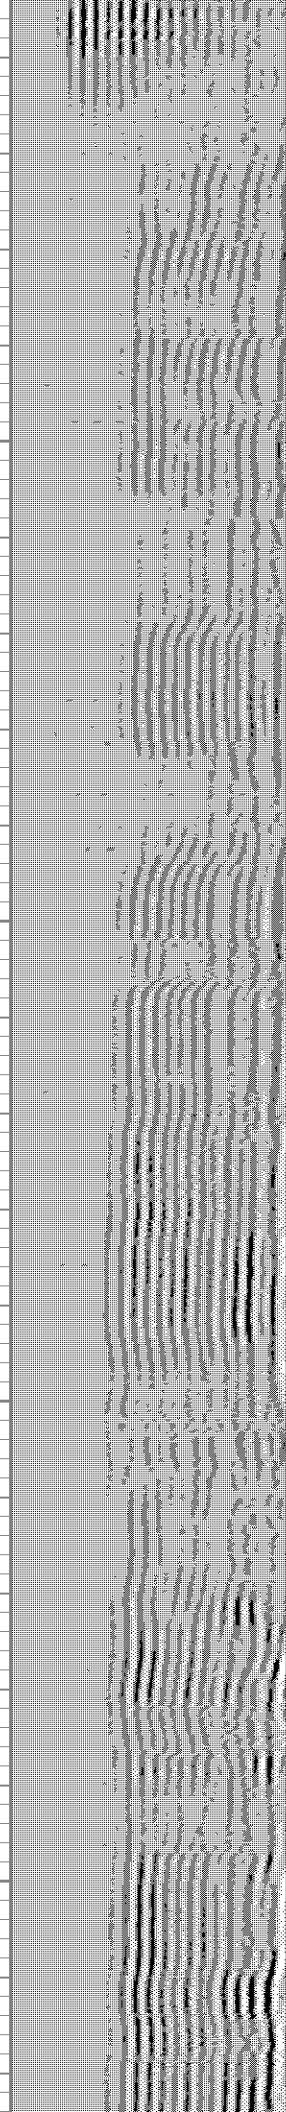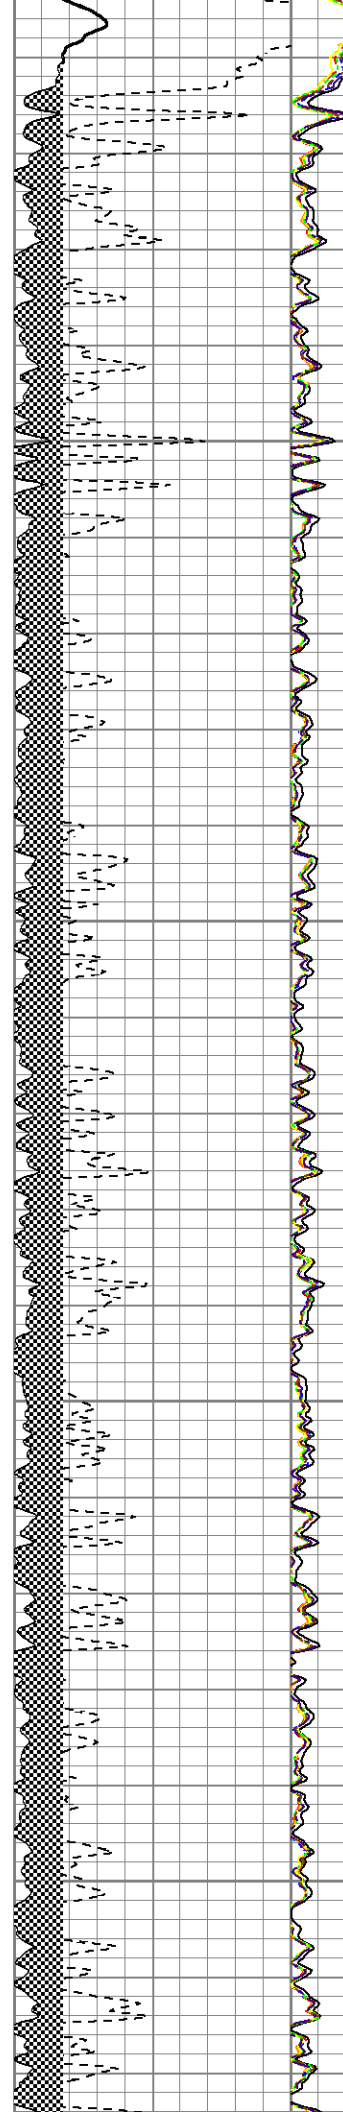



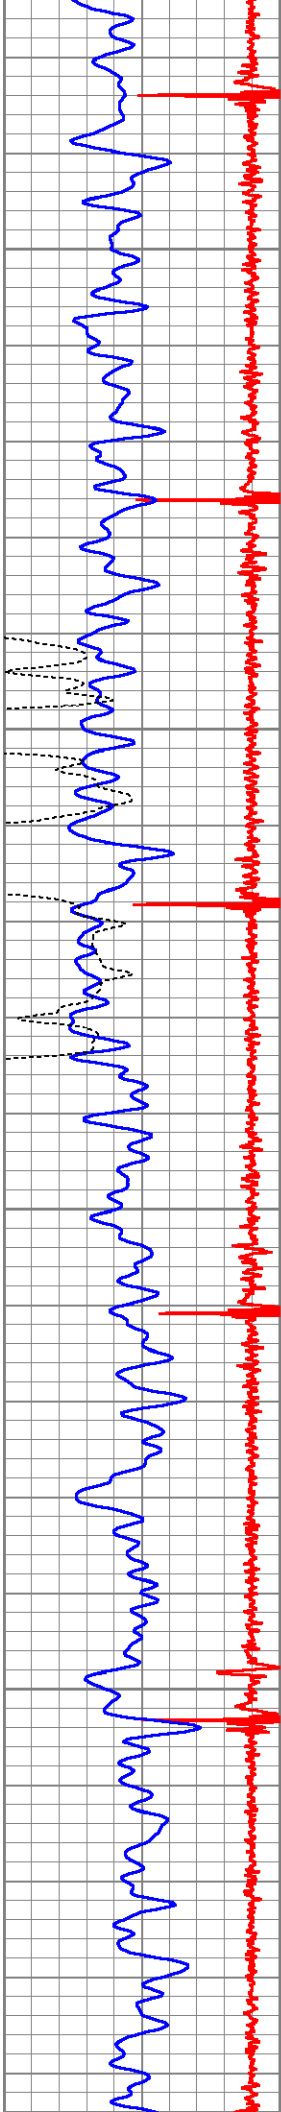



4150

4200

4250

4300

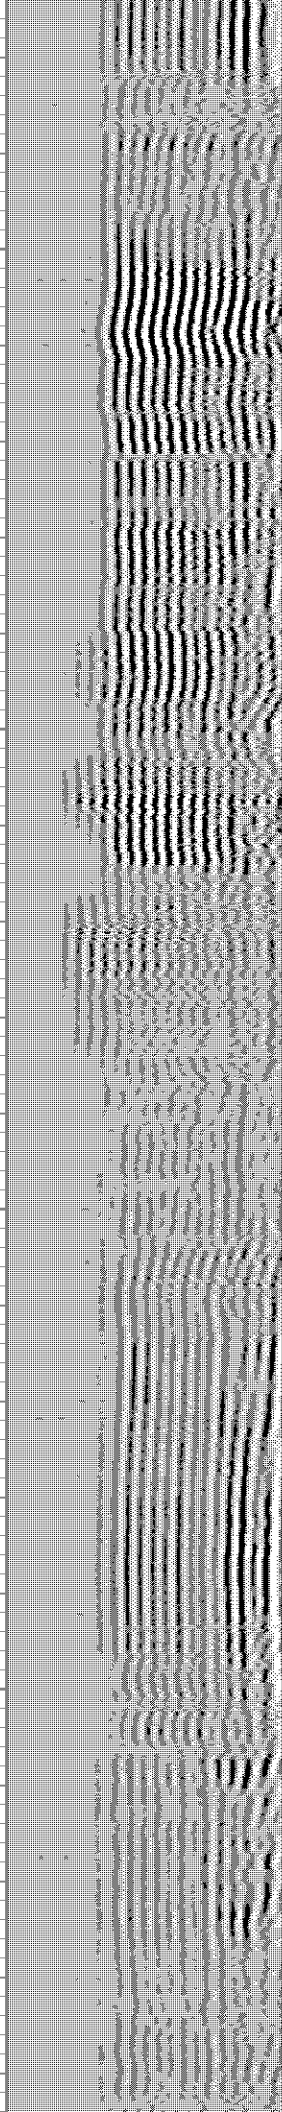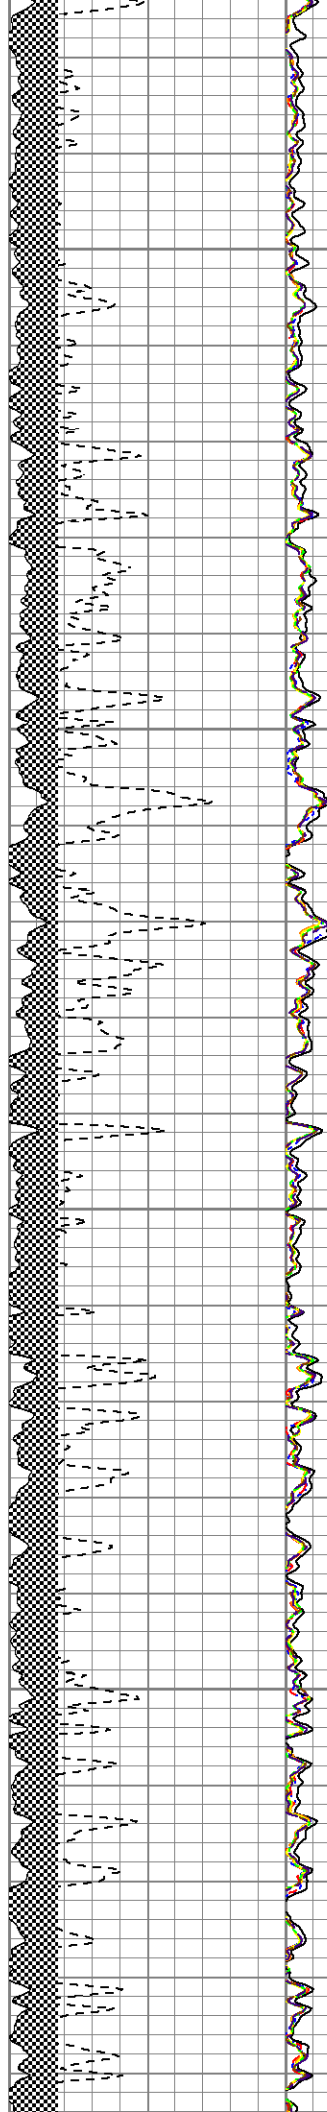

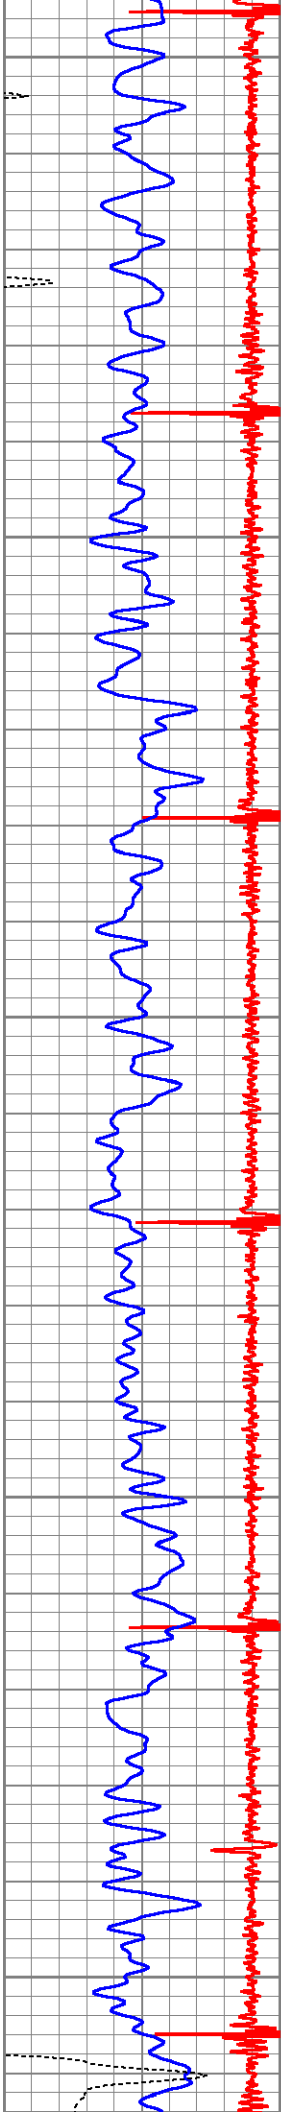



4350


4400

4450

4500

4550

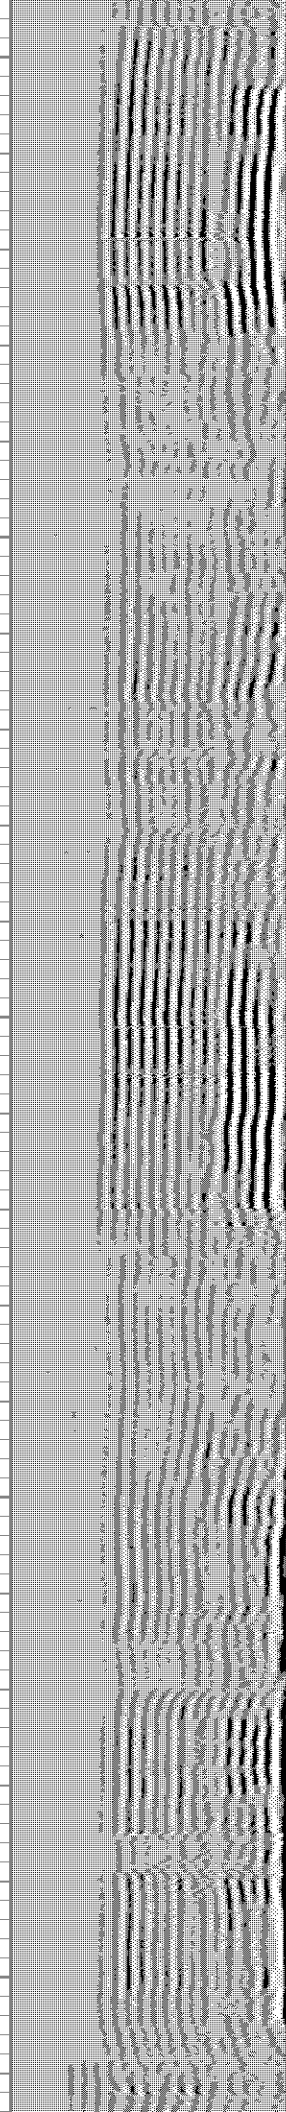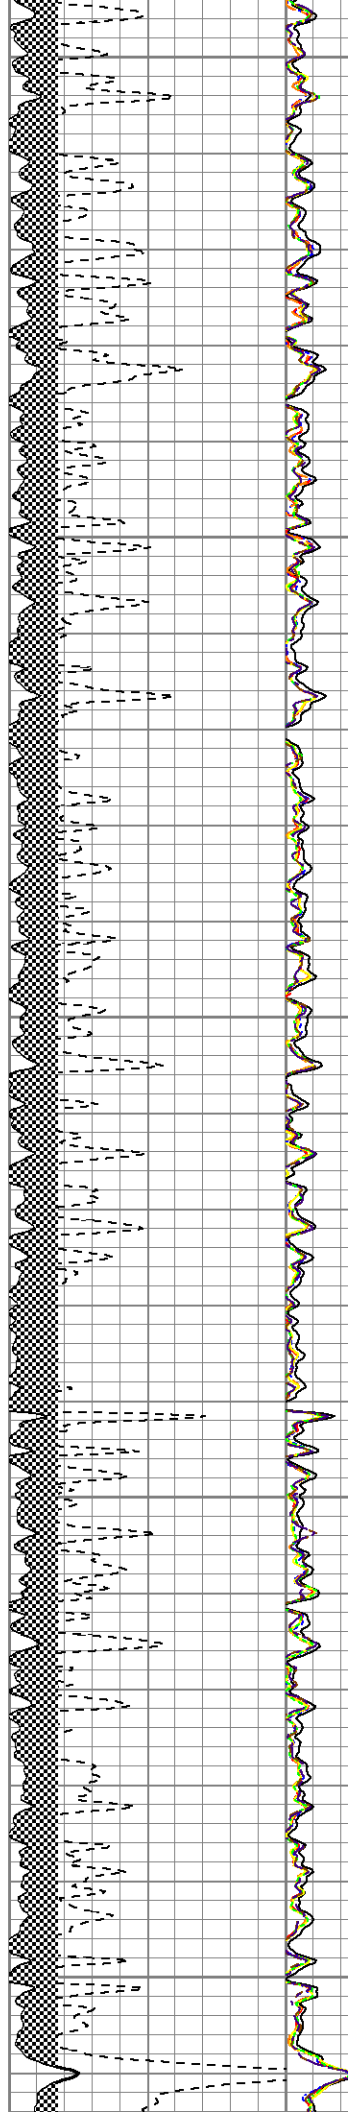



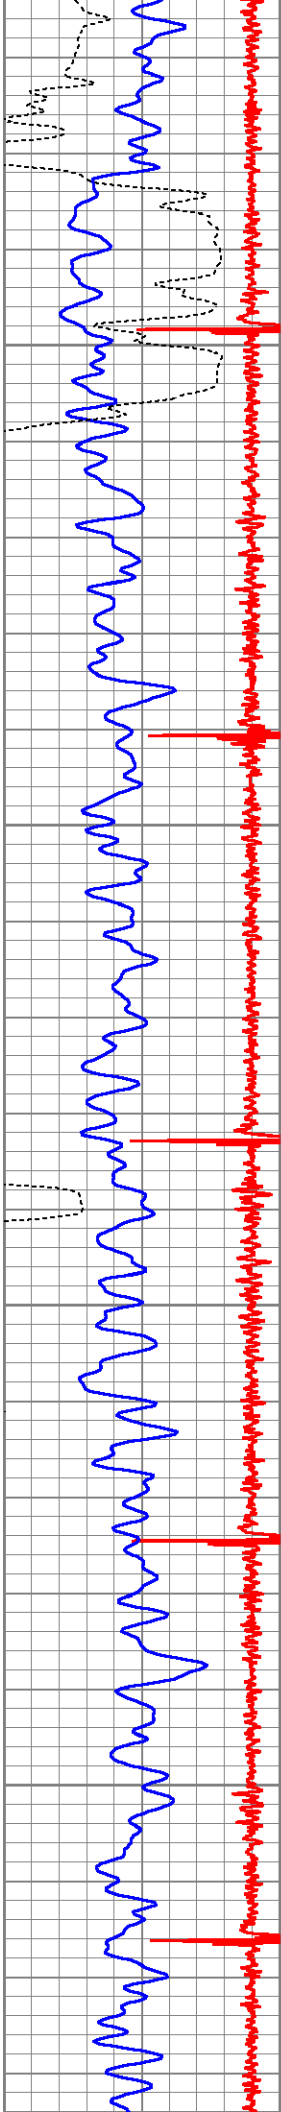



4600

4650

4700

4750

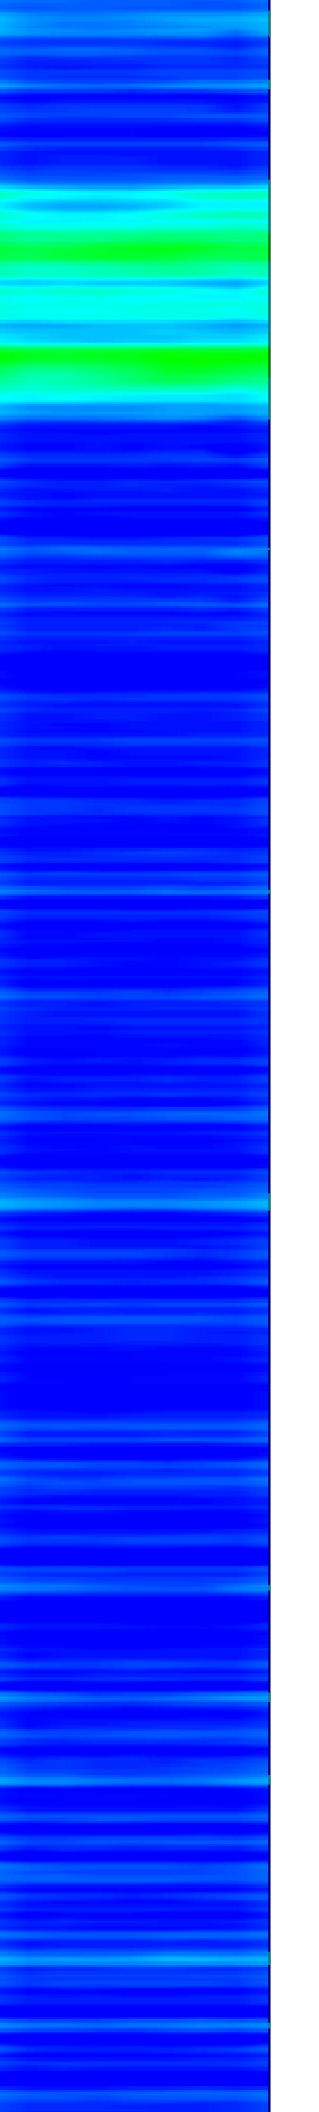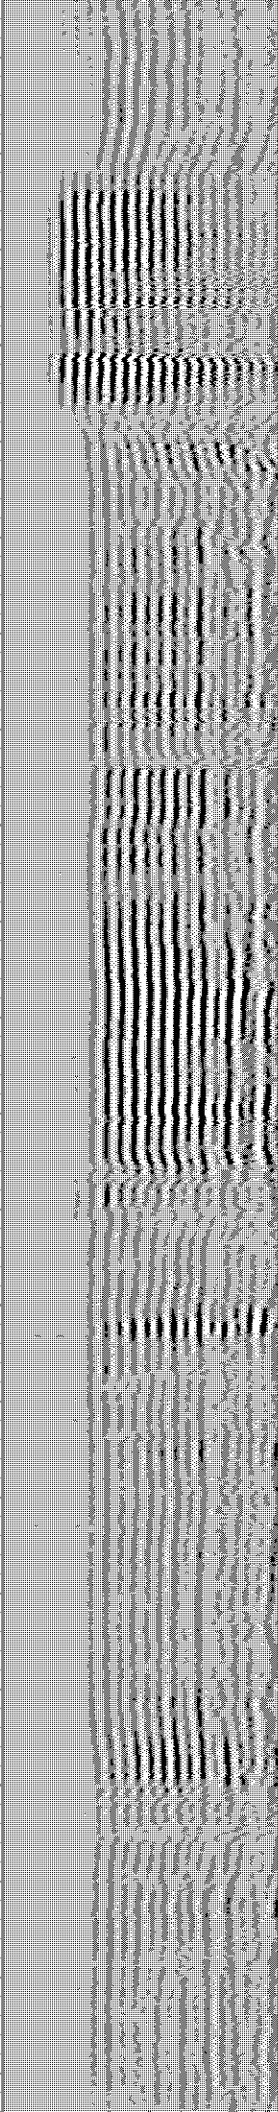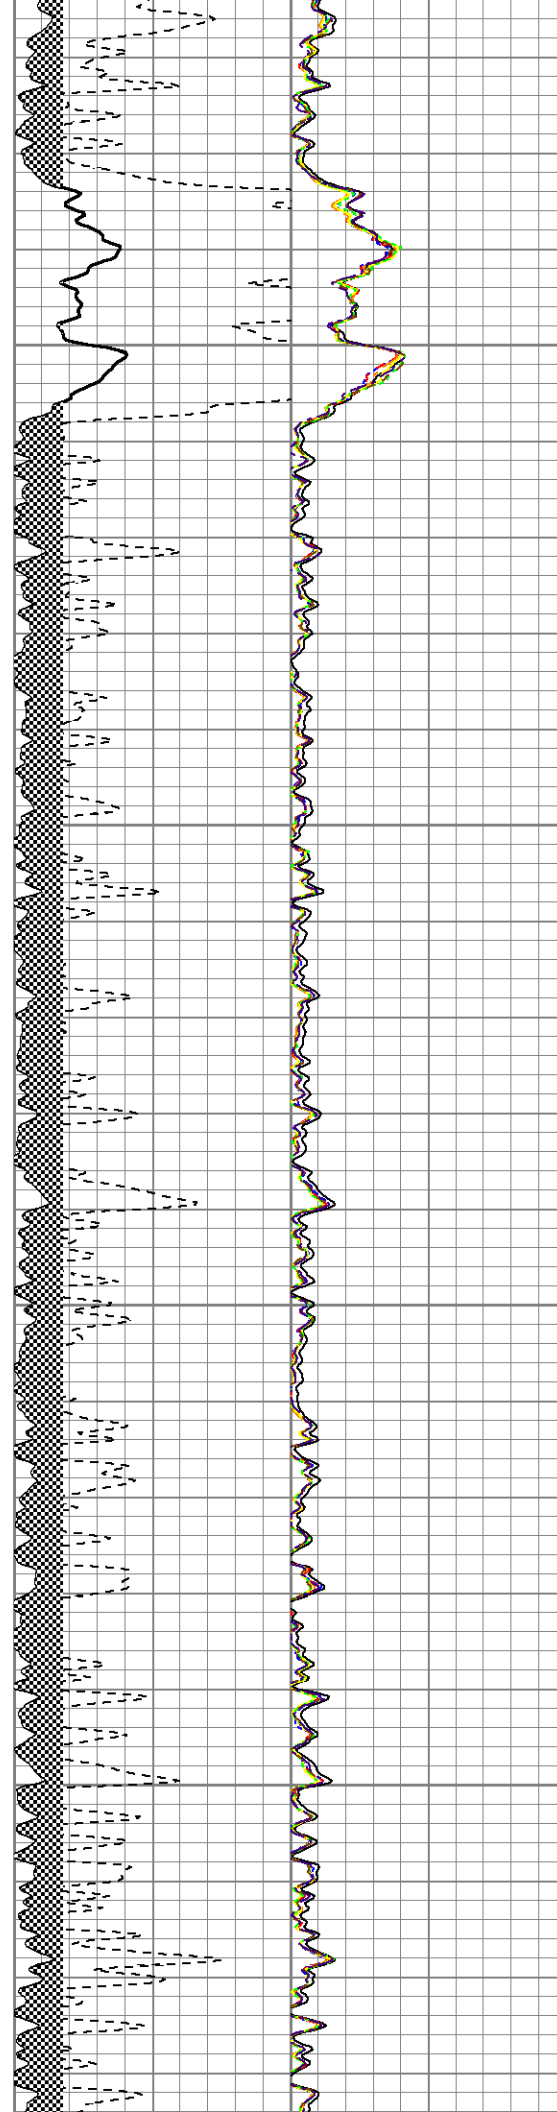

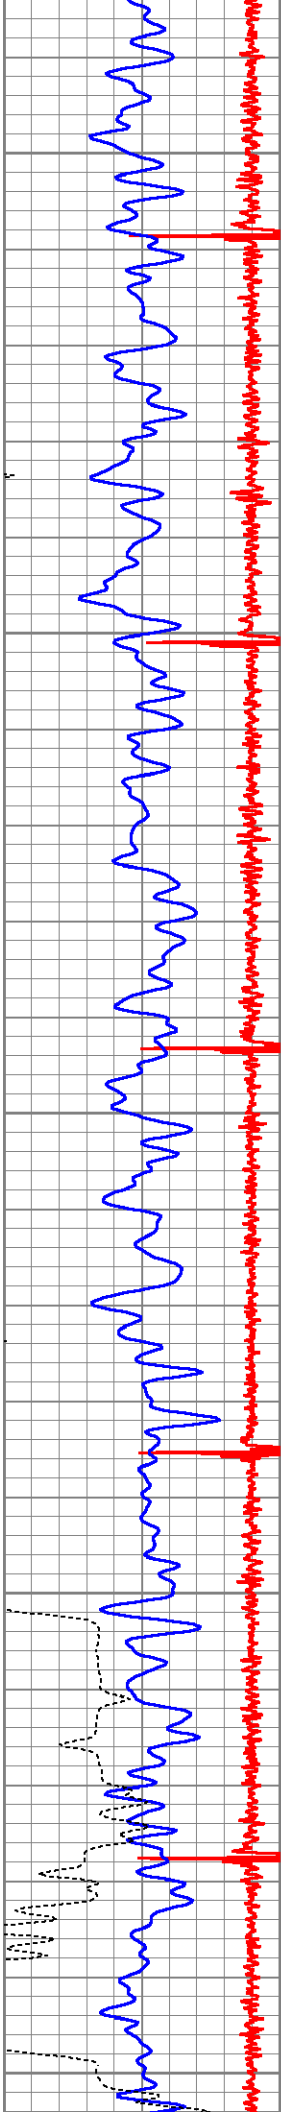





4800


4850

4900

4950

5000

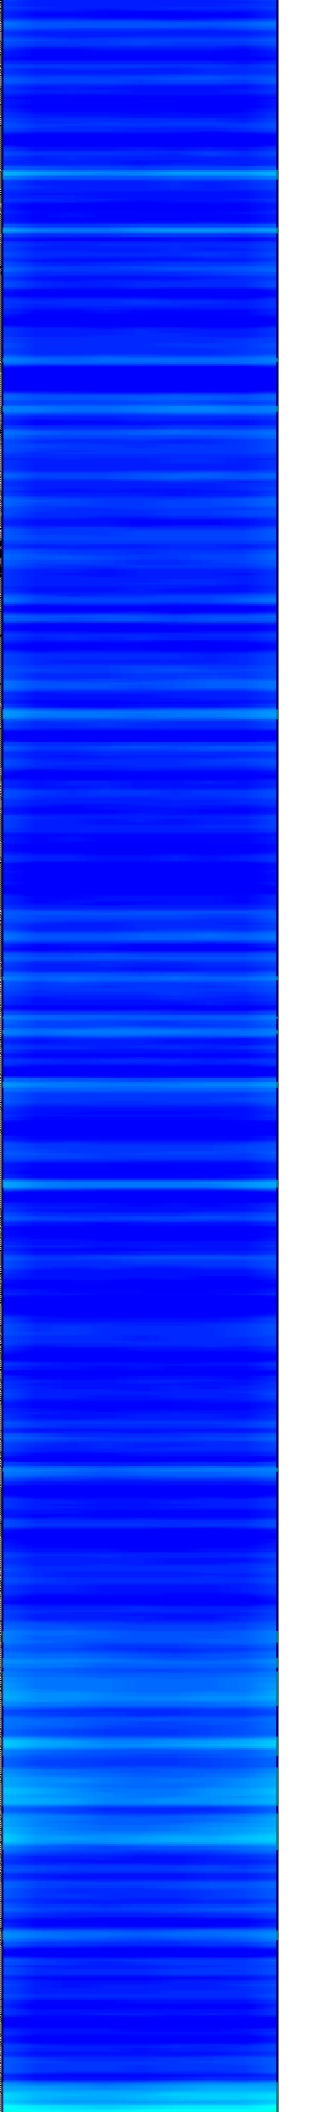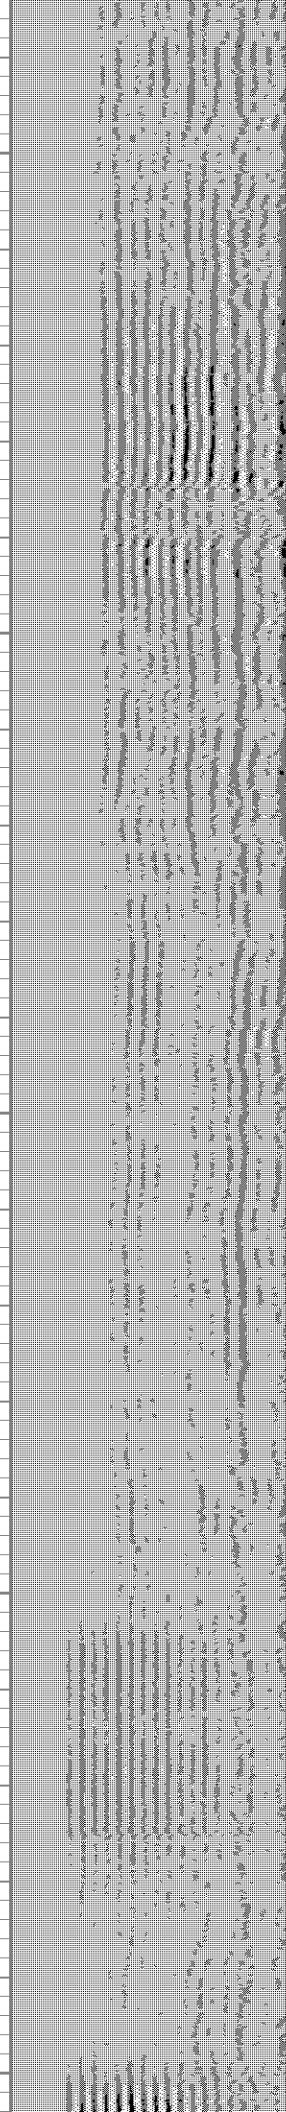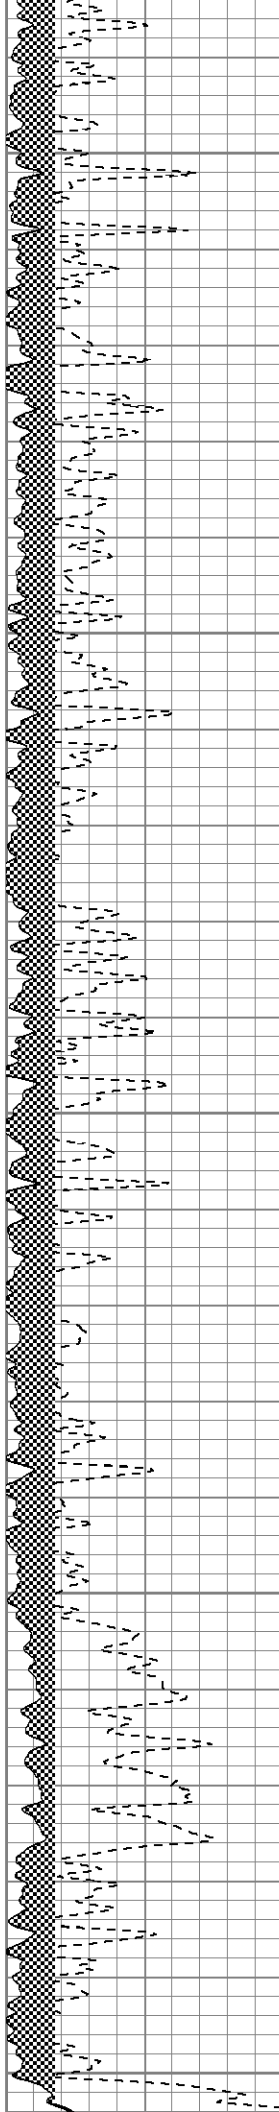



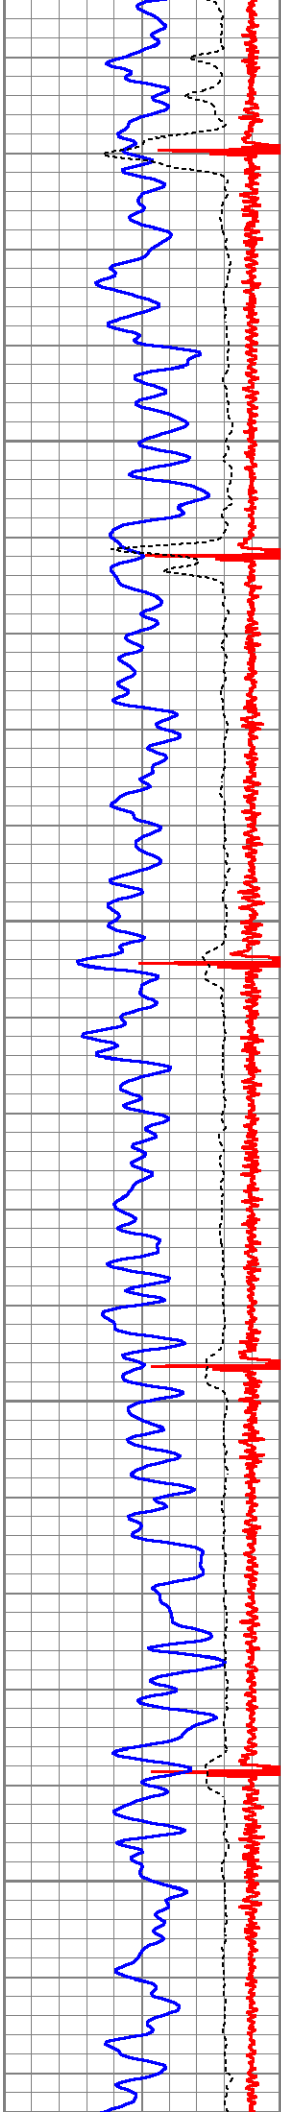



5050

5100

5150

5200

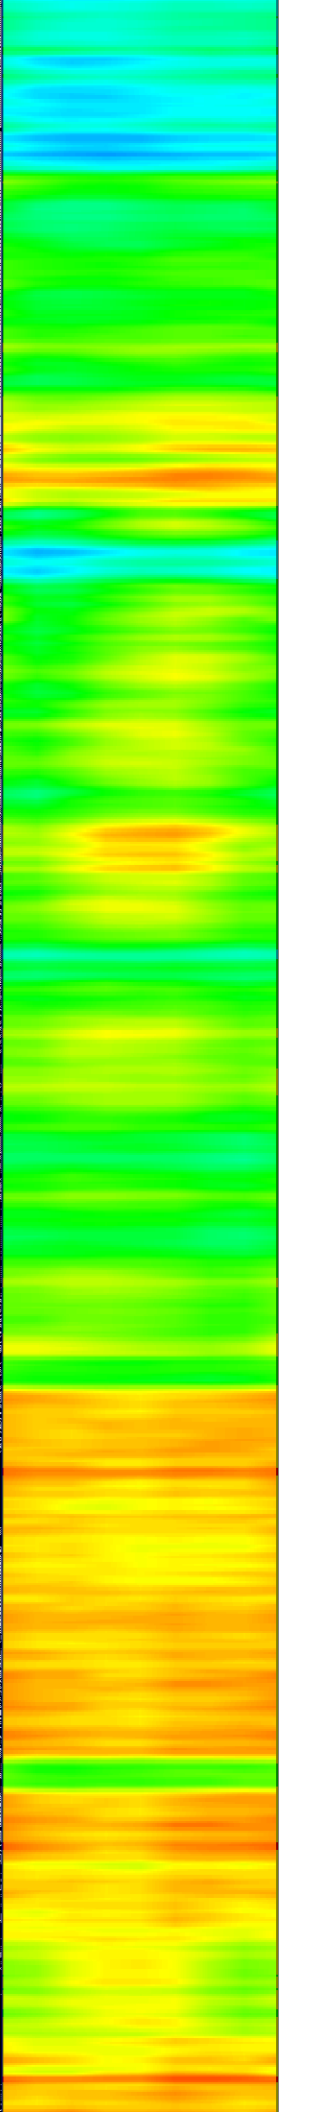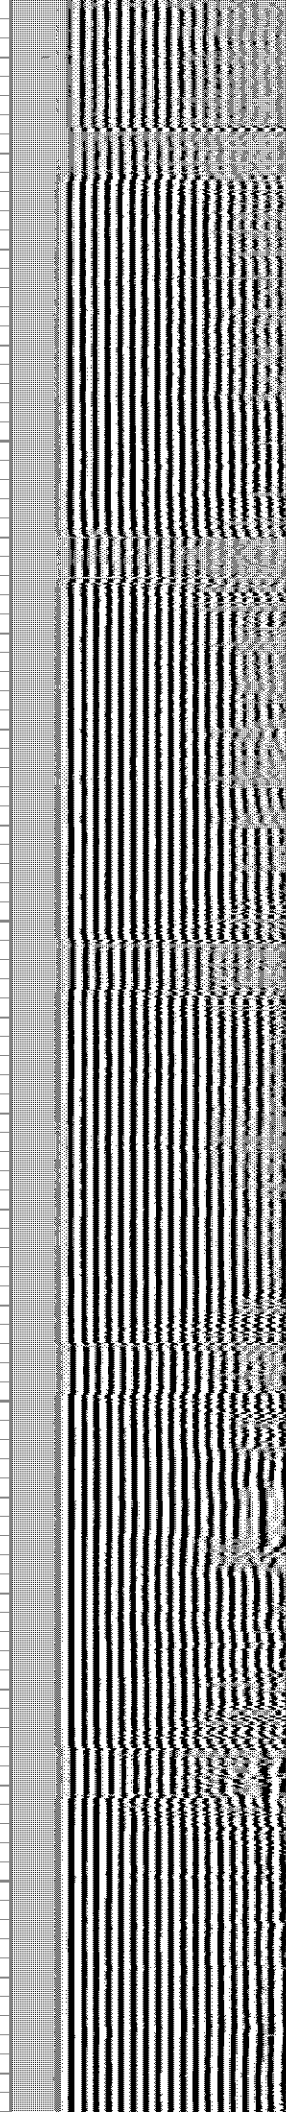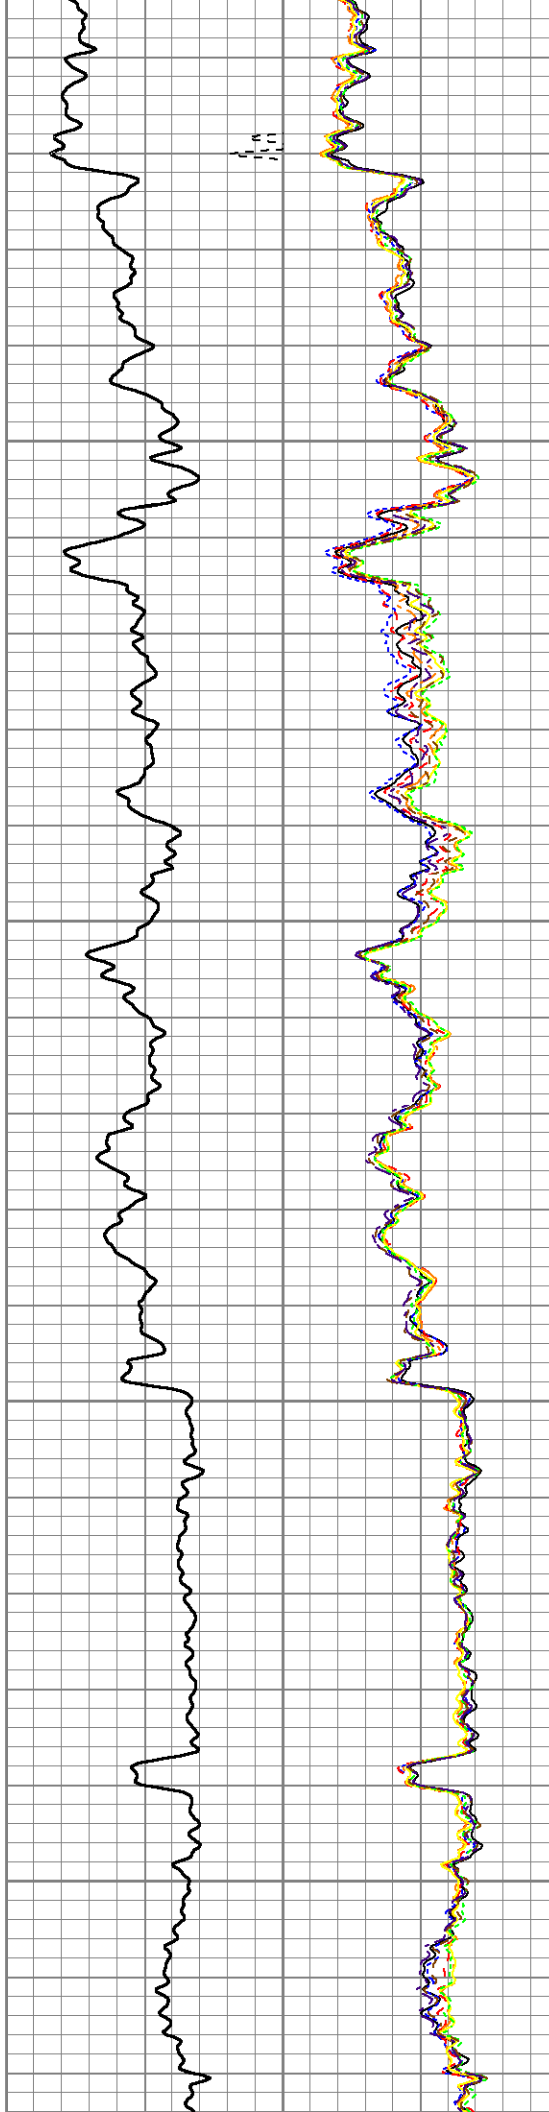




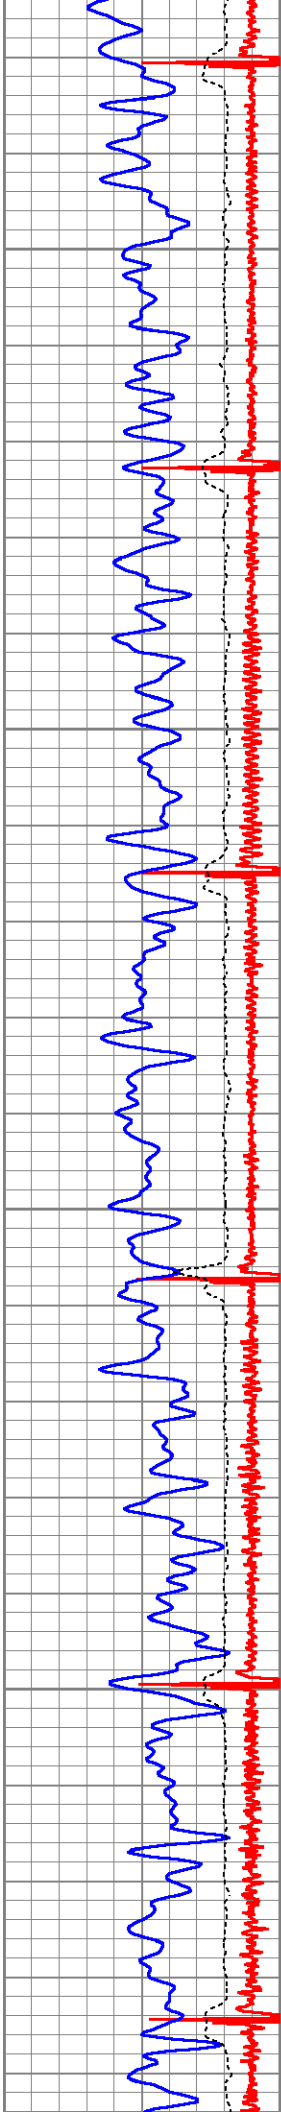



5250


5300


5350


5400

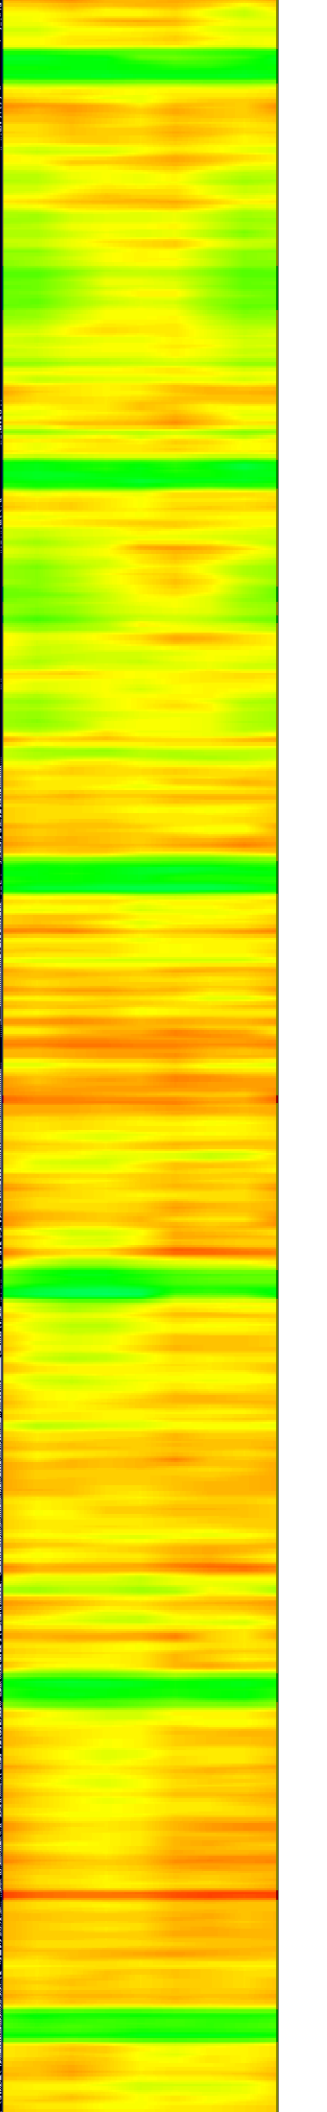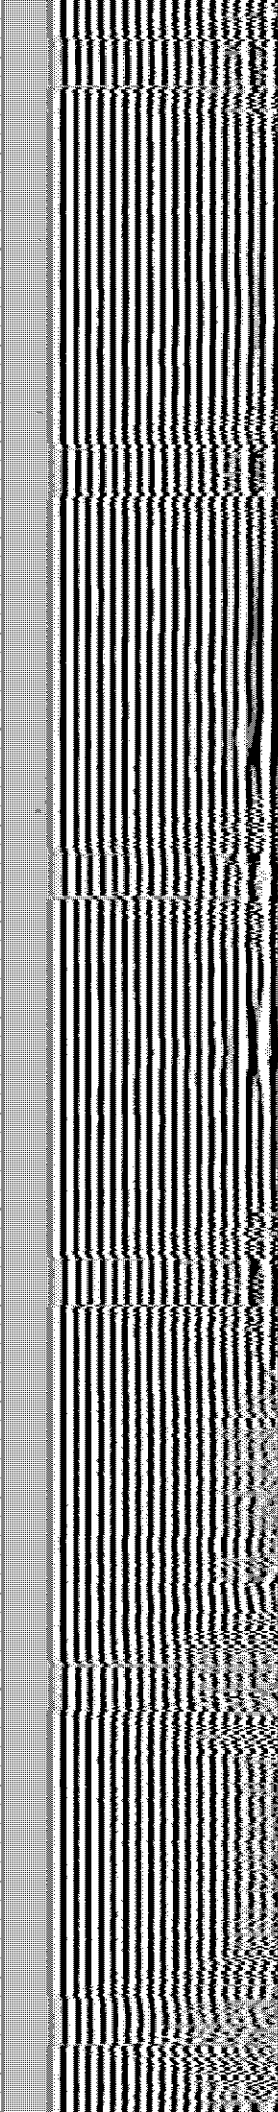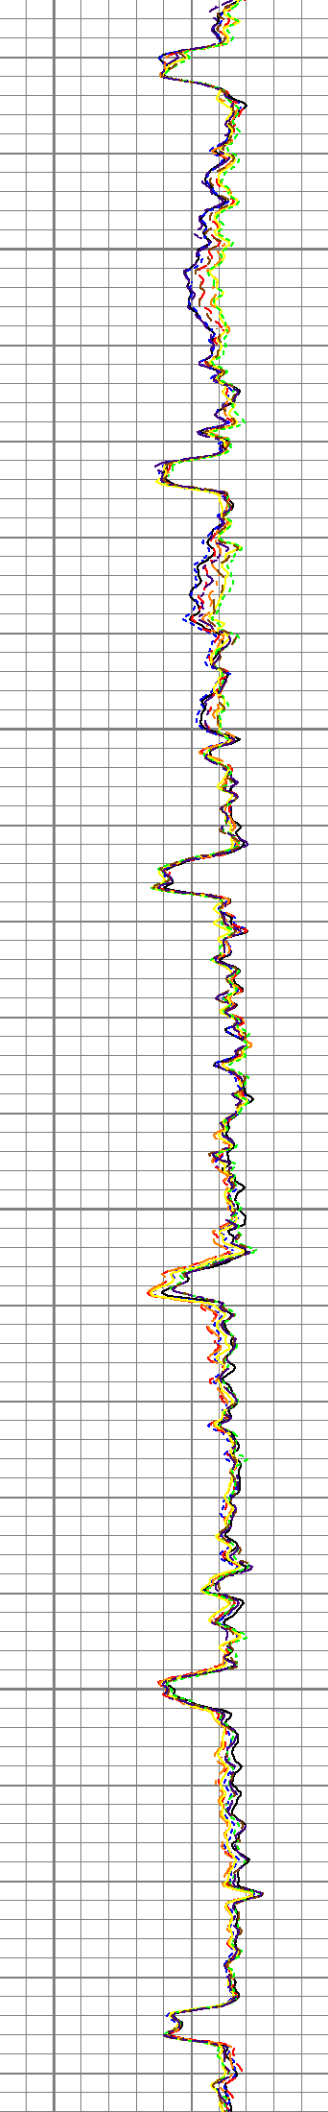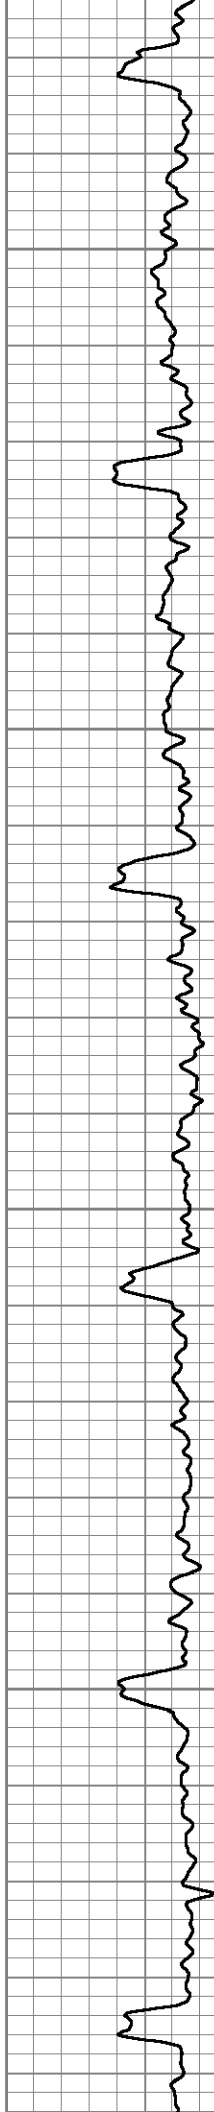

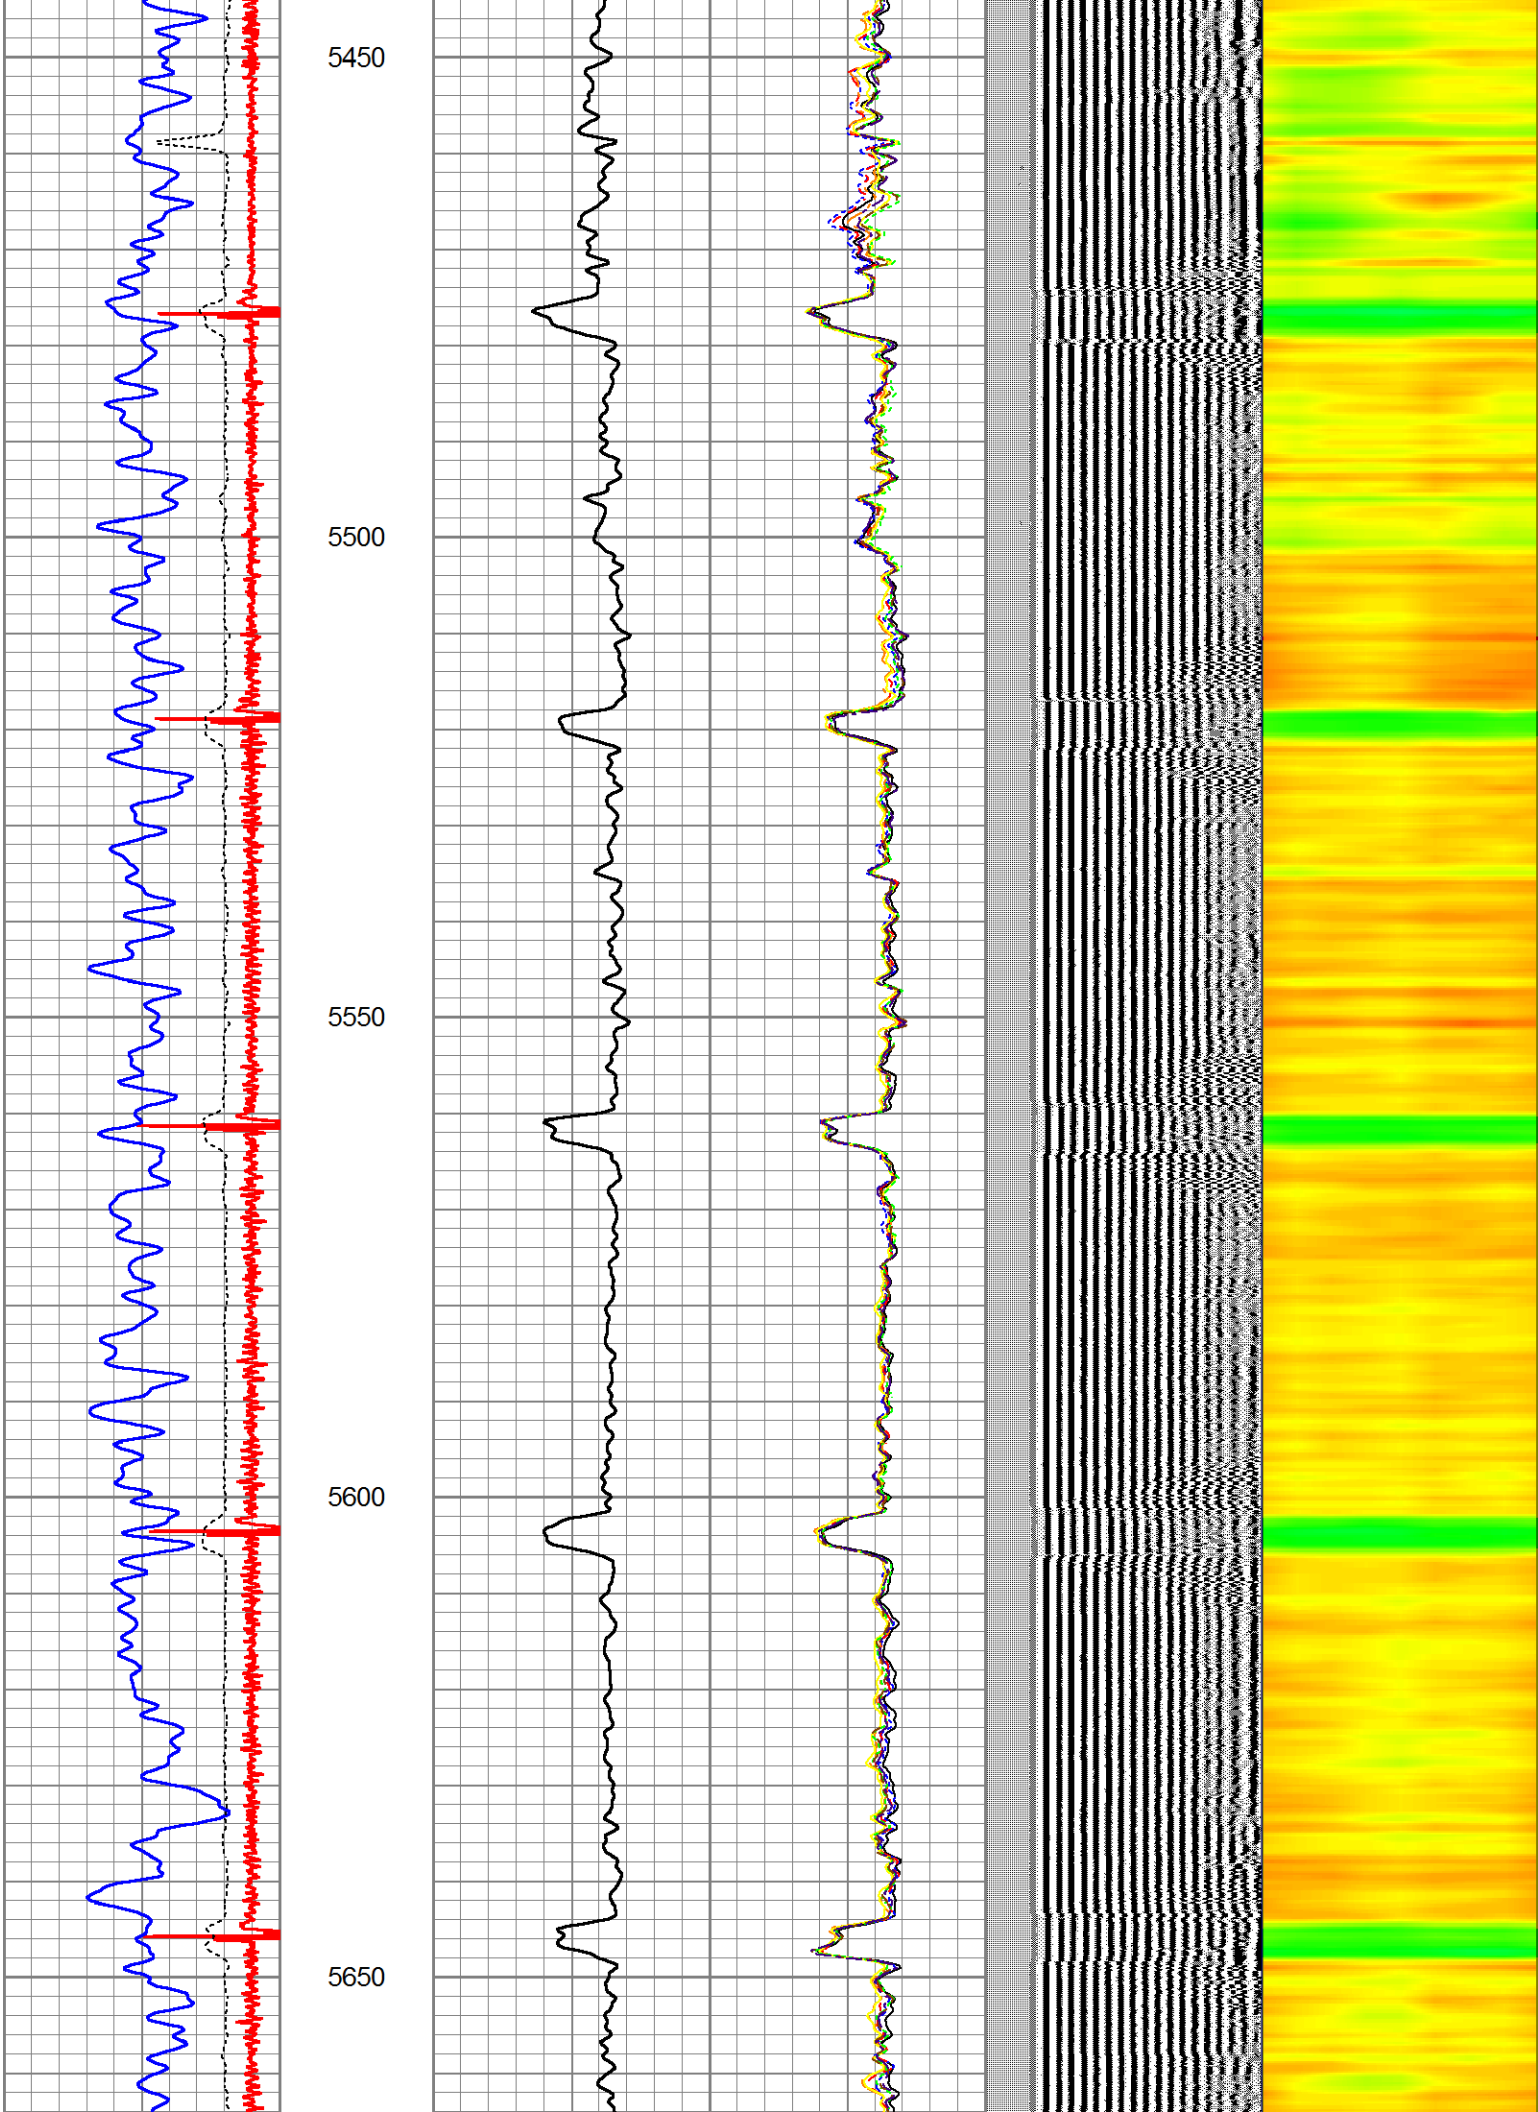

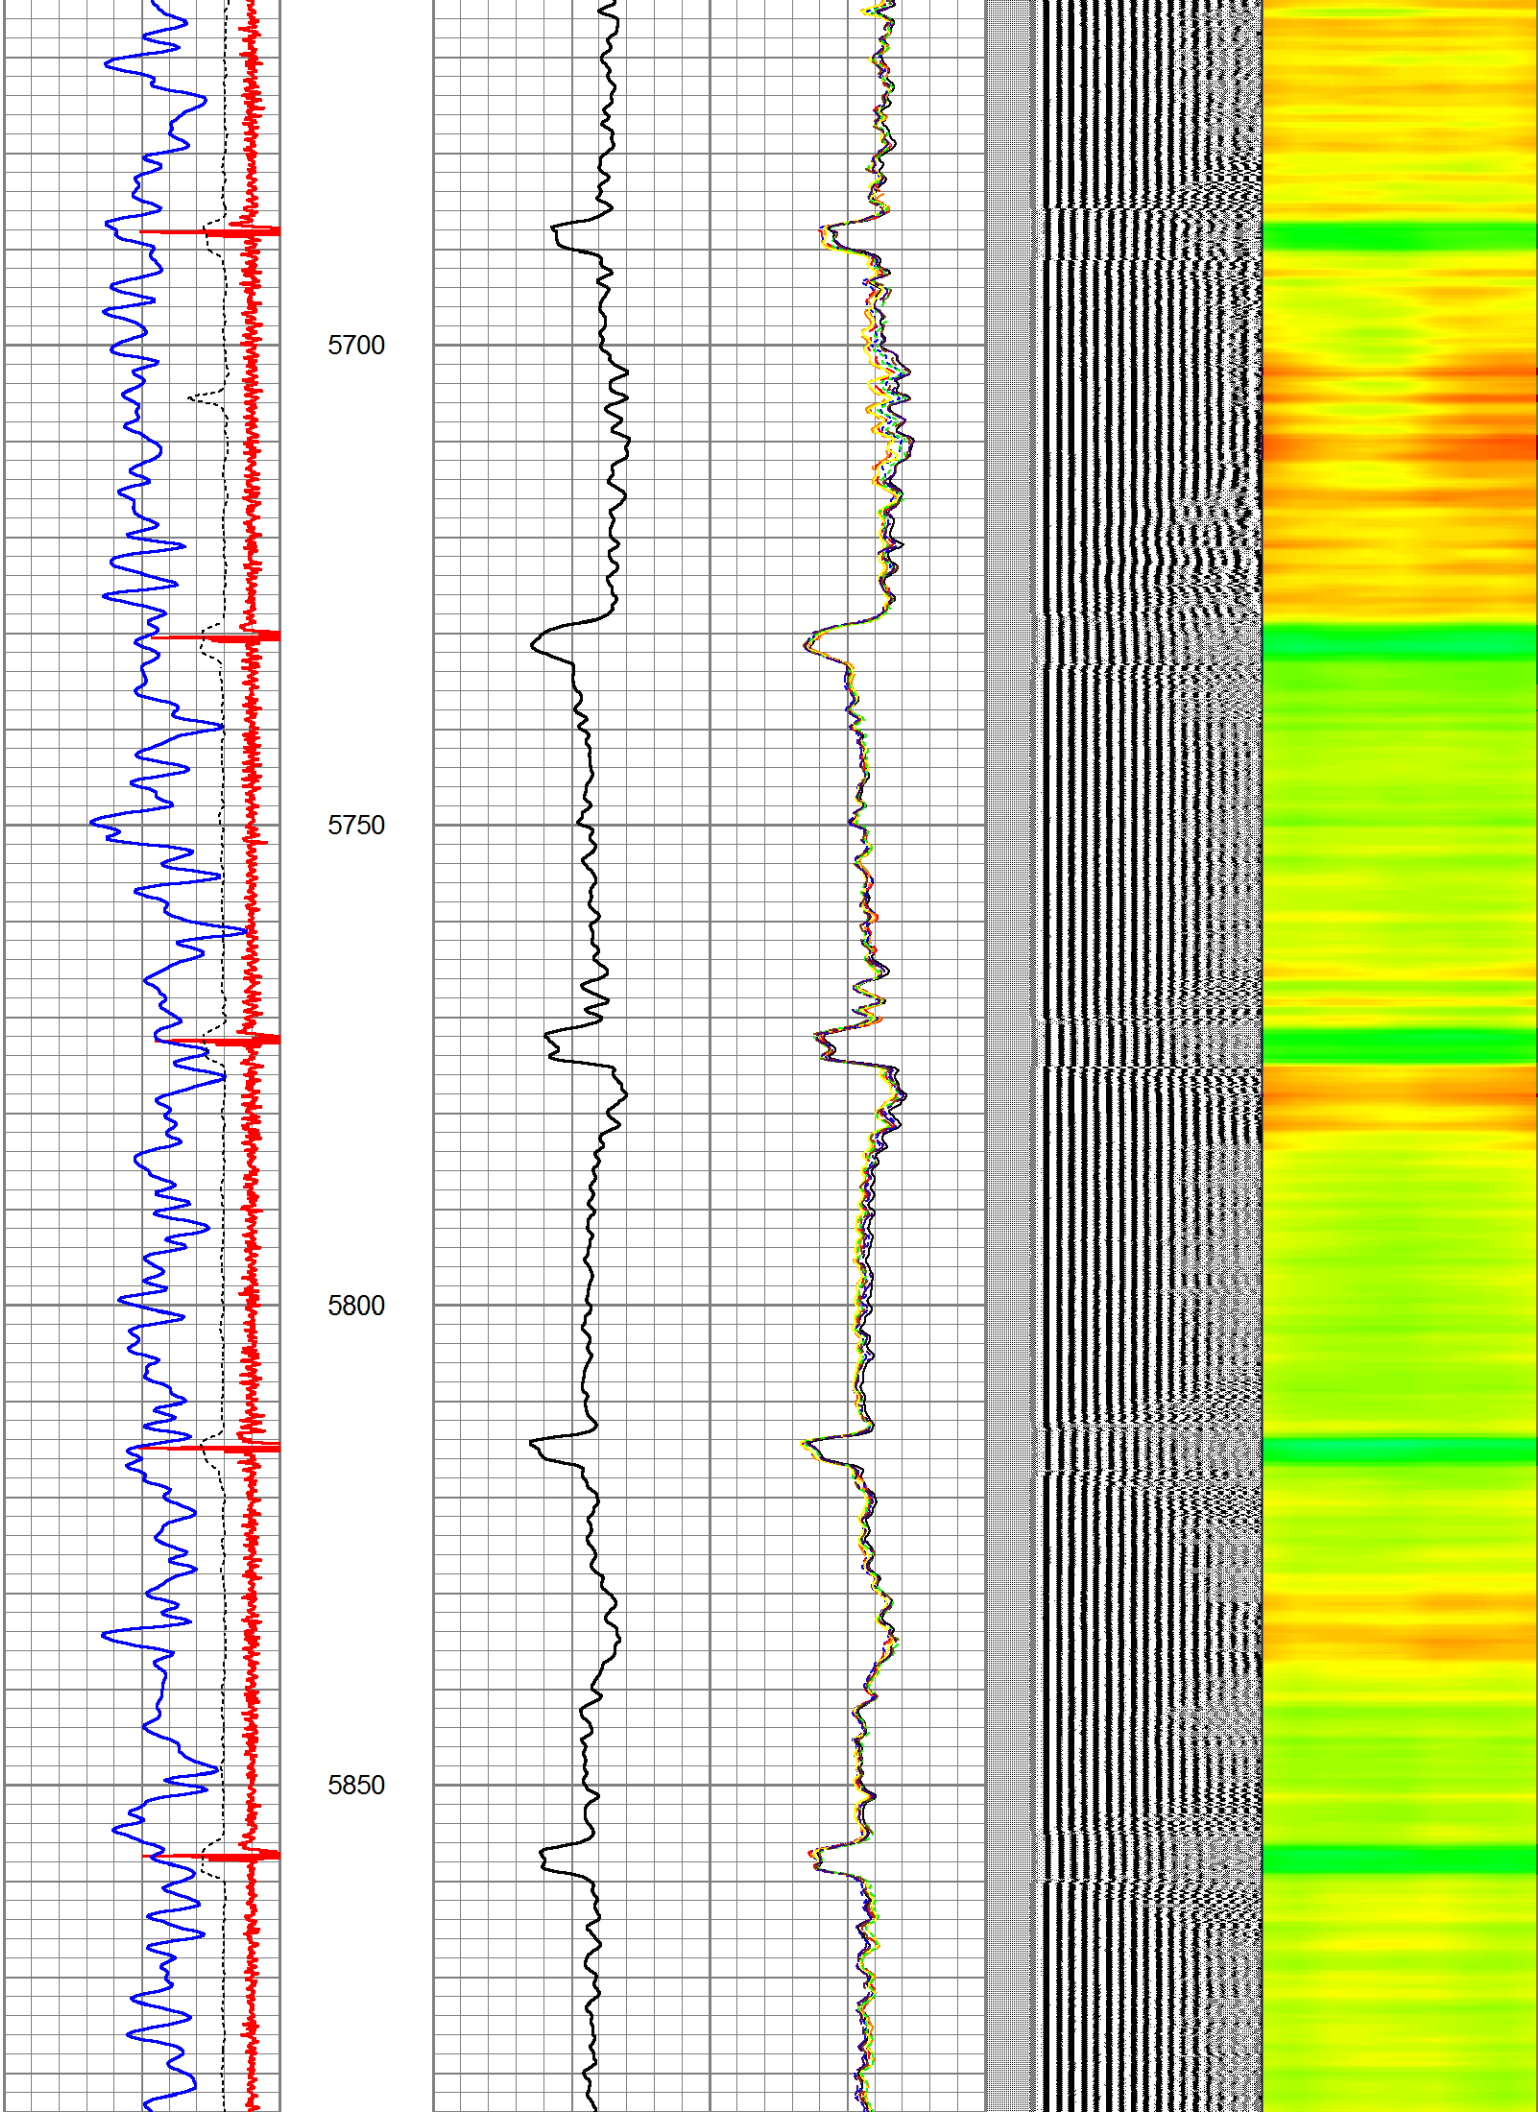

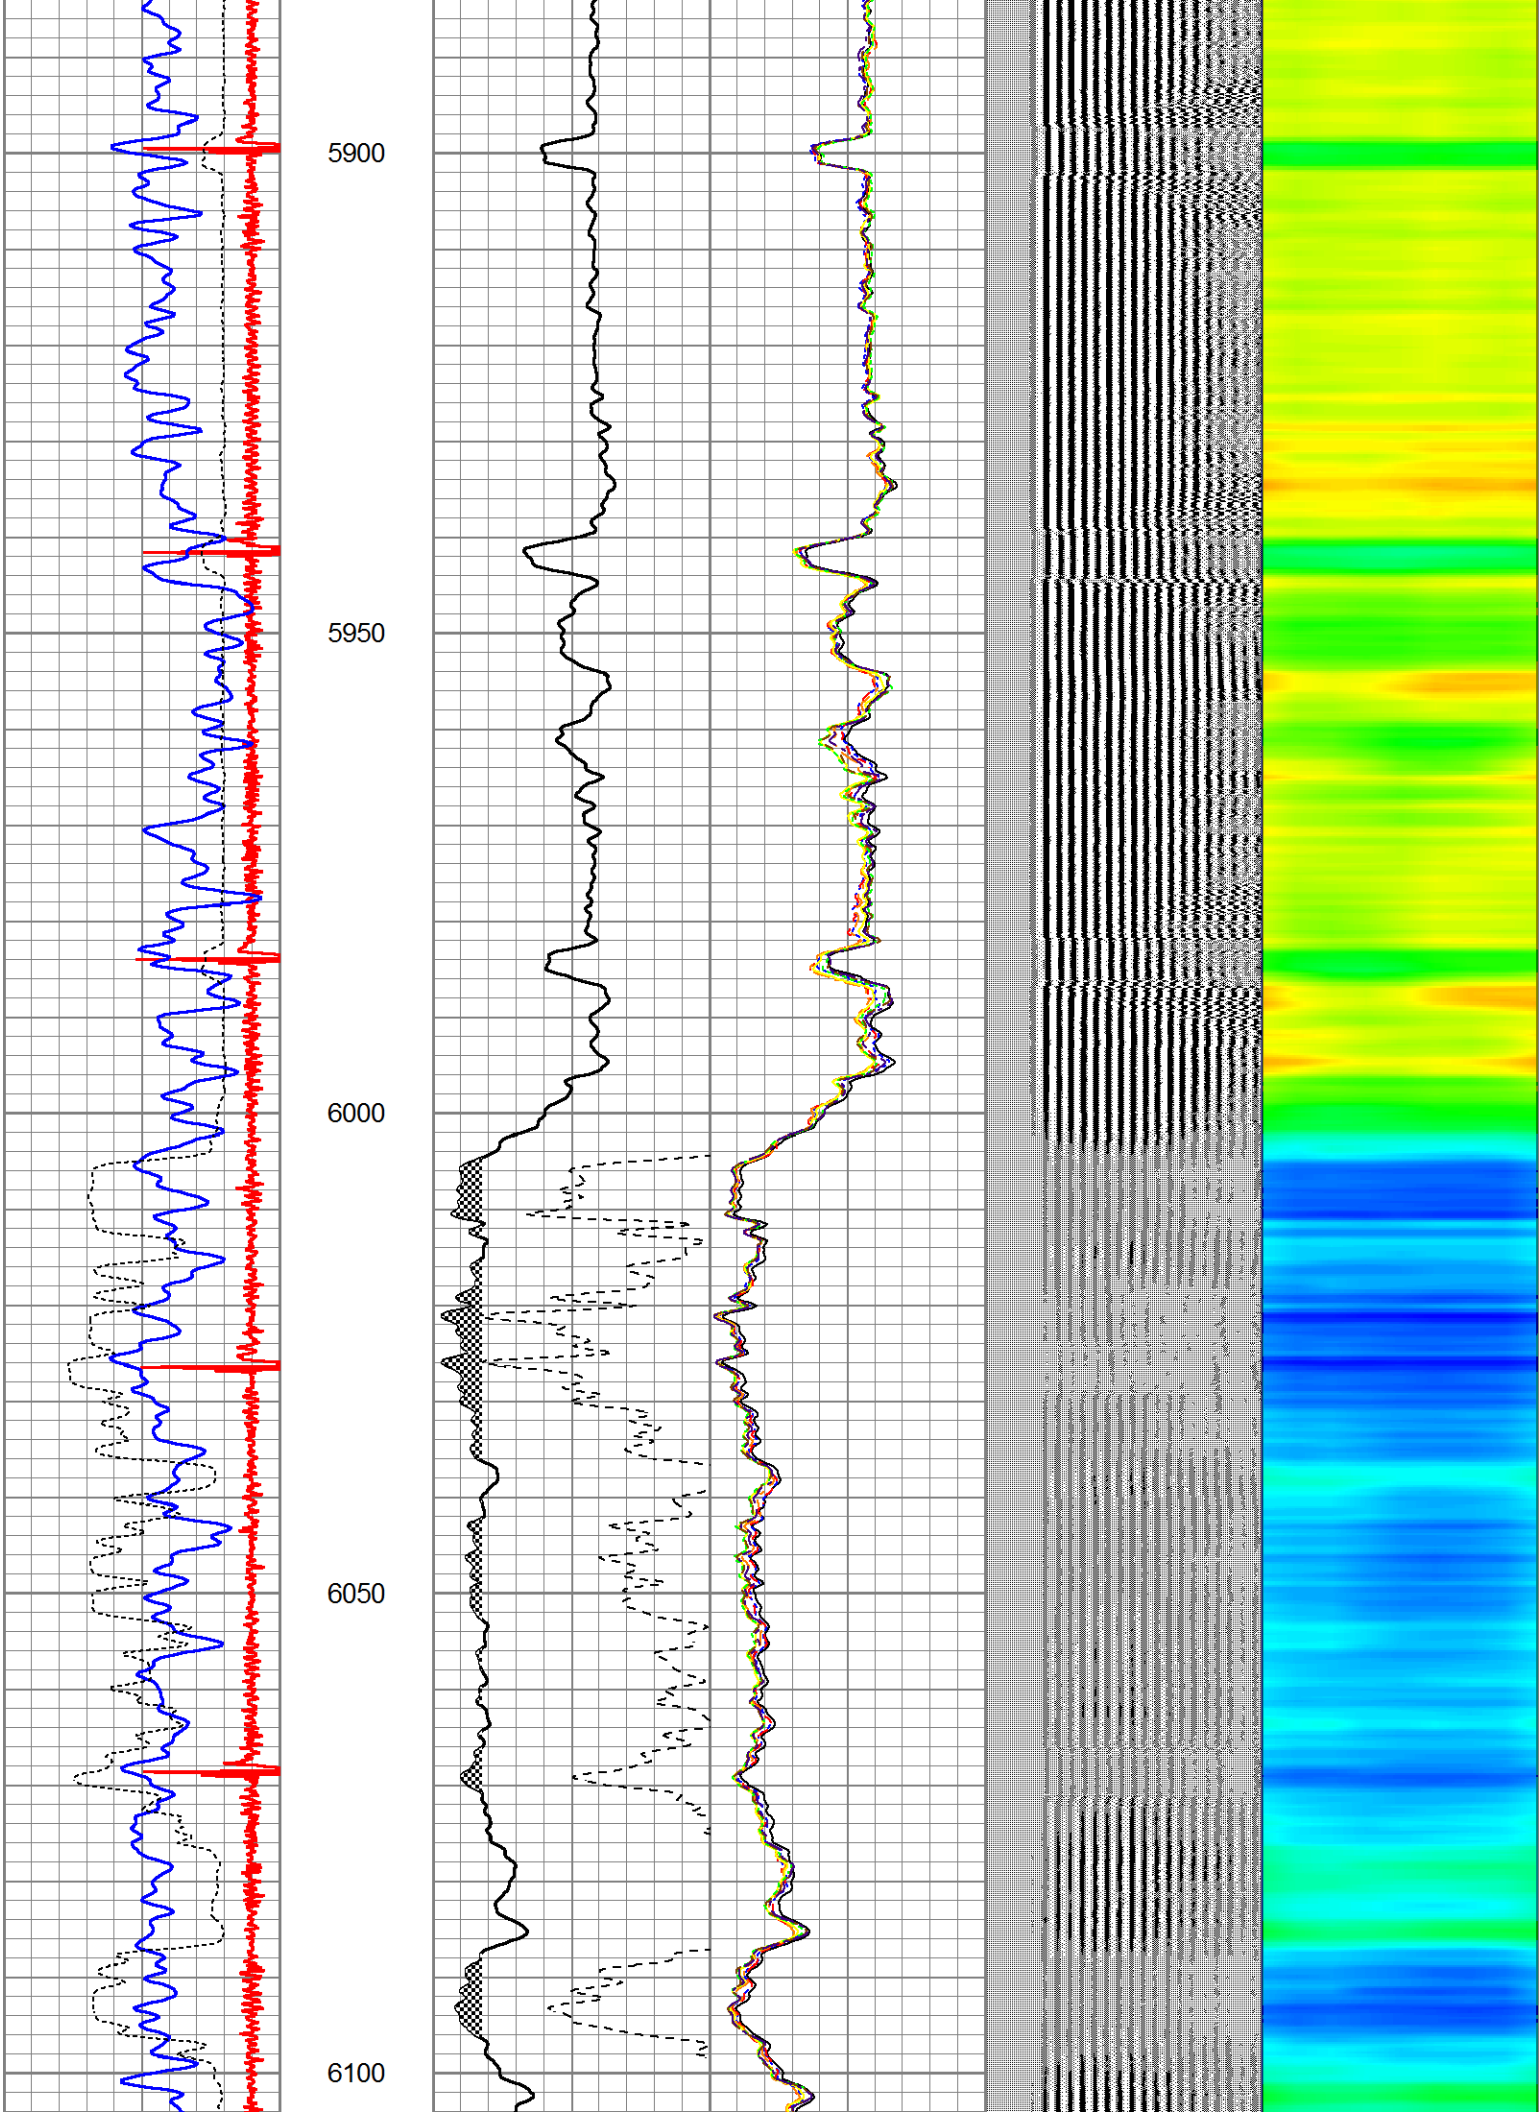



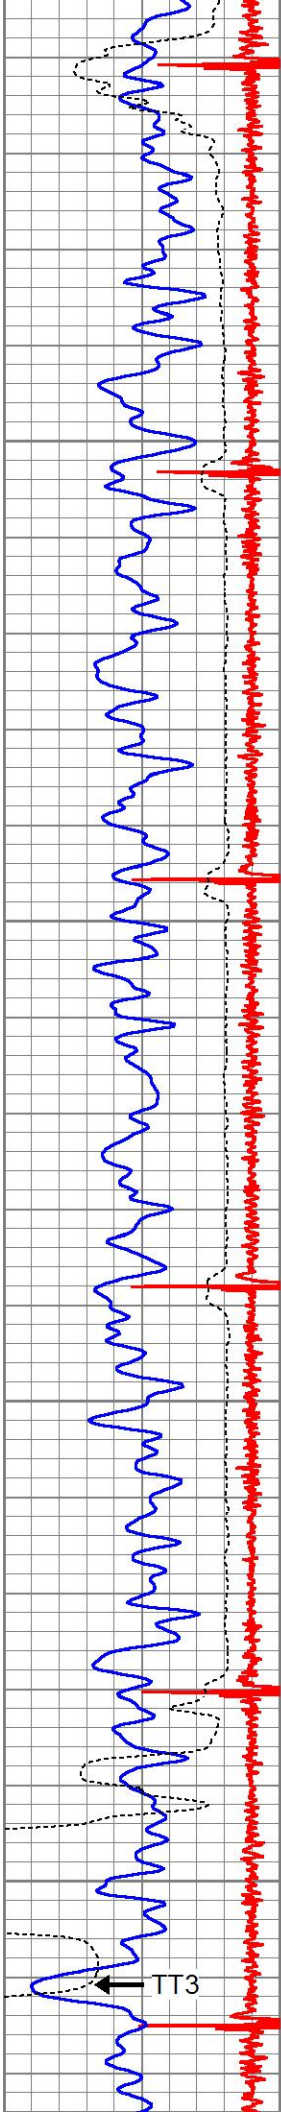



6150


6200

6250

6300

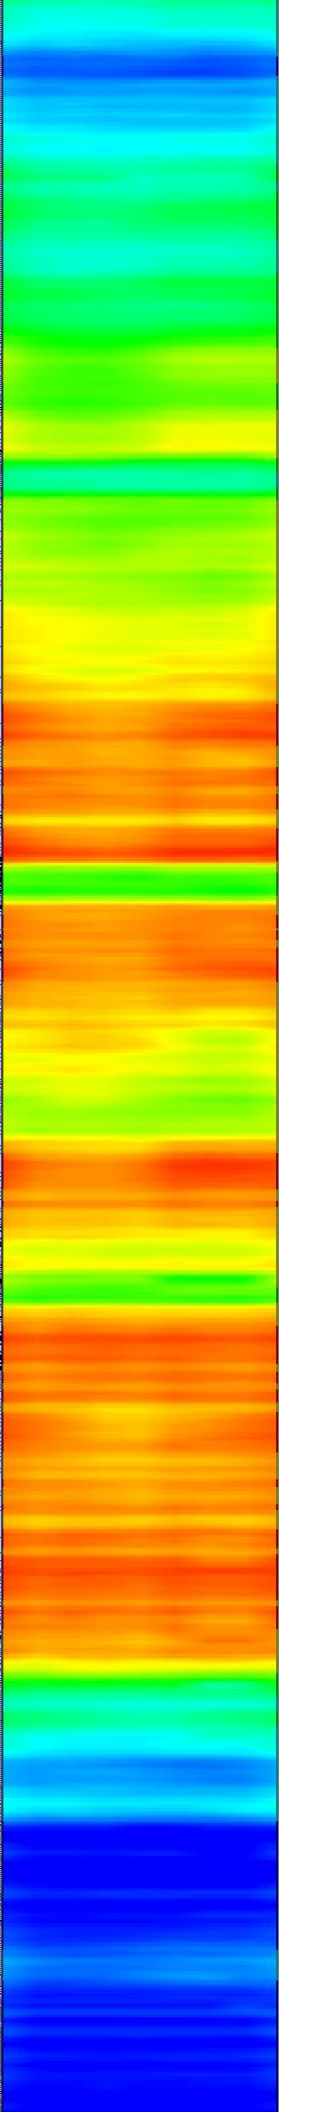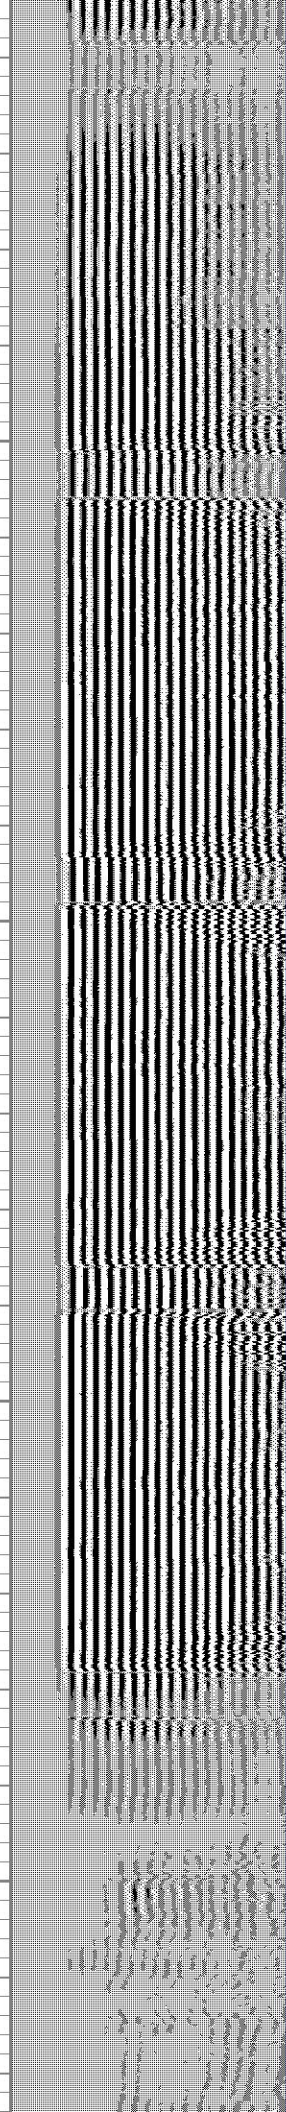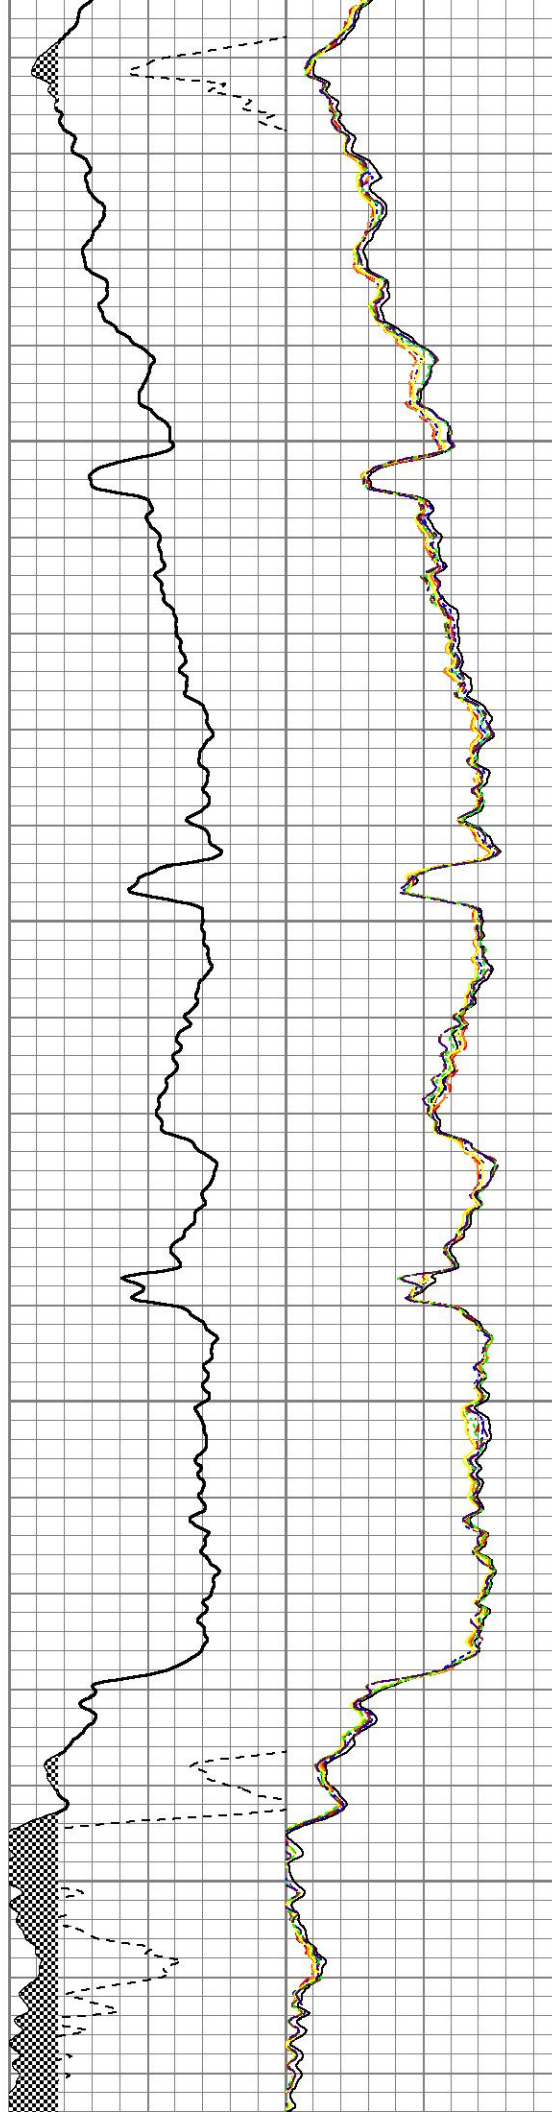

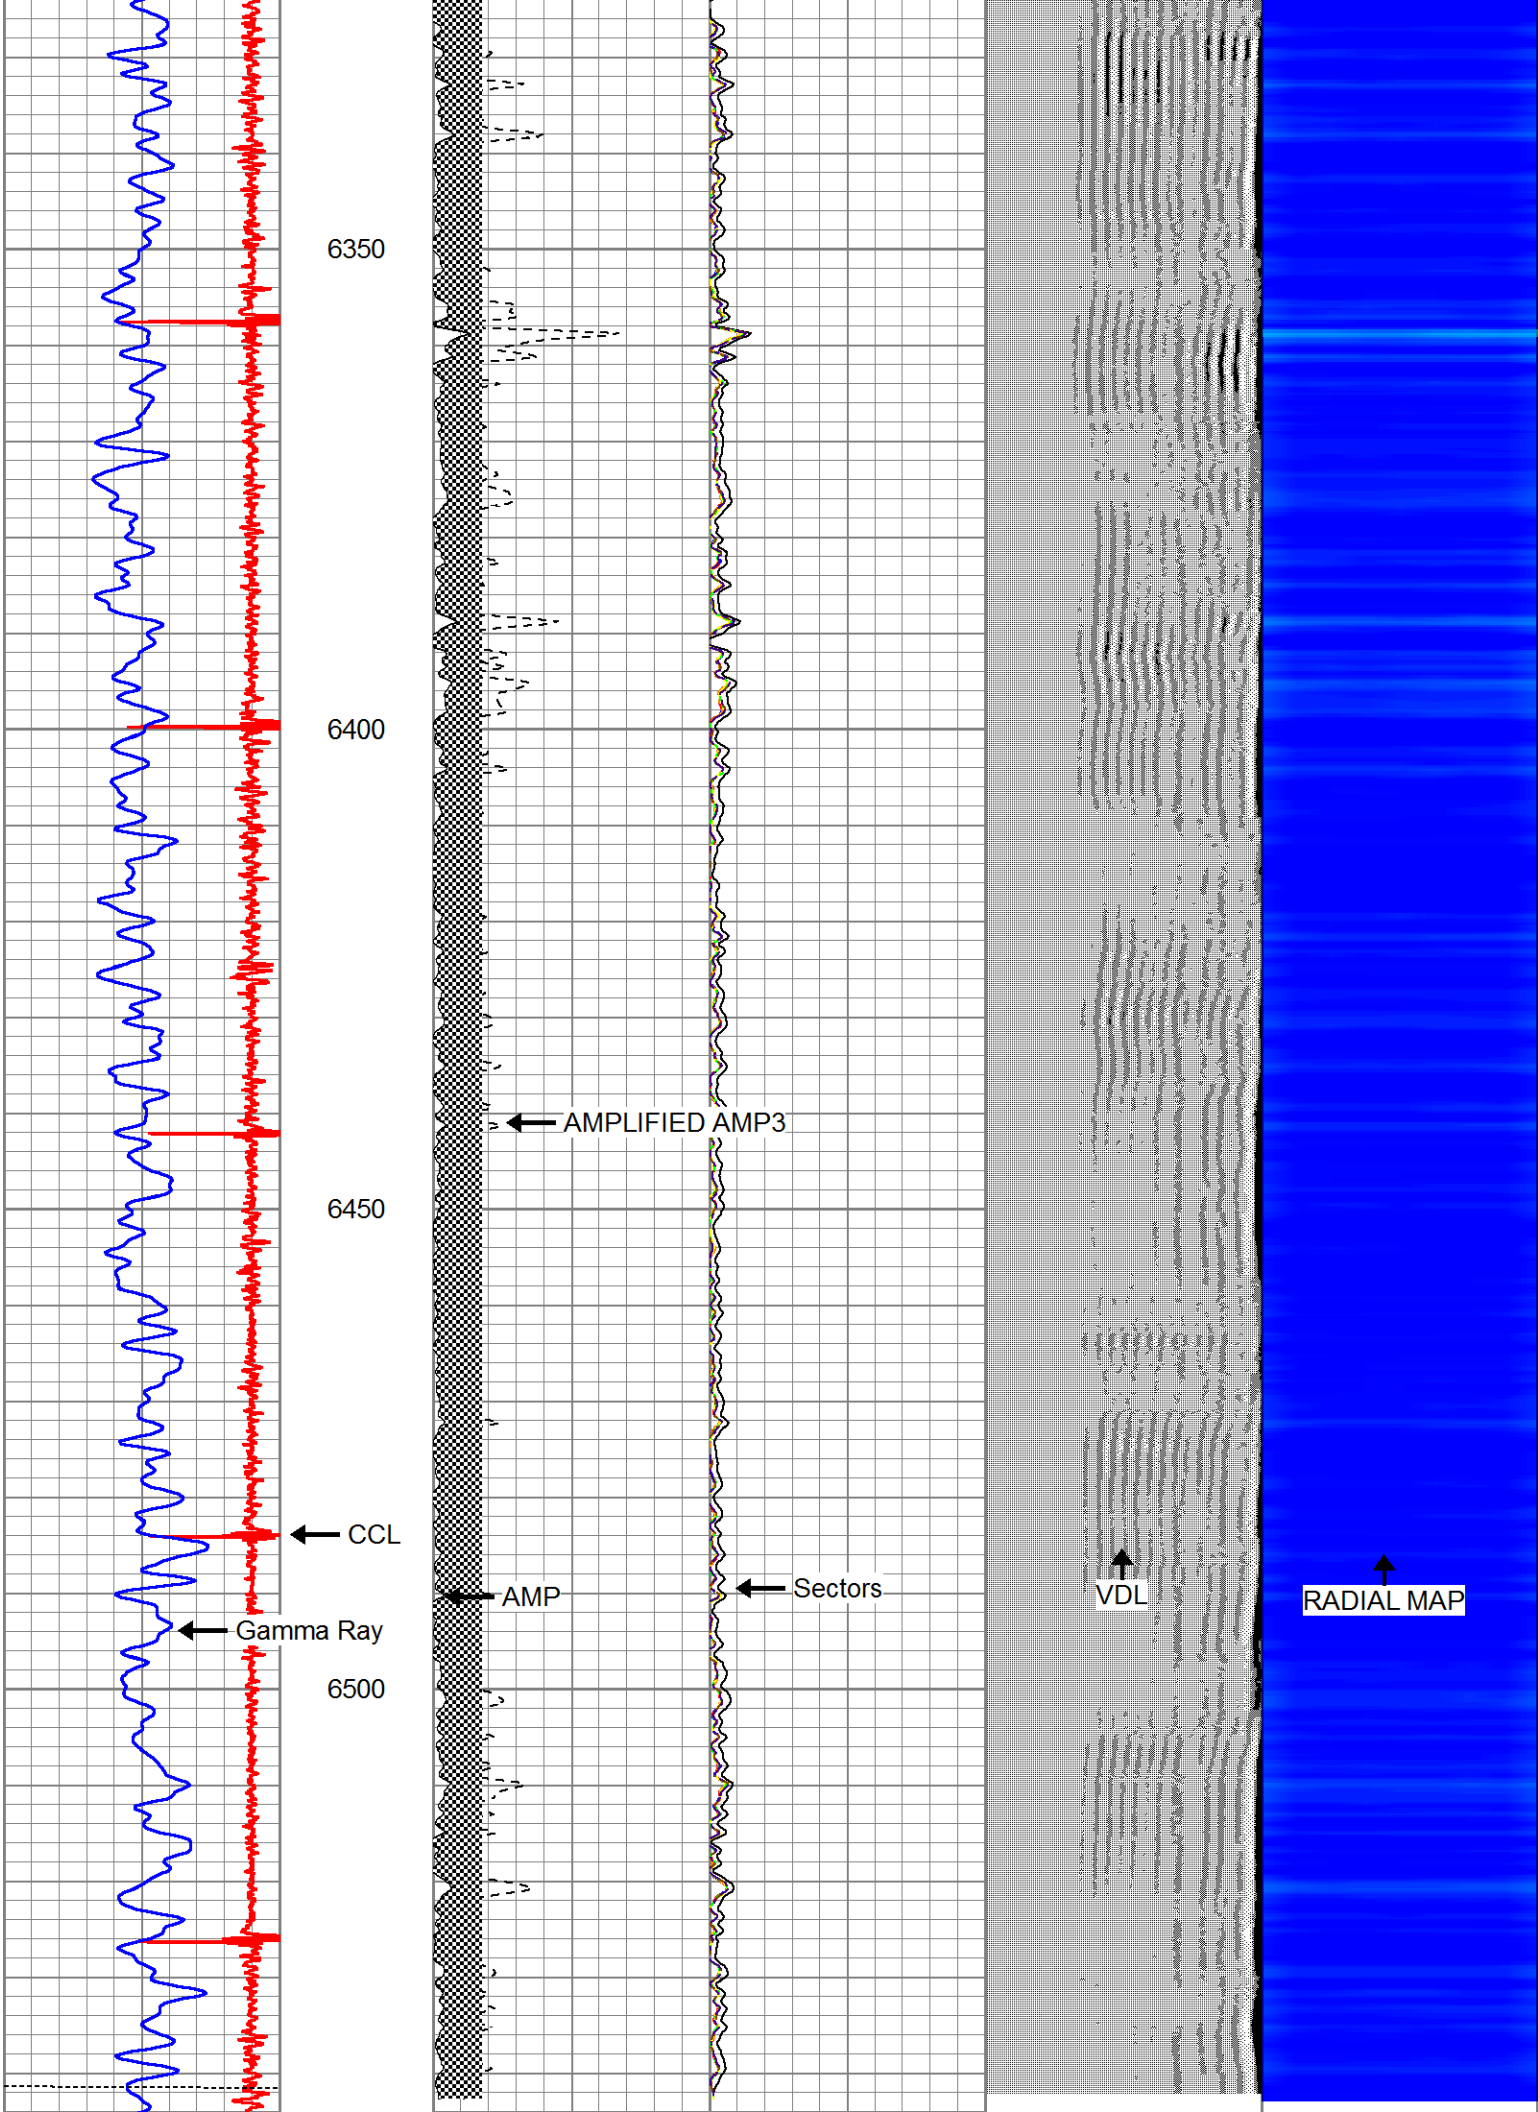

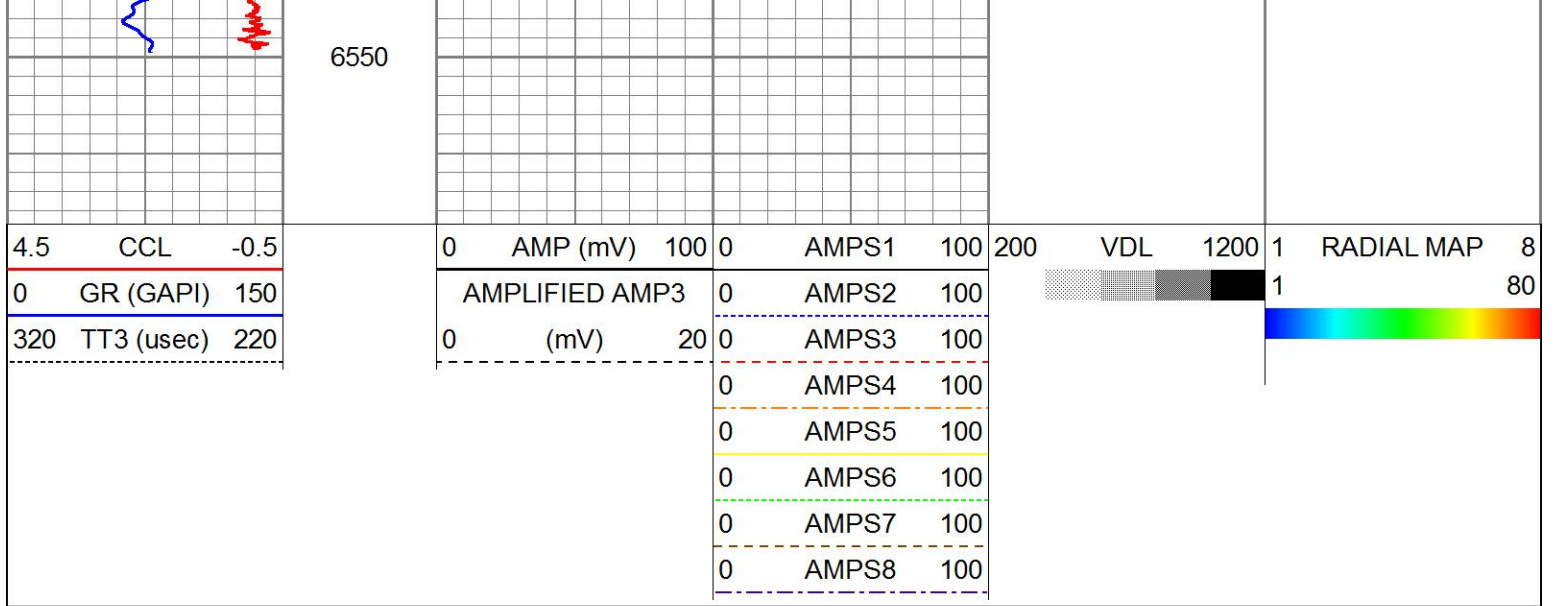

Calibration Report

Database File sekich 3-19a.db
 Dataset Pathname pass26
 Dataset Creation Mon Oct 16 12:20:34 2023

Gamma Ray Calibration Report

Type / Serial: Probe275dig / 101010

SHOP CALIBRATION

Wed Feb 27 07:52:48 2013

	Counts/Sec.	Gain	Offset	Jig	Units
Background	0.0				cps
Calibrator	1.0				cps
		0.6500			GAPI/cps

PRIMARY VERIFICATION

Background	0.0				cps
Calibrator	0.0				cps
Difference				0.0	GAPI

BEFORE SURVEY VERIFICATION

Background	0.0				cps
Calibrator	0.0				cps
Difference				0.0	GAPI

AFTER SURVEY VERIFICATION

Background	0.0				cps
Calibrator	0.0				cps
Difference				0.0	GAPI

Segmented Cement Bond Log Calibration Report

Serial Number: 101020
 Tool Model: Probe
 Calibration Casing Diameter: 4.500 in
 Calibration Depth: 65.950 ft

Master Calibration, performed Mon Oct 16 11:59:56 2023:

Raw (v)	Calibrated (mv)	Results
---------	-----------------	---------

	Zero	Cal	Zero	Cal	Gain	Offset
3'	-0.013	0.821	1.000	81.196	96.181	2.215
CAL	-0.012	0.895				
5'	-0.013	0.584	1.000	81.196	134.448	2.682
SUM						
S1	-0.012	0.790	0.000	81.196	101.234	1.249
S2	-0.013	0.807	0.000	81.196	99.041	1.242
S3	-0.013	0.853	0.000	81.196	93.861	1.174
S4	-0.012	0.885	0.000	81.196	90.456	1.119
S5	-0.013	0.890	0.000	81.196	89.903	1.146
S6	-0.012	0.830	0.000	81.196	96.421	1.191
S7	-0.013	0.792	0.000	81.196	100.863	1.267
S8	-0.013	0.775	0.000	81.196	103.069	1.288

Internal Reference Calibration, performed Tue Feb 12 12:45:01 2013:

	Raw (v)		Calibrated (v)		Results	
	Zero	Cal	Zero	Cal	Gain	Offset
CAL	0.000	0.000	-0.012	0.895	1.000	0.000

Air Zero Calibration, performed Thu Feb 21 13:40:31 2013:

	Raw (v)		Calibrated (v)		Results	
	Zero		Zero		Offset	
3'	0.000		0.000		0.000	
5'	0.000		0.000		0.000	
SUM						
S1	0.000		0.000		0.000	
S2	0.000		0.000		0.000	
S3	0.000		0.000		0.000	
S4	0.000		0.000		0.000	
S5	0.000		0.000		0.000	
S6	0.000		0.000		0.000	
S7	0.000		0.000		0.000	
S8	0.000		0.000		0.000	