




**OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO**

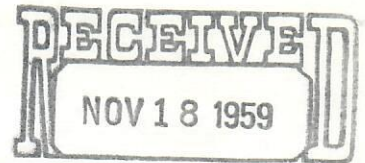

OIL & GAS

CONSERVATION COMMISSION

SUNDRY NOTICES AND REPORTS ON WELLS

SCANNED

INSTRUCTIONS

Notice must be given to the Director, and approval obtained in advance of the time when the owner or operator expects to recomplete or abandon a well or to change plans. Within thirty (30) days after recompletion, change of plans, or remedial work, a detailed report of the work done and the results obtained shall be submitted on this form in duplicate for wells on Patented and Federal lands, and in triplicate for wells on State lands. In work that affects only rods, pumps or tubing or other routine work such as, but not limited to, cleaning out to previous total depth, no report is necessary.

Notice of Intention to Recomplete	<input type="checkbox"/>	Report of Remedial Work	<input type="checkbox"/>
Notice of Intention to Change Plans	<input type="checkbox"/>	Report of Recompletion	<input type="checkbox"/>
Notice of Intention to Abandon Well	<input checked="" type="checkbox"/>	Other	<input type="checkbox"/>

(Check appropriate space)

LEASE NAME George Drum WELL NO. 1

FIELD Barrow WILDCAT COUNTY Washington

LOCATION C NW NE Section 5 Township 2N Range 53W Meridian 6th
(Quarter Quarter)

645 feet from N Section Line and 1977 feet from E Section Line
N or S E or W

(DETAILS OF WORK)

Pan American drilled subject well to a total depth of 4950. Plugged back depth is 4538.

Uneconomical to produce well because commercial quantities of oil and/or gas cannot be produced.

Proposed 4-1/2" casing recovery program:

1. Determine free point with free point indicator.
2. Place 16 sacks of cement in bottom of 4-1/2" casing.
3. Shoot off casing and recover the maximum amount obtainable.

Proposed Plugging Program:

1. Place five sacks of cement at the surface casing shoe at 203 ft. RDB.
2. Cement top of surface casing with 10 sacks of cement.
3. Install permanent marker consisting of a piece of pipe not less than four inches in diameter of which 4 ft. will be above ground level and 6 ft. imbedded in cement in the surface casing.
4. The location will be leveled and restored to its original contours.

AJJ	
DVR	
WRS	
HHM	
JAM	
FJP	
JJD	<input checked="" type="checkbox"/>
FILE	

I/We hereby swear (or affirm) that the statements herein made are a full and correct report.

APPROVED:

Company Pan American Pet. Corp. Date 11-13-59

Date NOV 18 1959

Address Box 1031

Phone No. BE 5-4603

Director A. J. Garcia

By S. A. Avila
(Signature)

Title Area Supt.

✓