


**NOTES:**

No hydraulic fracturing stimulations completions and no flowback anticipated therefor flowback diagram is not necessary.


Design flow rate: 0.5 MMSCFD  
Expected Helium Recovery: 90%  
Facility Pad: 200' x 200'

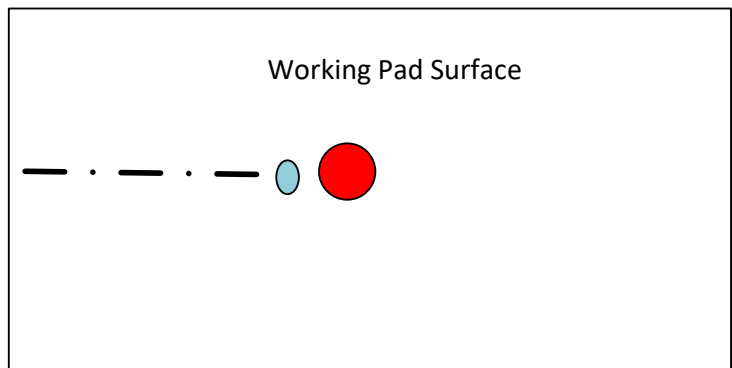



4" or larger buried polyethylene flowline.

Flowlines will carry the product to a skid-mounted helium gas processing and storage unit on private surface.

BNL (Enterprise) Inc.  
**Jackson 02 L4 3154**  
Section 2 T31S R54W  
37.377597, -103.443727  
**Preliminary Process Flow Diagram**

 Orbit valve to manually shut in well

 Wellhead

 Flowline