


NOTES:

No hydraulic fracturing stimulations completions and no flowback anticipated therefor flowback diagram is not necessary.


Design flow rate: 0.5 MMSCFD
Expected Helium Recovery: 90%
Facility Pad: 200' x 200'

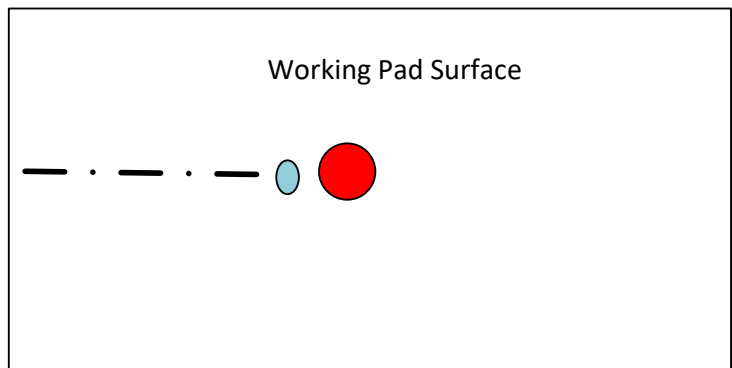



4" or larger buried polyethylene flowline.

Flowlines will carry the product to a skid-mounted helium gas processing and storage unit on private surface.

BNL (Enterprise) Inc.
Jackson 27 SWSE 3054
Section 27 T30S R54W
37.397895, -103.447426
Preliminary Process Flow Diagram

 Orbit valve to manually shut in well

 Wellhead

 Flowline