


Current Wellbore Schematic

Well Name: Speaker 1
 Location: 660' FNL, 660' FEL, NENE Sec 24, T7N, R60W
 County: Weld
 API #: 05-123-10255
 Co-ordinates: 40.566086 / -104.03378
 Elevations: GROUND: 4880'
 KB: 4892'
 Depths (KB): PBTD: 6858'
 TD: 6921'

Date Prepared: 6/27/2025
 Last Updated: 6/27/2025
 Spud Date: 6/15/1981
 Completion Date: 12/3/1981
 Last Workover Date: 12/3/1981
 Prepared by: Jake Van Bramer
 Updated by: --

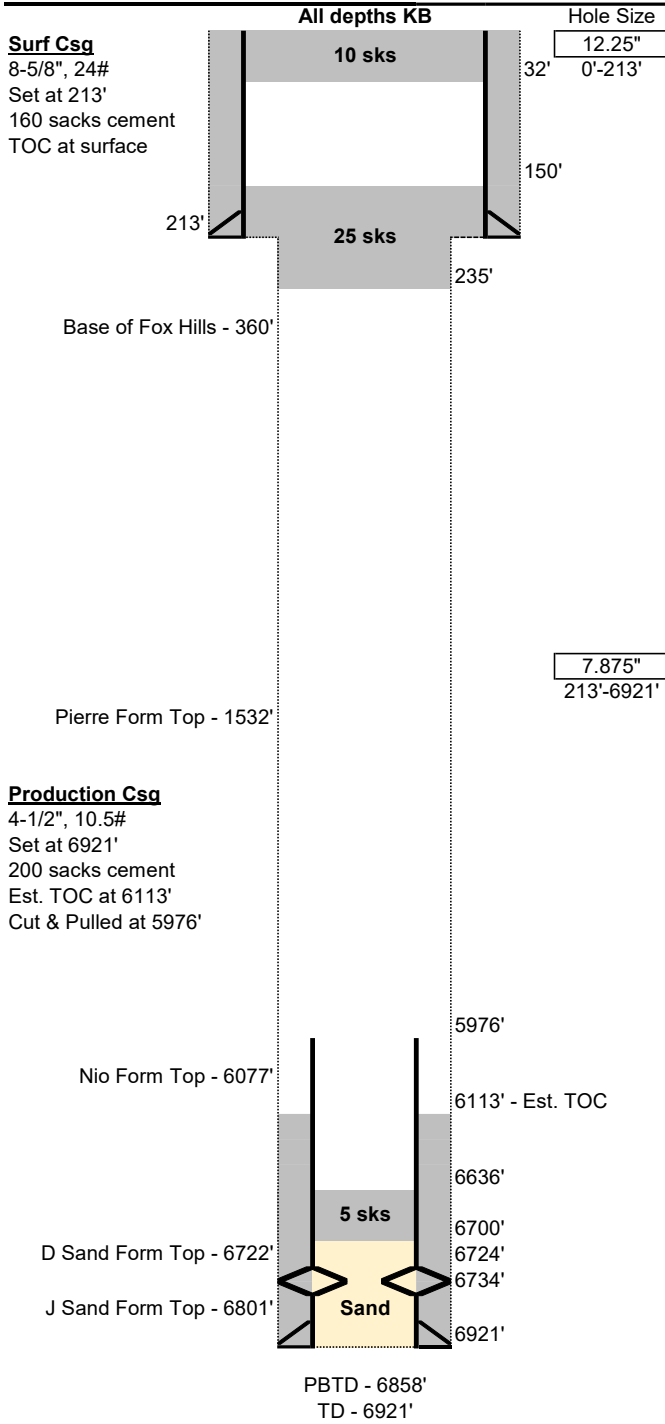

Surface Casing:
 Drilled 12-1/4" surface hole to 213'
 Set 8-5/8", 24# casing at 213'
 Cemented with 160 sks
 TOC at surface

Production Casing:
 Drilled 7-7/8" surface hole to 6,921'
 Set 4-1/2", 10.5# casing at 6,921'
 Cemented with 200 sks
 Est. TOC at 6,113' (calculated)
 Cut & pulled at 5,976' during original abandonment

Open Hole:
 7-7/8" Open Hole from 213'-5,976', expected to be washed out

Tubing:
 None

Rods:
 None

Perforations:
 52 Holes (4SPF) from 6724'-6737'

P&A Plugs:

- 10 sks from 32' to surface
- 25 sks from 150'-235'
- 5 sks from 6,636'-6,700'

Additional Notes:
 Dumped Sand from 6,921' to 6,700' during original abandonment

Initial Potential Test:
 None


Formation Tops:

Base of the Fox Hills	360'
Pierre	1532'
Niobrara	6077'
D Sand	6722'
J Sand	6801'

Proposed Wellbore Schematic

Well Name: Speaker 1
 Location: 660' FNL, 660' FEL, NENE Sec 24, T7N, R60W
 County: Weld
 API #: 05-123-10255
 Co-ordinates: 40.566086 / -104.03378
 Elevations: GROUND: 4880'
 KB: 4892'
 Depths (KB): PBTD: 6858'
 TD: 6921'

Date Prepared: 6/27/2025
 Last Updated: 6/27/2025
 Spud Date: 6/15/1981
 Completion Start Date: 12/3/1981
 Last Workover Date: 12/3/1981
 Prepared by: Jake Van Bramer
 Updated by: --

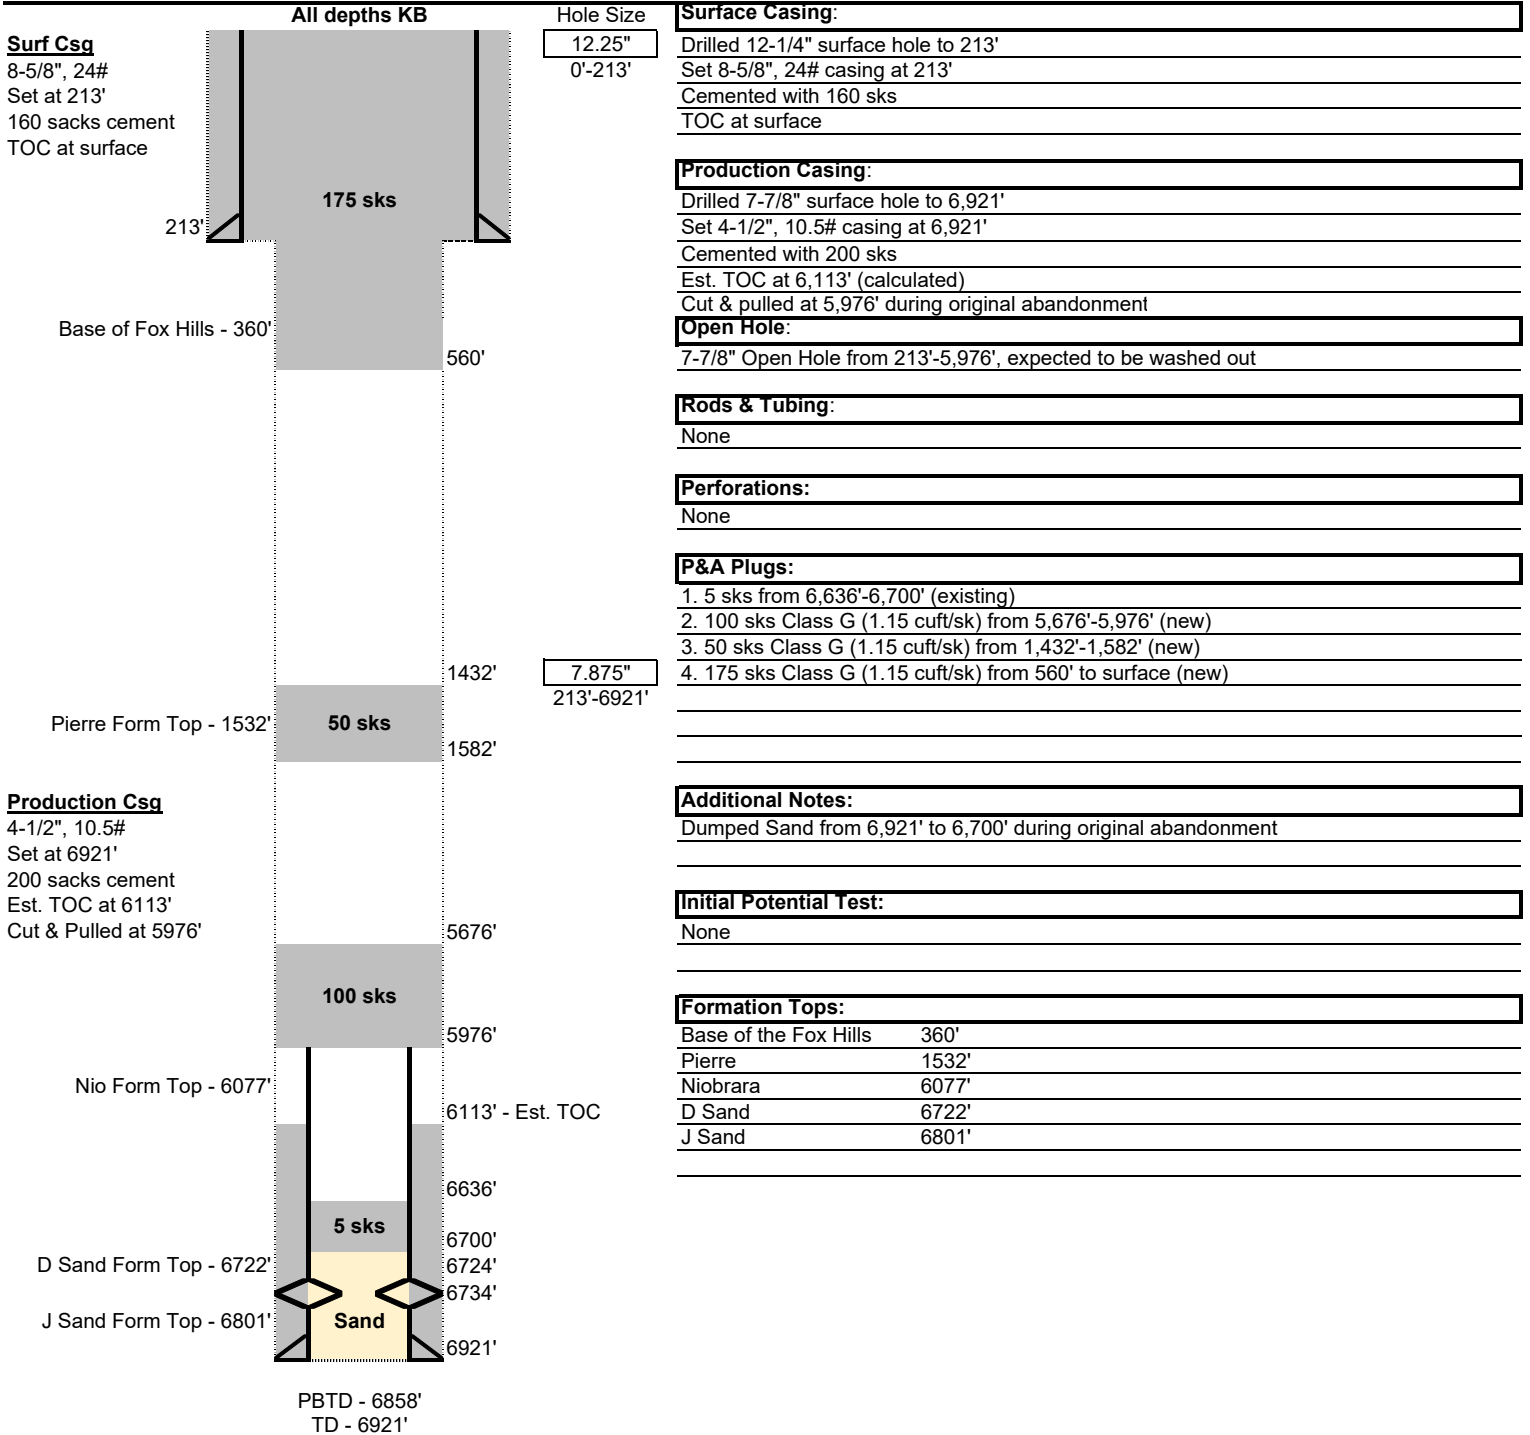

Surface Casing:
 Drilled 12-1/4" surface hole to 213'
 Set 8-5/8", 24# casing at 213'
 Cemented with 160 sks
 TOC at surface

Production Casing:
 Drilled 7-7/8" surface hole to 6,921'
 Set 4-1/2", 10.5# casing at 6,921'
 Cemented with 200 sks
 Est. TOC at 6,113' (calculated)
 Cut & pulled at 5,976' during original abandonment

Open Hole:
 7-7/8" Open Hole from 213'-5,976', expected to be washed out

Rods & Tubing:
 None

Perforations:
 None

P&A Plugs:

- 5 sks from 6,636'-6,700' (existing)
- 100 sks Class G (1.15 cuft/sk) from 5,676'-5,976' (new)
- 50 sks Class G (1.15 cuft/sk) from 1,432'-1,582' (new)
- 175 sks Class G (1.15 cuft/sk) from 560' to surface (new)

Additional Notes:
 Dumped Sand from 6,921' to 6,700' during original abandonment

Initial Potential Test:
 None

Formation Tops:

Base of the Fox Hills	360'
Pierre	1532'
Niobrara	6077'
D Sand	6722'
J Sand	6801'