01309625

FINAL PRINT
Schlumberger

DUAL INDUCTION - SFL - GR

CSU

COMPANY: CHAMPLIN PETROLEUM COMPANY

WELL: #5 SAYLES 24-29

FIELD: SIANNA
COUNTY: CHEYENNE
STATE: COLORADO

(14)

LOCATION: SE SW

SEC: 29 TWP: 13 S RGE: 47 W

RECEIVED
JUL 30 1985
COLO. OIL & GAS CONS. COMM.

OTHER SERVICES-
BHC
LDL/CNL

PERMANENT DATUM: GL
ELEV. OF PERM. DATUM: 4327.0 F
LOG MEASURED FROM: KB
10.0 F ABOVE PERM. DATUM
DRLG. MEASURED FROM: KB

ELEVATIONS-
KB: 4337.0 F
DF: 4336.0 F
GL: 4327.0 F

PROGRAM
TAPE NO:
26.2
SERVICE
ORDER NO:
458215

DATE: 24 JUL 85
RUN NO: 1

BEST IMAGE
AVAILABLE

DEPTH-DRILLER: 5450.0 F
DEPTH-LOGGER: 5449.0 F
BTM. LOG INTERVAL: 5443.0 F
TOP LOG INTERVAL: .0 F

CASING-DRILLER: 333 F
CASING-LOGGER: 333 F
CASING: 8 5/8
WEIGHT: 24.00 LB/F
BIT SIZE: 7 7/8

TIGHT HOLE

TYPE FLUID IN HOLE: FRESH
DENSITY: 9.2 LB/G
VISCOSITY: 76.0 S
PH: 9.5
FLUID LOSS: 9.6 C3
SOURCE OF SAMPLE: FLOW LINE
RM: 1.600 OHMM AT 72.0 DEGF
RMF: 1.140 OHMM AT 72.0 DEGF
RMC: AT
SOURCE RMF/RMC: PRESS/HONE
RM AT BHT: .859 OHMM AT 140. DEGF
RMF AT BHT: .612 OHMM AT 140. DEGF
RMC AT BHT: AT 140. DEGF

TIME CIRC. STOPPED: 00:30 7-24
TIME LOGGER ON BTM.: 03:20 7-24

MAX. REC. TEMP: 140.0 DEGF

LOGGING UNIT NO: 8298
LOGGING UNIT LOC: FORT MORGAN, CO
RECORDED BY: D. HAUGEN
WITNESSED BY: D. JOHNSON & B. COOPER

REMARKS:

DUAL INDUCTION AND SONIC RUN IN COMBINATION
1.5" STANDOFF AND BASKET HOSE USED ON DUAL INDUCTION

EQUIPMENT NUMBERS-
CPU CB[illegible]

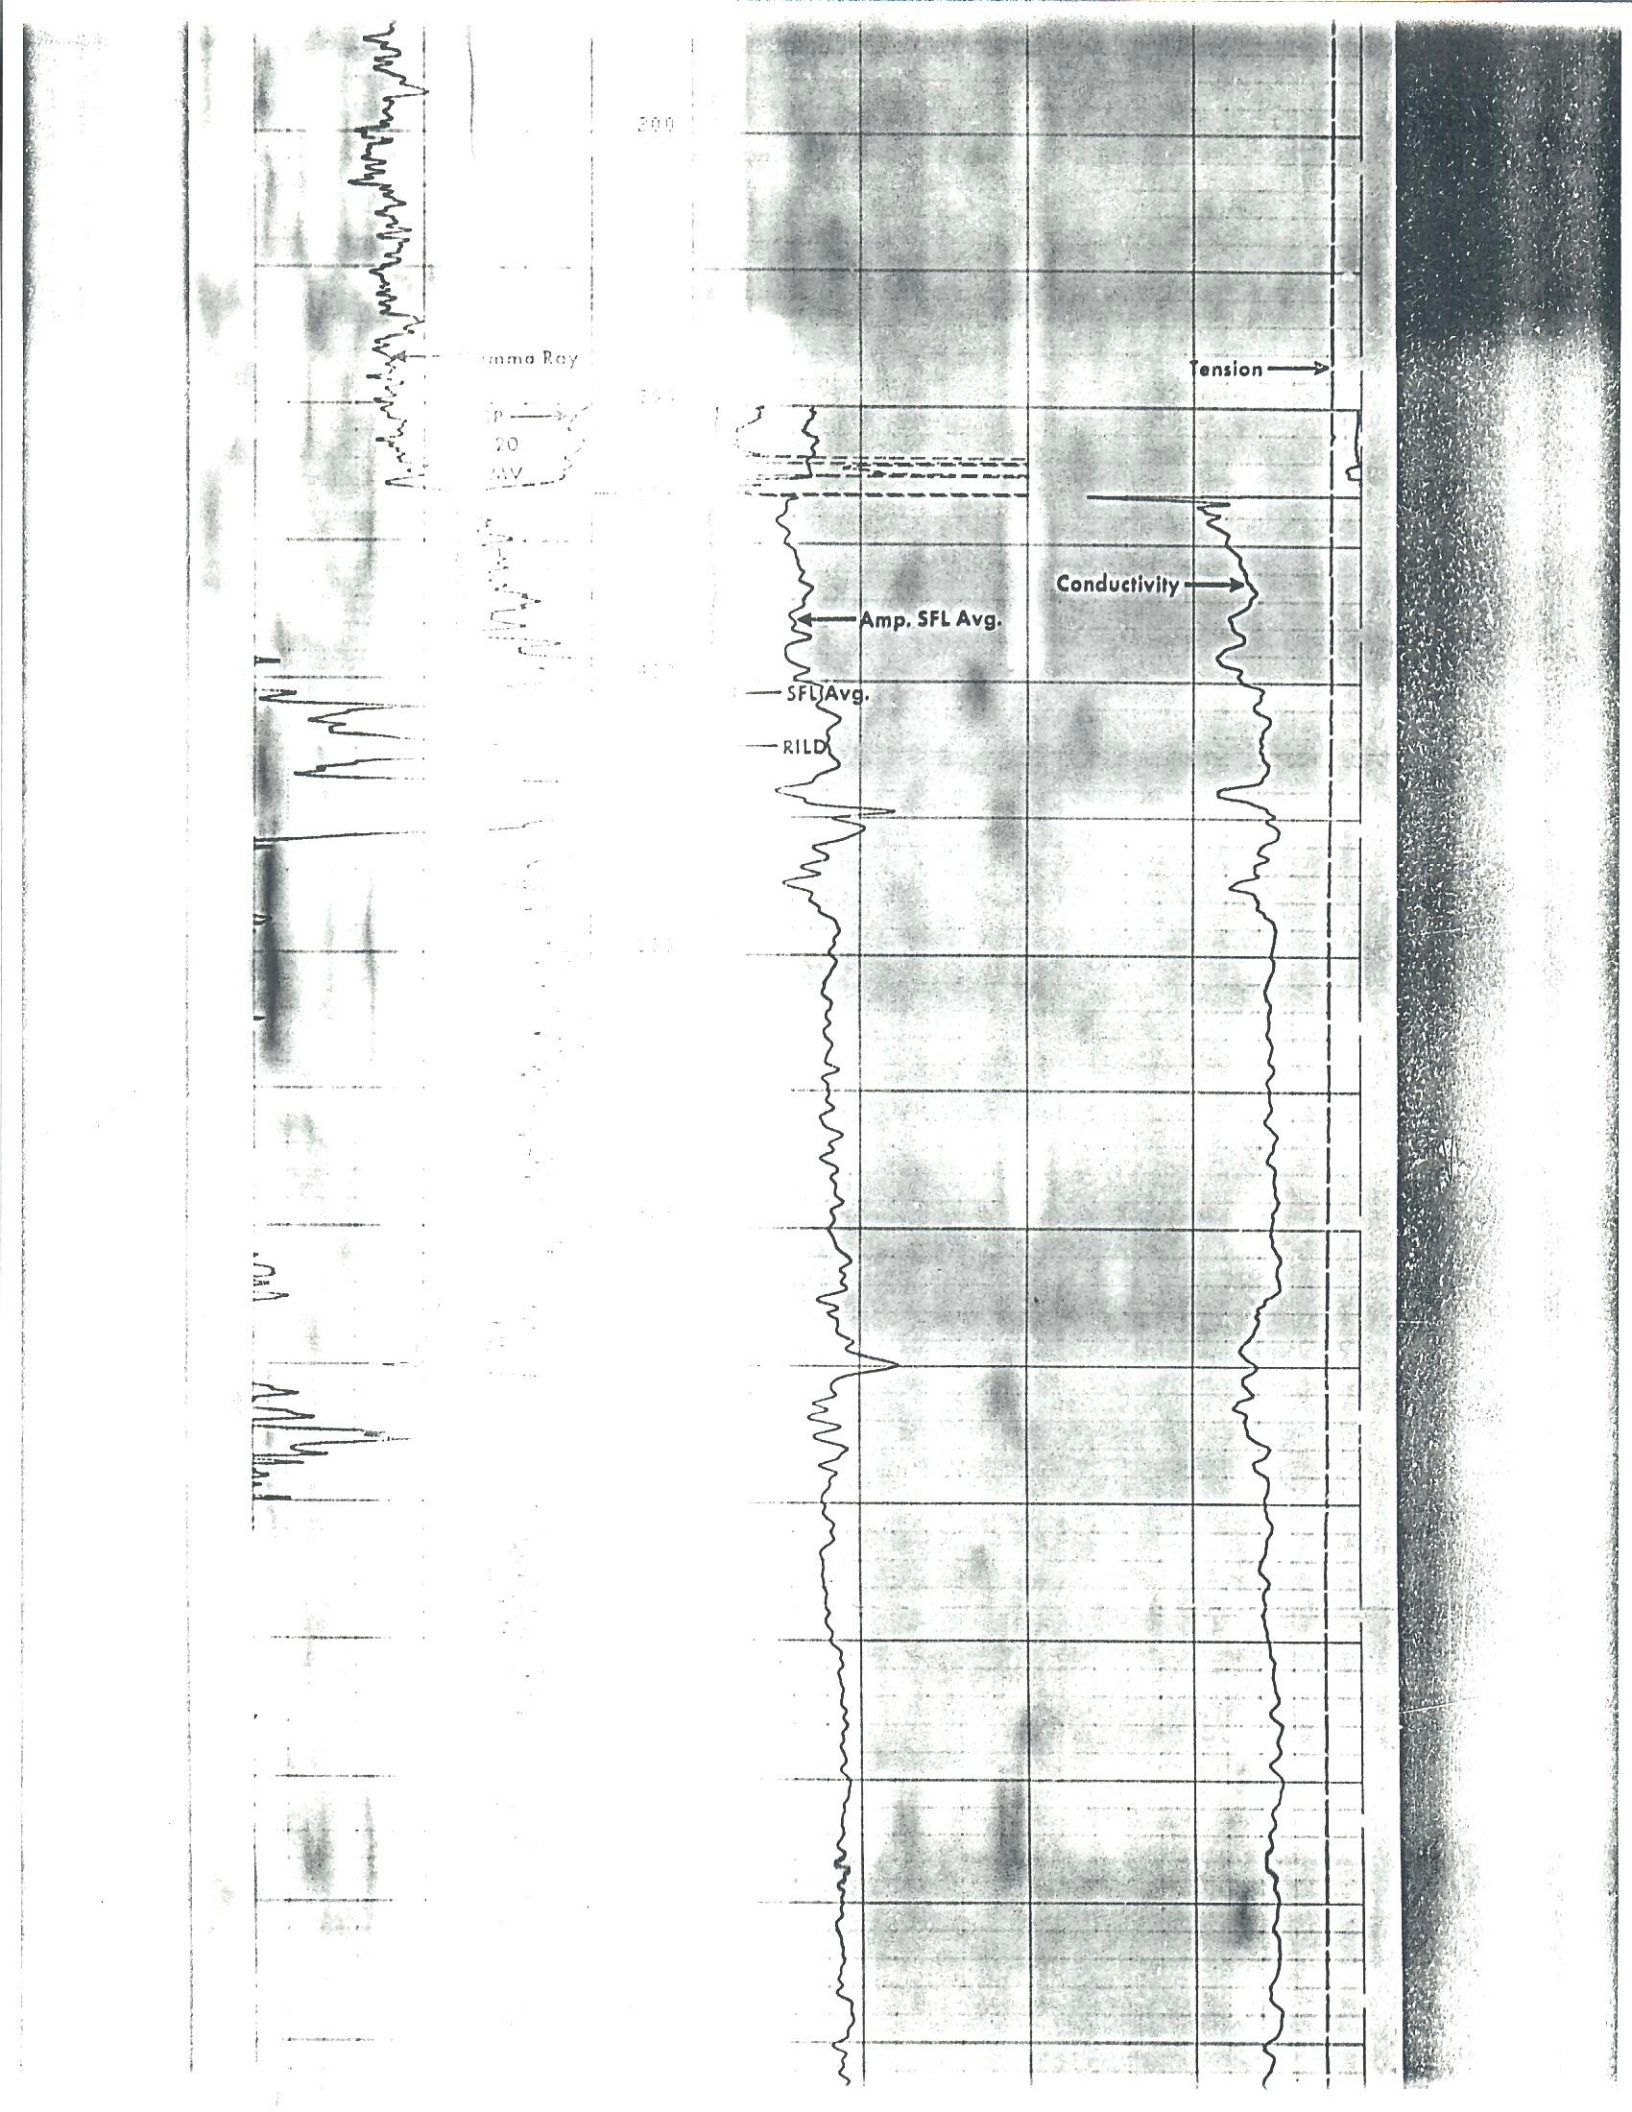
Tension
Conductivity
Amp. SFL Avg.
SFL Avg.
RILD

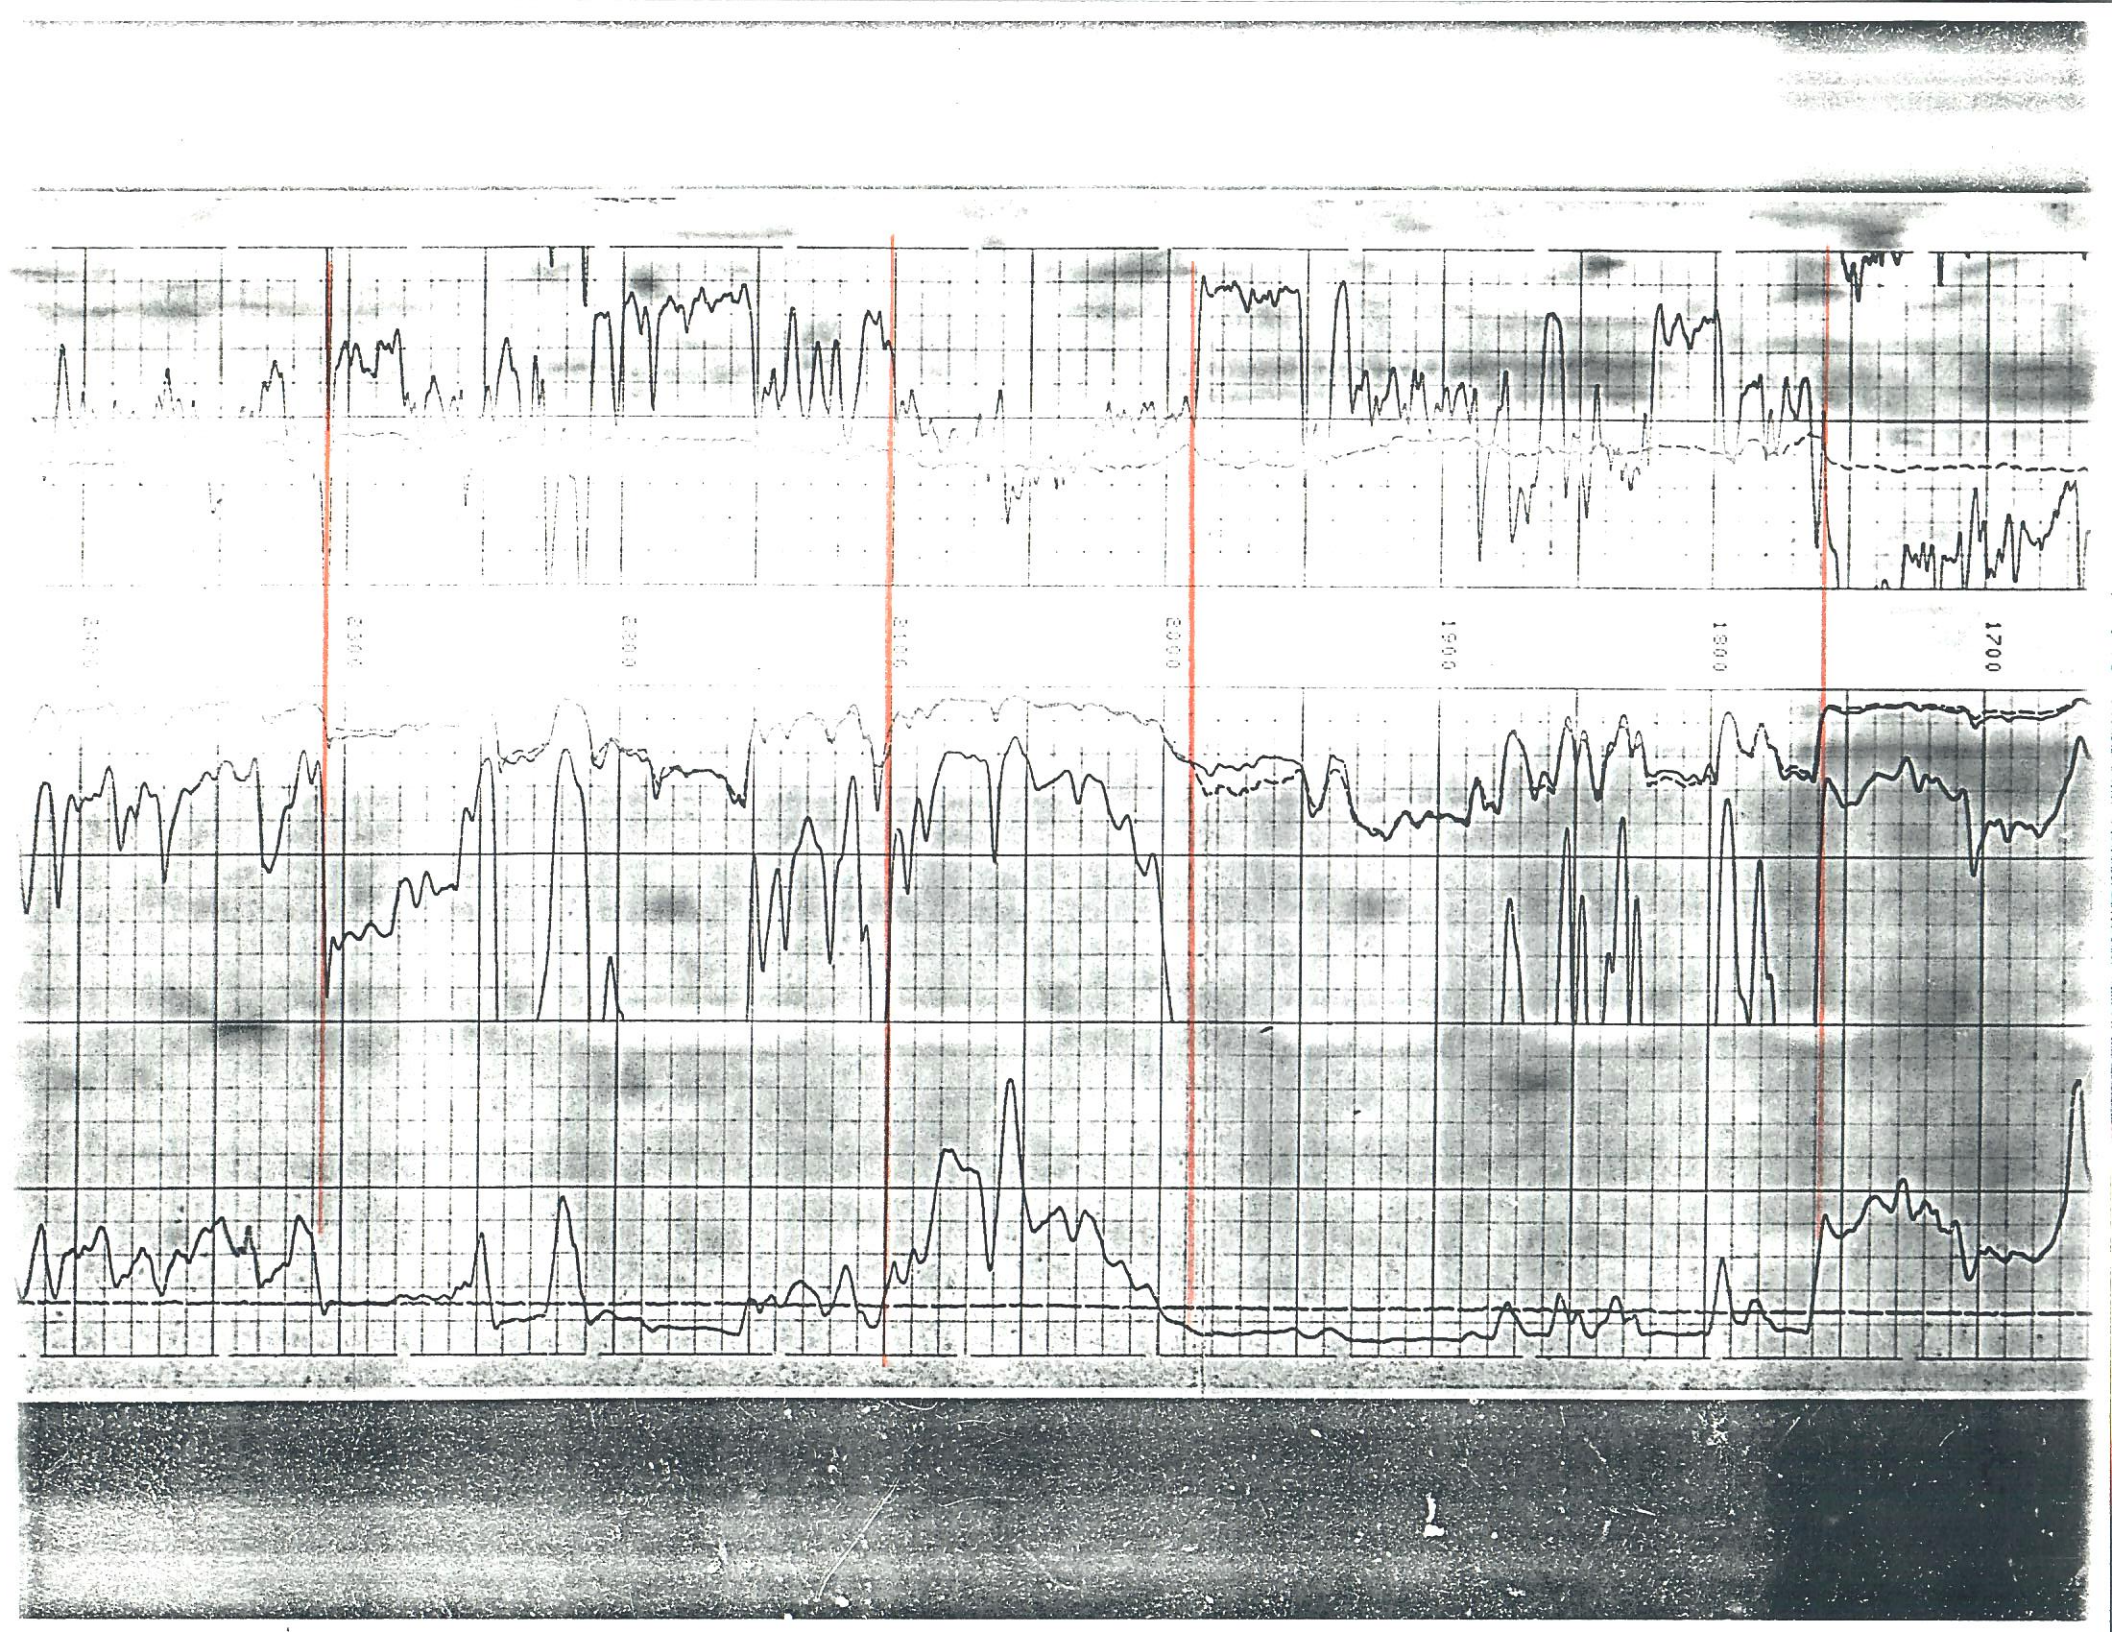
1700