

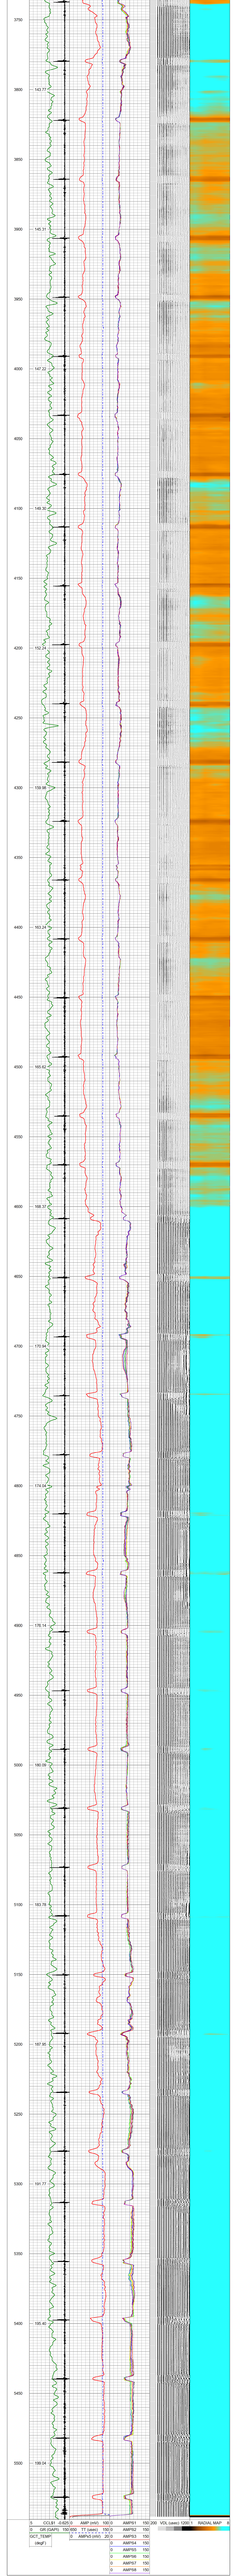

Surefire Wireline West LLC

Radial CBL
VDL / CCL / GR

Company	Civitas Resources
Well	State Peterson 42-20
Field	Wattenberg
County	Weld
State	CO

Company Civitas Resources
Well State Peterson 42-20
Field Wattenberg
County Weld State CO

Location: API #: 05-123-21718
SE NE
LAT: 40.386392 LONG: -104.452639
SEC 20 TWP 5N RGE 63W

Other Services

Permanent Datum	GL	Elevation	4624'
Log Measured From	KB		
Drilling Measured From	KB		

Elevation
K.B. 4640'
D.F. 4639'
G.L. 4624'

Date	July 1, 2025		
Run Number	1		
Depth Driller	7420'		
Depth Logger	6000'		
Bottom Logged Interval	6000'-0'		
Top Log Interval	Surface		
Open Hole Size	12.25"		
Type Fluid	WATER		
Density / Viscosity	8.3		
Max. Recorded Temp.	199° F		
Estimated Cement Top	SEE LOG		
Time Well Ready	ROA		
Time Logger on Bottom	14:15		
Equipment Number	505		
Location			
Recorded By	Hawley		
Witnessed By	Santiago		

Borehole Record				Tubing Record			
Run Number	Bit	From	To	Size	Weight	From	To

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String				
Prot. String				
Production String	4-1/2"	n/a	0'	7417'
Liner				

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for choosing Surefire Wireline

CBL Ran With 500 PSI Applied

Database File	cbl state peterson 42-20.db
Dataset Pathname	pass3
Presentation Format	civitas
Dataset Creation	Tue Jul 01 14:17:35 2025
Charted by	Depth in Feet scaled 1:240

3750
3800
143.77
3850
3900
145.31
3950
4000
147.22
4050
4100
149.30
4150
4200
152.24
4250
4300
159.98
4350
4400
163.24
4450
4500
165.62
4550
4600
168.37
4650
4700
170.94
4750
4800
174.04
4850
4900
176.14
4950
5000
180.09
5050
5100
183.78
5150
5200
187.95
5250
5300
191.77
5350
5400
195.40
5450
5500
199.04
5 CCL$1 -0.625
0 GR (GAPI) 150
GCT_TEMP (degF)
0 AMP (mV) 100
650 TT (usec) 150
0 AMPx5 (mV) 20
0 AMPS1 150
0 AMPS2 150
0 AMPS3 150
0 AMPS4 150
0 AMPS5 150
0 AMPS6 150
0 AMPS7 150
0 AMPS8 150
200 VDL (usec) 1200
1 RADIAL MAP 8