


Final As-Plugged Wellbore Schematic

Well Name: Graham 1
 Location: 1988' FSL, 2020' FWL, NESW Sec 13, T7N, R60W
 County: Weld
 API #: 05-123-05365
 Co-ordinates: 40.573356 / -104.043390
 Elevations: GROUND: --
 KB: 4873'
 Depths (KB): PBTD: --
 TD: 6950'

Date Prepared: 6/26/2025
 Last Updated: 10/6/2025
 Spud Date: 1/8/1956
 Completion Start Date: 1/22/1956
 Last Workover Date: 9/2/2025
 Prepared by: Jake Van Bramer
 Updated by: --

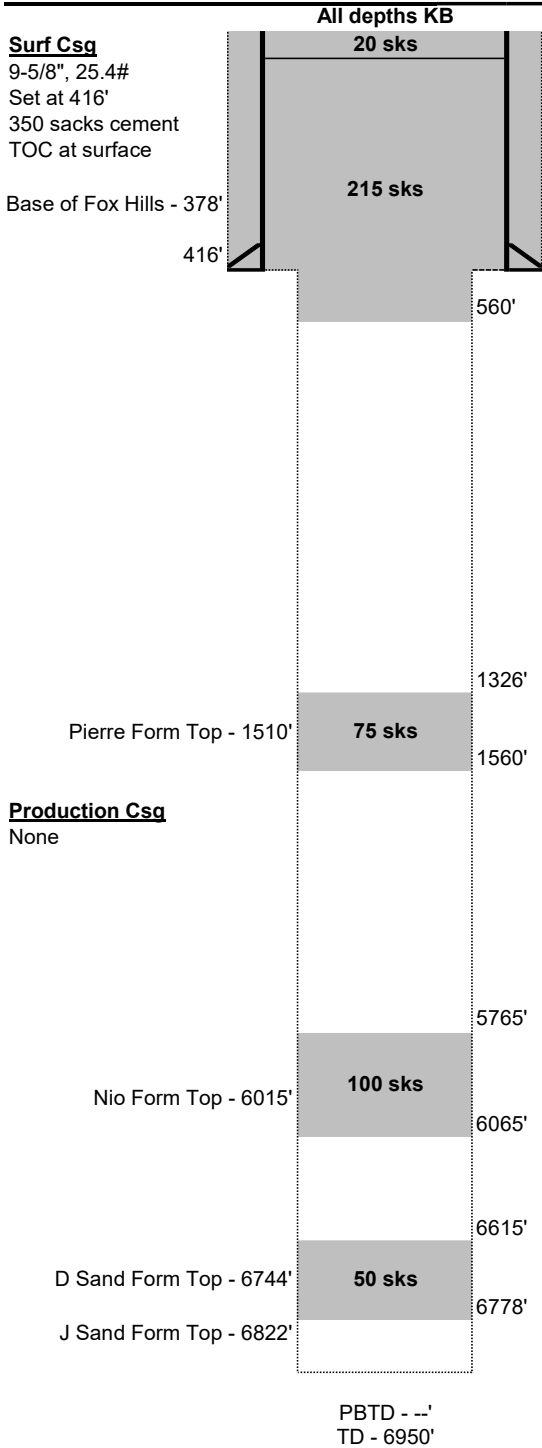

Hole Size
 12.25"
 0'-416'

7.875"
 416'-6950'

Surface Casing:
 Drilled surface hole of unknown size (assumed to be 12-1/4") to 416'
 Set 9-5/8", 25.4# casing at 416'
 Cemented with 350 sks
 TOC at surface

Production Casing:
 None

Open Hole:
 Assumed 7-7/8" Open Hole from 416'-6,950', expected to be washed out

Rods & Tubing:
 None

Perforations:
 None

P&A Plugs:
 1. 50 sks from 6,615'-6,778' (existing)
 2. 100 sks Class G (1.15 cuft/sk) from 5,765'-6,065' (new)
 3. 75 sks Class G (1.15 cuft/sk) from 1,326'-1,560' (new, tagged)
 4. 215 sks Class G (1.15 cuft/sk) from 560' to surface (new)
 5. 20 sks Class G (1.15 cuft/sk) topped off at surface (new)

Additional Notes:

Initial Potential Test:
 None

Formation Tops:

Base of the Fox Hills	378'
Pierre	1510'
Niobrara	6015'
D Sand	6744'
J Sand	6822'