


Final As-Plugged Wellbore Schematic

Well Name: John 1
 Location: 610' FNL, 610' FWL, NWNW Sec 25, T7N, R60W
 County: Weld
 API #: 05-123-12912
 Co-ordinates: 40.551706 / -104.048780
 Elevations: GROUND: 4885'
 KB: 4895'
 Depths (KB): PBTD: --
 TD: 6928'

Date Prepared: 6/30/2025
 Last Updated: 10/7/2025
 Spud Date: 12/21/1985
 Completion Start Date: 12/29/1985
 Last Workover Date: 9/5/2025
 Prepared by: Jake Van Bramer
 Updated by: --

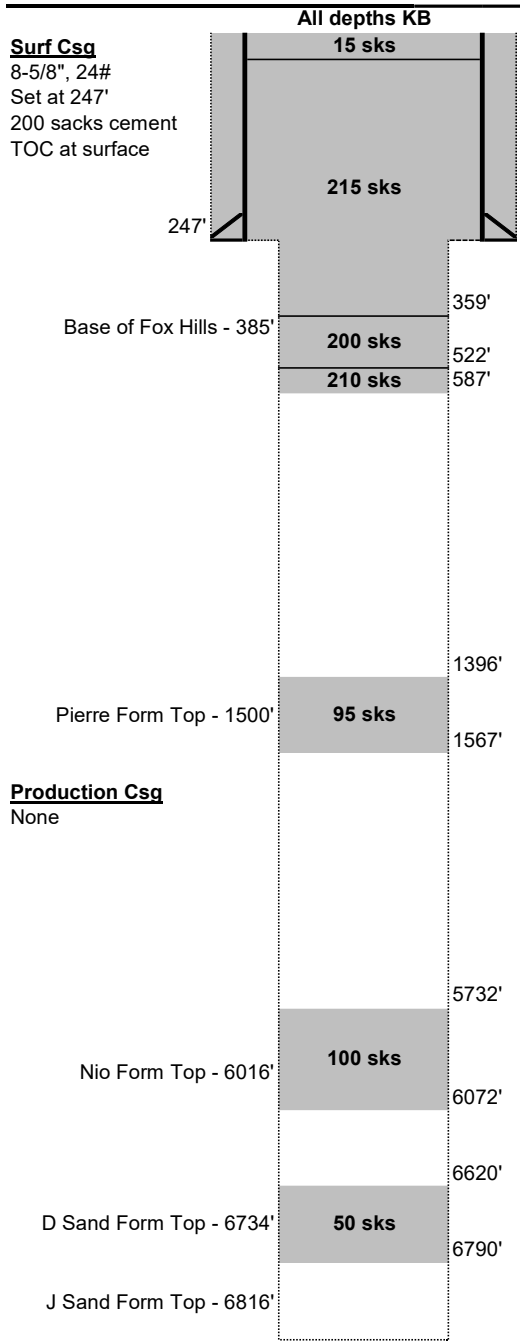

Hole Size
 12.25"
 0'-247'

Surface Casing:
 Drilled 12-1/4" surface hole to 247'
 Set 8-5/8", 24# casing at 247'
 Cemented with 200 sks
 TOC at surface

Production Casing:
 None

Open Hole:
 7-7/8" Open Hole from 247'-6,928', expected to be washed out

Rods & Tubing:
 None

Perforations:
 None

- P&A Plugs:**
1. 50 sks Class G (1.15 cuft/sk) from 6,620'-6,790' (new)
 2. 100 sks Class G (1.15 cuft/sk) from 5,732'-6,072' (new)
 3. 95 sks Class G (1.15 cuft/sk) from 1,396'-1,567' (new)
 4. 210 sks Class G (1.15 cuft/sk) from 522'-587' (new, tagged)
 5. 200 sks Class G (1.15 cuft/sk) from 359'-522' (new, tagged)
 6. 215 sks Class G (1.15 cuft/sk) from 359' to surface (new)
 7. 15 sks Class G (1.15 cuft/sk) topped off at surface (new)

7.875"
 247'-6928'

Additional Notes:

Initial Potential Test:
 None

Formation Tops:

Base of the Fox Hills	385'
Pierre	1500'
Niobrara	6016'
D Sand	6734'
J Sand	6816'

Production Csg
 None

PBTD - --'
 TD - 6928'