



00239315


2

OFFICE OF STATE OIL INSPECTOR  
Oil and Gas Conservation  
Department

LOG OF OIL AND GAS WELL

Locate  
Well  
Correctly

Maude Knutson "B" #3

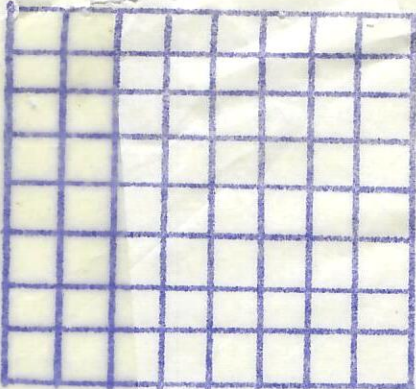

Company British-American Oil Prod. Co. Address P. O. Box 620 - Casper, Wyoming  
State or Patented Patented Field Yenter Block State Colorado  
Well No. 3 Sec. 10 T. 8N. R. 54W. Meridian (E) County Logan  
Location 330 Ft. (S) of N. Line and 330 Ft. (E) of W. line of NE/4 Elevation 4341' GL  
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Date March 4, 1952 Signed [Signature]  
Title District Superintendent

The summary on this page is for the condition of the well as above date.  
Commenced drilling 10-2, 1951 Finished Drilling 11-3 1951

OIL SANDS OR ZONES  
No. 1, from 5098 to 5130 "D" No. 4, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from 5197 to 5212 "J" No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

IMPORTANT WATER SANDS  
No. 1, from \_\_\_\_\_ to \_\_\_\_\_ No. 3, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 4, from \_\_\_\_\_ to \_\_\_\_\_

CASING RECORD

| Size   | Weight per ft. | Threads per inch | Make  | Amount | Kind of Shoe | Cut & Pulled from | Perforated From | to   | Purpose |
|--------|----------------|------------------|-------|--------|--------------|-------------------|-----------------|------|---------|
| 9-5/8" | 25.4           |                  | Armco | 200'   |              |                   |                 |      |         |
| 5 1/2" | 15.5           | 8 Rd.            | J-55  | 5248'  | Baker        |                   | 5207            | 5208 |         |

MIDDING AND CEMENTING RECORD

| Size   | Where Set | No. Sacks of Cement | Methods used | Mud Gravity | Amount of Mud Used |
|--------|-----------|---------------------|--------------|-------------|--------------------|
| 9-5/8" | 214'KB    | 160                 | HOWCO        |             |                    |
| 5 1/2" | 5248'KB   | 250                 | HOWCO        |             |                    |

PLUGS AND ADAPTERS

Heaving plug-Material \_\_\_\_\_ Length \_\_\_\_\_ Depth Set \_\_\_\_\_  
Adapters-Material \_\_\_\_\_ Size \_\_\_\_\_

SHOOTING RECORD

| Size | Shell Used | Explosive Used | Quantity | Date | Depth Shot | Depth Cleaned Out |
|------|------------|----------------|----------|------|------------|-------------------|
|      |            |                |          |      |            |                   |

TOOLS USED

Rotary Tools used from 0 ft. to 5249 ft. and from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
Cable tools were used from 5180 ft. to 5232 ft. and from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

DATES

Put to producing 11-9 1951

The production for the first 24 hours was 95 barrels of fluid of which  
56 % was oil, 44 % ~~water~~ sediment. Gravity Be, 38 Est.  
If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft.  
of gas \_\_\_\_\_ Rock Pressure, lbs. per sq. in. \_\_\_\_\_

EMPLOYES

Herndon Drilling Company Driller \_\_\_\_\_, Driller \_\_\_\_\_  
Driller \_\_\_\_\_, Driller \_\_\_\_\_

FORMATION RECORD

| From | To   | Total Feet | Formation      |
|------|------|------------|----------------|
| 0    | 221  | 221        | Surface        |
| 221  | 5152 | 4931       | Shale & Shells |
| 5152 | 5249 | 97         | Sand & Shale   |