




COLORADO OIL AND GAS CONSERVATION COMMISSION  
SUNDRY NOTICES AND REPORTS OF WELLS

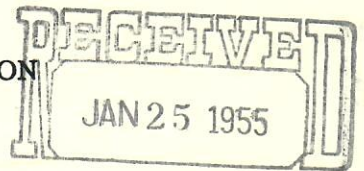

(Indicate nature of data by checking below)

- Notice of intention to drill (attach plat)  XXX
- Notice of intention to change plans \_\_\_\_\_
- Notice of date for test of water shut-off \_\_\_\_\_
- Report on result of test of water shut-off \_\_\_\_\_
- Notice of intention to re-drill or repair well \_\_\_\_\_
- Notice of intention to clean out well \_\_\_\_\_
- Statement of shooting \_\_\_\_\_
- Statement of perforating \_\_\_\_\_
- Notice to pull or otherwise alter casing \_\_\_\_\_
- Notice of intention to abandon well \_\_\_\_\_
- Report of work done on well since previous report \_\_\_\_\_

OIL & GAS  
CONSERVATION COMMISSION

Locate Well Correctly

	13	+	

Notice to do work  Land: Fee and Patented   
 Report of work done  State  Lease No. \_\_\_\_\_

Colorado State Logan County N. W. Graylin Field

"H" #3 (Well No.) Monroe (Lease) NE-NW-SE/4 (1/4 Sec.) 13 (Sec.) 8N (Twp.) 54W (Range) \_\_\_\_\_ (Meridian)

The Well is located \_\_\_\_\_ Ft. ~~(N)~~ of Section Line and \_\_\_\_\_ Ft. ~~(E)~~ of \_\_\_\_\_ Section Line ~~(S)~~ NE NW SE, Sec. 13 ~~(W)~~

The elevation above sea level is 4220 Ft. KB. Est.

Details of Plan of Work: (State names of and expected depths to objective sands. Show sizes, weights, and length of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work.) To drill & test subject well to the "J" Sand of the Graneros Series. Surface Casing: 9-5/8" Armco to be set at approx. 210' KB & cemented with 160 sax & circulated to surface. WOC 24 hrs. Production Casing: 5 1/2" OF 15.5#, J-55 casing to be set thru the oil producing zone of the "J" Sand. Use centralizers & rotating type scratchers thru the "D" & "J" Sands & cement with 150 sax with 3% gel. WOC 72 hrs. Coring: None planned. Testing: DST if content of sands based on electric log is questionable. Logging: Electric log from TD to surface casing. Detail from TD to approx. 100' above the Niobrara. Microlog & Laterolog from TD to 25' above the "D" Sand. Run Gamma Ray Log in conjunction with perforating. Drilling Time: Use Geolograph from 210' to TD. Drift Surveys: At 50' intervals to 300'; thereafter at 250' intervals. Depth Measurements: SLM of drill pipe at approx. 150' above the Greenhorn, prior to DST & at TD. Samples: Collect 10' samples from 50' above expected top of Niobrara to 50' above expected top of "D" Sand; thereafter collect 5' samples to TD. Completion Program: Whenever practicable, completion will be with rotary.

Approved: JAN 23 1955  
[Signature]  
 Director

Date January 24, 1955  
 Company BRITISH-AMERICAN OIL PRODUCING CO.  
 Address P. O. Box 180, Denver 1, Colo.  
 By [Signature]  
 Title District Engineer

AJJ	
DVR	
FJK	
OPS	
HHM	
AM	
JJD	
FILE	

Submit reports of proposed work, for approval, on this form in Duplicate for patented lands and in Triplicate for school and state lands.