


Current Wellbore Schematic

Well Name: State 1
 Location: 660' FSL, 660' FWL, SWSW Sec 16, T11N, R61W
 County: Weld
 API #: 05-123-07866
 Co-ordinates: 40.915661 / -104.218139
 Elevations: GROUND: 5335'
 KB: 5345'
 Depths (KB): PBTD: 7878'
 TD: 7900'

Date Prepared: 2/25/2026
 Last Updated: 2/25/2026
 Spud Date: 9/20/1973
 Completion Date: 1/13/1974
 Last Workover Date: 11/8/1974

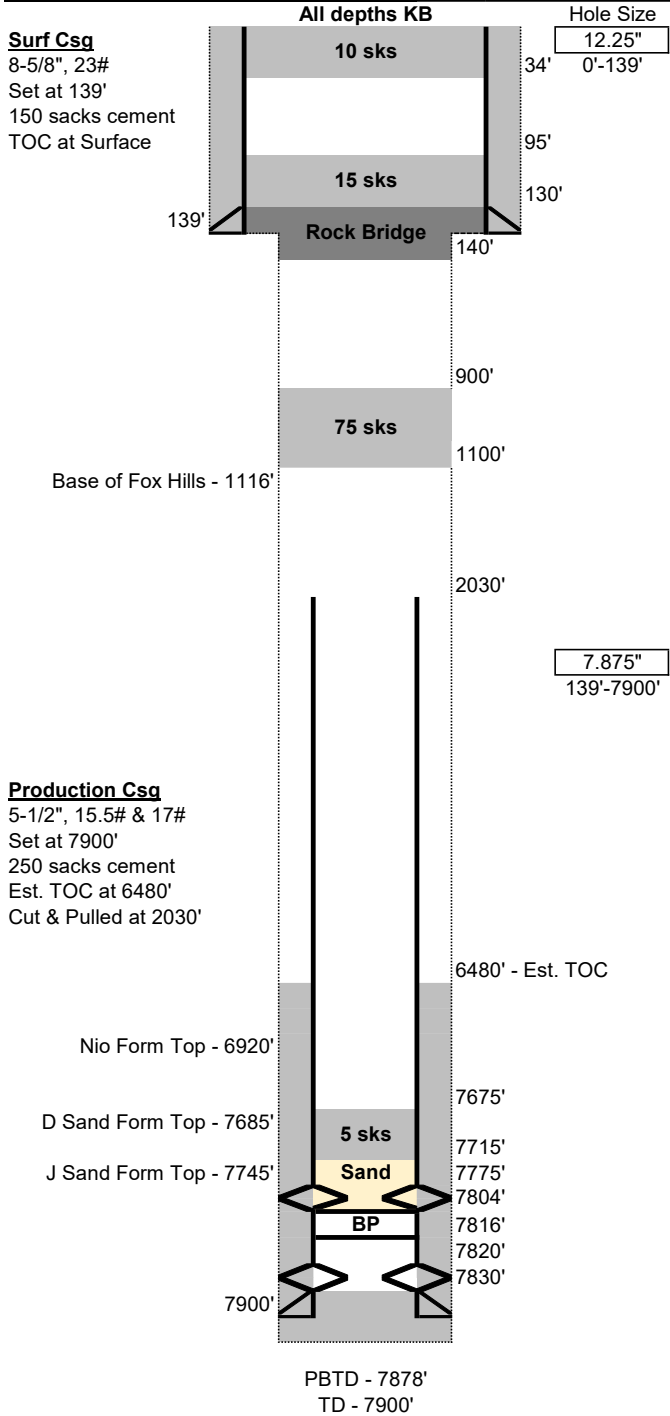

Surface Casing:	
12-1/4" surface hole drilled to 139'	
Set 8-5/8", 23# casing at 139'	
Cemented with 150 sacks	
TOC at Surface	
Production Casing:	
7-7/8" production hole drilled to 7,900'	
Set 5-1/2", 15.5# & 17# casing at 7,900'	
Cemented with 250 sacks	
Est. TOC at 6,480' (calculated)	
Cut & pulled at 2,030' during original abandonment	
Open Hole:	
7-7/8" Open Hole from 139'-2,030'	
Tubing:	
None	
Rods:	
None	
Perforations:	
39 Holes (3SPF) from and 7,775'-7,782' & 7,798'-7,804'	
40 Holes (4SPF) from and 7,820'-7,830'	
P&A Plugs:	
1. 10 sks from 34' to surface	
2. 15 sks from 95'-130'	
3. 25 sks from 900'-1,100'	
4. 5 sks from 7,675'-7,715'	
Additional Notes:	
Frac'd w/ 8,000 gal Pad SE, 36,000 gal SE w/ 24,000# 100 mesh, 51,000# 20/40 sand, 1,00 20/40 GB @ 20 BPM @ 3,900 psi, ISIP 2,650	
BP set at 7,816' during completions	
Perfs plugged with sand from 7,715'-7,804'	
Rock Bridge set at 140' during original abandonment	
Initial Potential Test:	
(1/17/1974) 24 hour test	
80 bbl oil, 117 mcf gas, 80 bbl water	
Csg P: 110, Tbg P: --	
Formation Tops:	
Base of the Fox Hills	1116'
Niobrara	6920'
D Sand	7685'
J Sand	7745'

Proposed Wellbore Schematic

Well Name: State 1
 Location: 660' FSL, 660' FWL, SWSW Sec 16, T11N, R61W
 County: Weld
 API #: 05-123-07866
 Co-ordinates: 40.915661 / -104.218139
 Elevations: GROUND: 5335'
 KB: 5345'
 Depths (KB): PBTD: 7878'
 TD: 7900'

Date Prepared: 2/25/2026
 Last Updated: 4/6/2026
 Spud Date: 9/20/1973
 Completion Start Date: 1/13/1974
 Last Workover Date: 11/8/1974

