MIDWEST WIRELINE

CEMENT BOND LOG WITH GAMMA RAY

Comp.	Desert Eagle Operating
Well	Red Rocks #35-10
Field	
Co.	Las Animas
State	Colorado

Company	Desert Eagle Operating		
Well	Red Rocks #35-10		
Field			
County	Las Animas	State	Colorado
Location:	API # : 05-071-09939-00		Other Services
	SW NE		
	SEC 35 TWP 29S RGE 55W		
Permanent Datum	Ground Level Elevation 5548		Elevation
Log Measured From	GL 0 Above Perm. Datum		K.B.
			D.F.
Drilling Measured From	Ground Level		G.L. 5548

Date of Service	2/19/2026
Run Number	One
Depth Driller or PBTD	1003
Depth Logger	952
Bottom Log Interval	950
Top Log Interval	0
Open Hole Size	12.25
Type Fluid	Water
Fluid Level	Full
Fluid Density	
Max. Recorded Temperature	
Max. Wellhead Pressure	00 PSI
Wellhead Connection	Open
Estimated Cement Top	Surface
Unit Number	P-106
Wireline Size	.288
Location	Hays, KS
Recorded By	M. Hiss
Witnessed By	Brandon Parks

	Size	Wt/Ft	Top	Bottom
Tubing Record				
Surface Casing	9.625	36	00	TD
Production Casing				
Liner Record				

<<< Fold Here >>>

Comments

N/A DENOTES NOT AVAILABLE OR NON-APPLICABLE.
Kim Colorado
West on hwy 160 to Rd 179, North 19 Miles,
East into.

THANK YOU FOR USING MIDWEST WIRELINE LLC!

Your Midwest Wireline Crew	Tool Data - Services	Serial Number
Engineer: M. Hiss		
Operator:		
Operator:		
Operator:		

Sensor	Offset (ft)	Description	Length (ft)	O.D. (in)	Weight (lb)
		Cable Head-Titan_144 1 7/16" Titan Cable Head	1.03	1.44	2.00
		Centralizer-275 Probe 2 3/4" Probe Adjustable Spring Centralizer	2.88	2.75	15.00
WVFS8	11.94	PROBE-RBT-DIGITAL-RBL-D (PR-012) Probe 2 3/4" Radii Bond-Digital	8.75	2.75	100.00
WVFS7	11.94				
WVFS6	11.94				
WVFS5	11.94				
WVFS4	11.94				
WVFS3	11.94				
WVFS2	11.94				
WVFS1	11.94				
WVFCAL	11.94				
WVF3FT	11.94				
WVF5FT	10.94				
HEADVOLT	7.75				
		Centralizer-275 Probe 2 3/4" Probe Adjustable Spring Centralizer	2.88	2.75	15.00
CCL	3.96				
GR	2.66	GR_CCL-2 3/4" Probe (111032)	4.54	2.75	50.00
		Bullnose-PROBE Probe Go Pin Pressure Cap	0.33	1.38	1.00

Dataset: deset_eagle_red_rocks_#35_10_cbl.db: field/well/run1/pass3
Total length: 20.41 ft
Total weight: 183.00 lb
O.D.: 2.75 in

Log Variables

DatabaseC:\ProgramData\Warrior\Data\deset_eagle_red_rocks_#35_10_cbl.db
Dataset field/well/run1/pass4/_vars_

Top - Bottom

BOREID in	BOTTEMP degF	CASEOD in	CASETHCK in	CASEWGHT lb/ft	MAXAMPL mV	MINAMPL mV	MINATTN db/ft
7.875	100	9.625	0.39	36	0	1	0.08

PERFS	PPT usec	SRFTEMP degF	TDEPTH ft
0	0	50	952

Variable Description

BOREID : Borehole I.D.
BOTTEMP : Bottom Hole Temperature
CASEOD : Casing O.D.
CASETHCK : Casing Thickness
CASEWGHT : Casing Weight
MAXAMPL : Maximum Amplitude
MINAMPL : Minimum Amplitude
MINATTN : Minimum Attenuation
PERFS : Perforation Flag
PPT : Predicted Pipe Time
SRFTEMP : Surface Temperature
TDEPTH : Total Depth

MAIN LOG

ZERO PSI APPLIED AT SURFACE

Database File	deset_eagle_red_rocks_#35_10_cbl.db
Dataset Pathname	pass3
Presentation Format	_cbl
Dataset Creation	Thu Feb 19 10:17:56 2026
Charted by	Depth in Feet scaled 1:240

-9 Collar Locator 1 | Line Tension | Amplitude x 5 | 200 Variable Density (usec) 1200
0 Gamma Ray 150 | 0 (lb 2000 | 0 Amplitude (mV) 100
600 3' Travel Time (usec) 175

-9 Collar Locator 1 | Line Tension | Amplitude x 5 | 200 Variable Density (usec) 1200
0 Gamma Ray 150 | 0 (lb 2000 | 0 Amplitude (mV) 100
600 3' Travel Time (usec) 175

REPEAT SECTION

ZERO PSI APPLIED AT SURFACE

Database File	deset_eagle_red_rocks_#35_10_cbl.db
Dataset Pathname	pass2
Presentation Format	_cbl
Dataset Creation	Thu Feb 19 10:10:47 2026
Charted by	Depth in Feet scaled 1:240

-9 Collar Locator 1 | Line Tension | Amplitude x 5 | 200 Variable Density (usec) 1200
0 Gamma Ray 150 | 0 (lb 2000 | 0 Amplitude (mV) 100
600 3' Travel Time (usec) 175

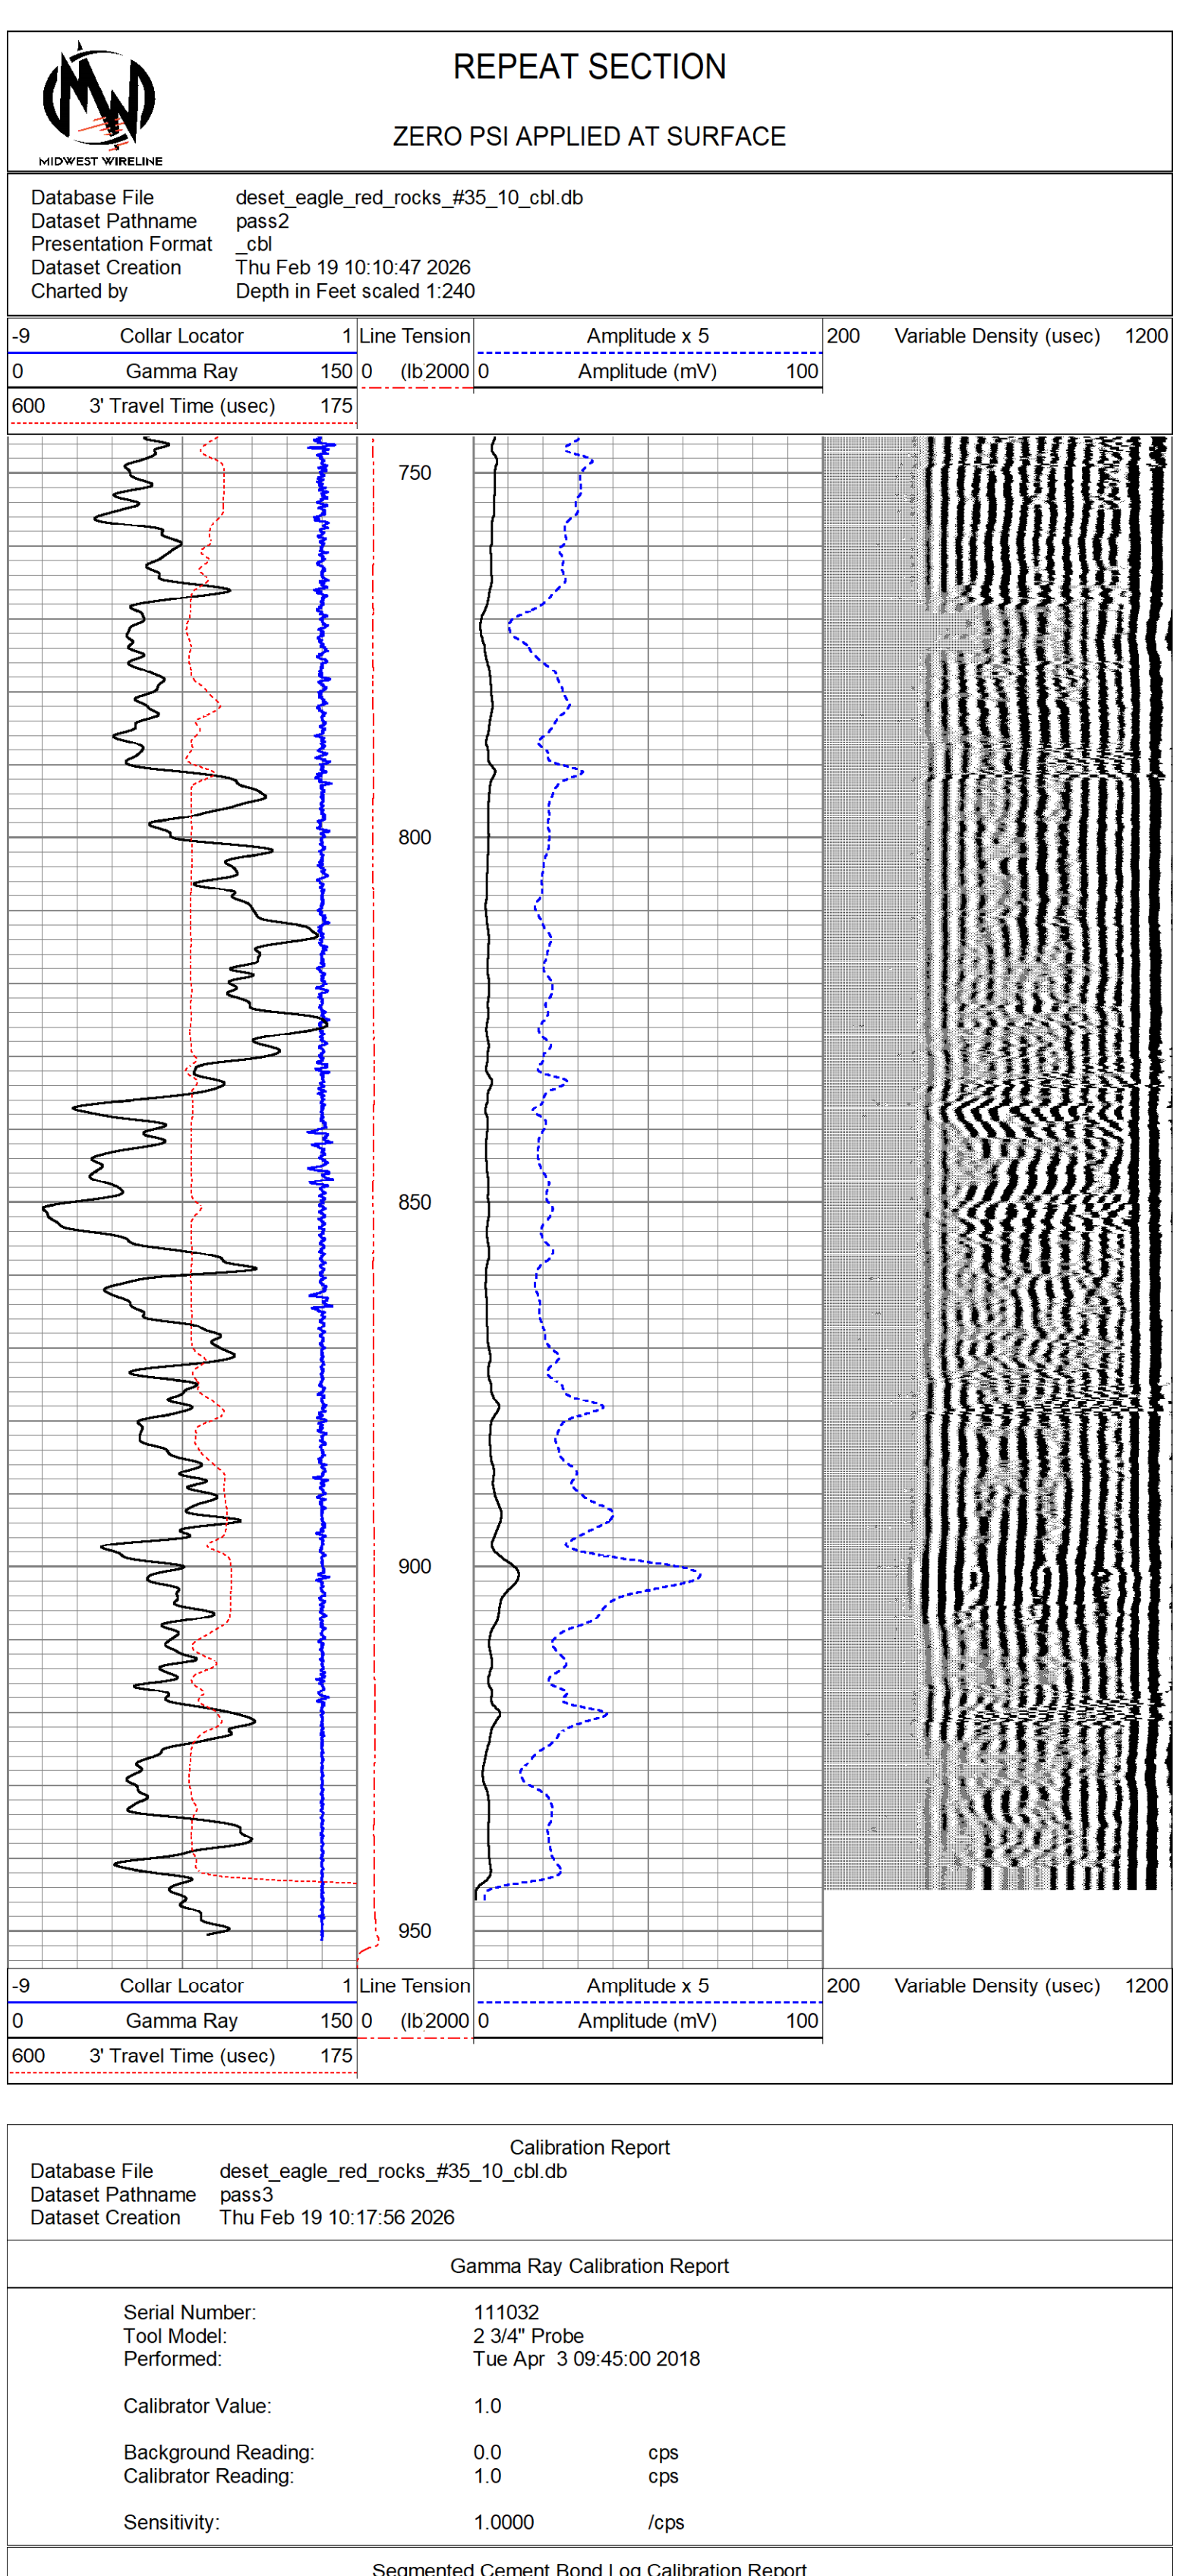

-9 Collar Locator 1 | Line Tension | Amplitude x 5 | 200 Variable Density (usec) 1200
0 Gamma Ray 150 | 0 (lb 2000 | 0 Amplitude (mV) 100
600 3' Travel Time (usec) 175

Calibration Report

Database File	deset_eagle_red_rocks_#35_10_cbl.db
Dataset Pathname	pass3
Dataset Creation	Thu Feb 19 10:17:56 2026

Gamma Ray Calibration Report

Serial Number:	111032	
Tool Model:	2 3/4" Probe	
Performed:	Tue Apr 3 09:45:00 2018	
Calibrator Value:	1.0	
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	1.0000	/cps

Segmented Cement Bond Log Calibration Report

Serial Number:	PR-012	
Tool Model:	RBL-D	
Calibration Casing Diameter:	4.500	in
Calibration Depth:	2950.428	ft

Master Calibration, performed Tue Feb 10 08:49:50 2026:

	Raw (v) Zero	Raw (v) Cal	Calibrated (mv) Zero	Calibrated (mv) Cal	Results Gain	Results Offset
3'	0.003	2.226	0.700	51.300	22.755	0.643
CAL	0.002	1.696				
5'	0.003	1.684	0.700	51.300	30.099	0.620
SUM						
S1	0.008	2.255	0.000	100.000	44.512	-0.373
S2	0.002	2.333	0.000	100.000	42.904	-0.106
S3	0.003	2.329	0.000	100.000	42.990	-0.110
S4	0.003	2.268	0.000	100.000	44.143	-0.119
S5	0.003	2.218	0.000	100.000	45.141	-0.120
S6	0.003	2.175	0.000	100.000	46.030	-0.116
S7	0.002	2.139	0.000	100.000	46.795	-0.116
S8	0.003	2.162	0.000	100.000	46.315	-0.119

Air Zero Calibration, performed Tue Feb 10 08:14:19 2026:

	Raw (v) Zero	Calibrated (v) Zero	Results Offset
3'	0.000	0.000	0.000
5'	0.000	0.000	0.000
SUM			
S1	0.000	0.000	0.000
S2	0.000	0.000	0.000
S3	0.000	0.000	0.000
S4	0.000	0.000	0.000
S5	0.000	0.000	0.000
S6	0.000	0.000	0.000
S7	0.000	0.000	0.000
S8	0.000	0.000	0.000

MIDWEST WIRELINE

Company	Desert Eagle Operating
Well	Red Rocks #35-10
Field	
County	Las Animas
State	Colorado