

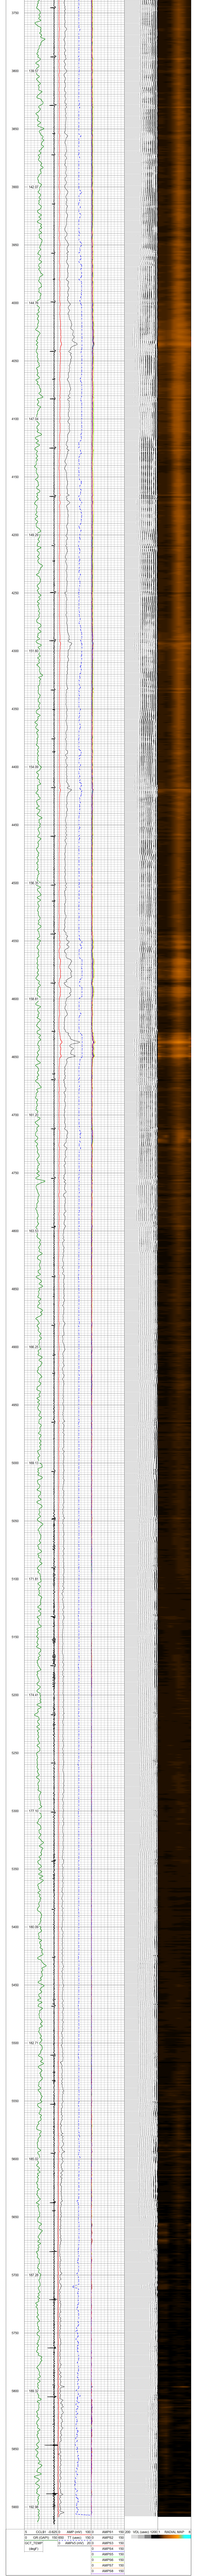

GAMMA RAY CCL
CEMENT BOND
SECTOR VDL

Company	Civitas Resources Inc.
Well	State Seventy Holes P-T-4HNB
Field	Wattenberg
County	Weld
State	CO

Company Civitas Resources Inc.
Well State Seventy Holes P-T-4HNB
Field Wattenberg
County Weld State CO
Location: API #: 05-123-37833
NW NE
LAT: 40.347890 LONG: -104.327130
SEC 4 TWP 4N RGE 62W

Other Services

Permanent Datum Ground Level Elevation 4561'
Log Measured From Kelly Bushing
Drilling Measured From Kelly Bushing

Elevation
K.B. 4573'
D.F. 4572'
G.L. 4561'

Date	April 22, 2026
Run Number	One
Depth Driller	10835'
Depth Logger	5900'
Bottom Logged Interval	5900'
Top Log Interval	Surface
Open Hole Size	13.5"
Type Fluid	H20
Density / Viscosity	~8.3#
Max. Recorded Temp.	192° F
Estimated Cement Top	See Log
Time Well Ready	ROA
Time Logger on Bottom	14:30
Equipment Number	807
Location	Kersey, CO
Recorded By	Tim Hawley
Witnessed By	Travis Fry

Borehole Record

Run Number	Bit	From	To
One			

Tubing Record

Size	Weight	From	To

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String	9-5/8"	36#	0'	476'
Prot. String				
Production String	7"	26#	0'	6724'
Liner	4/5"	11.6#	6427'	10835'

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

!!!!!!!!! Thank You for using Surefire Wireline !!!!!!!!!!
Log ran under 500 PSI @ Surface

Database File	cbl state seventy holes p-t-4hnb.db
Dataset Pathname	pass3
Presentation Format	civitas
Dataset Creation	Wed Apr 22 14:24:39 2026
Charted by	Depth in Feet scaled 1:240

3750
3800
139.57
3850
3900
142.07
3950
4000
144.76
4050
4100
147.04
4150
4200
149.29
4250
4300
151.60
4350
4400
154.09
4450
4500
156.35
4550
4600
158.81
4650
4700
161.20
4750
4800
163.53
4850
4900
166.25
4950
5000
169.13
5050
5100
171.81
5150
5200
174.41
5250
5300
177.10
5350
5400
180.09
5450
5500
182.71
5550
5600
185.02
5650
5700
187.28
5750
5800
189.32
5850
5900
192.98
5 CCL$1 -0.625
0 GR (GAPI) 150
GCT_TEMP (degF)
0 AMP (mV) 100
650 TT (usec) 150
0 AMPx5 (mV) 20
0 AMPS1 150
0 AMPS2 150
0 AMPS3 150
0 AMPS4 150
0 AMPS5 150
0 AMPS6 150
0 AMPS7 150
0 AMPS8 150
200 VDL (usec) 1200
1 RADIAL MAP 8