

**EXPANSION OF THE Tinker GU 02-09 #2 FOR THE #4 WELL
Supplemental STORM WATER MANAGEMENT PLAN (SWMP)**

Appendix MG 5 May 2009

1.0 SITE AND PROJECT INFORMATION

Project Name: Tinker GU 02-09 #4; Well Pad Construction

Project Location: The project is located on private lands located in Sec 9; T34N,
R08W NUL La Plata County, Colorado N.M.P.M.
Lat/Long: 37°13 '58.94400" N 107°44'50.89199" W

Owner Name and Address: BP America Production Company
380 Airport Road
Durango, CO 81301

Facility Contact and
Telephone Number: Dan Fauth
(970) 247-6800

Project Specifics

a. Description of the
Construction Activity: Construction of a well pad for a natural gas well on a 260' x
195' level well pad.

b. Sequence of Major
Construction Activities:

- . Well Pad Construction-Clearing and Grading
- . Well Drilling and Completion
- . Interim Pad and ROW Reclamation

c. Estimated Total Area
of Site disturbance ~1.2 Acres

d_a. Estimated Runoff Coef-
ficient, Before and After

Resource:	Before:	After:
Existing Well Pad	0.75	0.75
Sagebrush	0.35	0.35/0.75

d_b. Existing Soil Data:

Soil:	Area:	Erosion:
Arboles Clay Loam	80% of Pad	Moderate
Zyme Clay Loam	20% of Pad	High

e. Description of Existing
Vegetation and Estimate of
Percent Aerial Cover:

Existing Well Pad <1%
Sagebrush ~50%

f. Description of Potential

- | | |
|---|--|
| Pollution Sources: | 1) Diesel fuel and gasoline for equipment and vehicles; 2) Lubricating oil 3) Drilling mud (bentonite -based viscous fluid); 4) Casing cement. |
| g. Description of Anticipated Non-storm water Discharges: | None Anticipated |
| h. Name of Receiving Water and Type of Outfalls: | Unknown Intermittent Stream via overland flow |

2.0 SITE MAPS

The attached maps (Exhibit C) illustrate the approximate location of the well pad. Construction activities and areas of cut and fill and soil disturbance are limited to the area surveyed for the location. The maps illustrate the features required by the CDPS General Permit for field wide construction activities on fee lands under the field wide permit. There are no point-source outfall structures; runoff enters the receiving watersheds and water bodies by overland flow.

3.0 BEST MANAGEMENT PRACTICES FOR STORMWATER POLLUTION PREVENTION

The Best Management Practices (BMP) to be employed during the construction of this well site and pipeline project are outlined in the field wide Storm Water Management Plan. Specific BMPs to be implemented during the proposed project are described in Exhibit B.

4.0 INSPECTION AND MAINTENANCE

Inspections of the project site and maintenance of BMPs installed shall be conducted in accordance with the CDPHE CDPS permit and the field wide plan.

5.0 TERMINATION

At this time no formal permit termination is necessary as the PHASE II rule under the CDPHE is covered under a field wide permit. Upon final stabilization of the site covered under this supplemental plan, the plan and its associated inspections should be kept for at least three years following the date of final stabilization.

EXHIBIT A
Implementation Responsibility Transfer Log

By signing below, I certify under penalty of law that I understand and am responsible for the maintenance and implementation of the terms and conditions of the general Colorado Discharge Pollutant System (CDPS) permit and measures identified by the above site specific Storm Water Management Plan (SWMP) that may authorize the storm water discharges associated with my activities from the construction site identified in Section 6.0 of this site specific SWMP.

Site Responsibilities:

Name and Title (type or print): _____

Signature: _____

Date: _____

By signing below, I certify under penalty of law that I understand and am responsible for the maintenance and implementation of the terms and conditions of the general Colorado Discharge Pollutant System (CDPS) permit and measures identified by the above site specific Storm Water Management Plan (SWMP) that may authorize the storm water discharges associated with my activities from the construction site identified in Section 6.0 of this site specific SWMP.

Site Responsibilities:

Name and Title (type or print): _____

Signature: _____

Date: _____

By signing below, I certify under penalty of law that I understand and am responsible for the maintenance and implementation of the terms and conditions of the general Colorado Discharge Pollutant System (CDPS) permit and measures identified by the above site specific Storm Water Management Plan (SWMP) that may authorize the storm water discharges associated with my activities from the construction site identified in Section 6.0 of this site specific SWMP.

Site Responsibilities:

Name and Title (type or print): _____

Signature: _____

Date: _____

By signing below, I certify under penalty of law that I understand and am responsible for the maintenance and implementation of the terms and conditions of the general Colorado Discharge Pollutant System (CDPS) permit and measures identified by the above site specific Storm Water Management Plan (SWMP) that may authorize the storm water discharges associated with my activities from the construction site identified in Section 6.0 of this site specific SWMP.

Site Responsibilities:

Name and Title (type or print): _____

Signature: _____

Date: _____

By signing below, I certify under penalty of law that I understand and am responsible for the maintenance and implementation of the terms and conditions of the general Colorado Discharge Pollutant System (CDPS) permit and measures identified by the above site specific Storm Water Management Plan (SWMP) that may authorize the storm water discharges associated with my activities from the construction site identified in Section 6.0 of this site specific SWMP.

Site Responsibilities:

Name and Title (type or print): _____

Signature: _____

Date: _____

By signing below, I certify under penalty of law that I understand and am responsible for the maintenance and implementation of the terms and conditions of the general Colorado Discharge Pollutant System (CDPS) permit and measures identified by the above site specific Storm Water Management Plan (SWMP) that may authorize the storm water discharges associated with my activities from the construction site identified in Section 6.0 of this site specific SWMP.

Site Responsibilities:

Name and Title (type or print): _____

Signature: _____

Date: _____

EXHIBIT B
Detailed BMPs & BMP Alterations Log

BMPs

Identified Implementation Locations:

1. Drilling Pad Construction (See attached Figure 1)

BMPs: 2, 14, 24 & 40

- Implement wattles where shown on maps.
- Install CMP/Pipe, of same diameter, to collar to existing CMP and route under well pad and outlet at natural drainage.
- Implement outlet protection for proposed CMP/Pipe.
- Establish sub-base to route surface water as sheet flow off the south edge of location.
- Establish base lift gravel to accommodate level drilling operations and stabilize pad surface.

2. Access Road ROW Clearing & Grading and Restoration (See attached Figures 1 & 2)

BMPs: 2, 9, 24, 40

- Implement wattles where shown on maps
- Implement non-erosive road base material for the access surface.
- Remove temporary access material upon reclaim of pad, rip or scarify surface to alleviate compaction, and spread top-soil for permanent seeding and mulching (See #5).

3. Drilling and Completion Operations

BMPs: Spill and Contaminated Soil Management

- Fuel, Mud Products, drill cutting spoils, Trailer Septic Tanks, etc. that may contribute to storm water run-off shall be maintained within the graveled well pad area and contained in proper containers and/or sheltered from exposure.
- Any equipment maintenance shall be avoided during drilling and completion—in the event maintenance must occur, it shall be conducted within the graveled pad area, fluids shall be captured within spill proof containers, and absorbent mats shall be utilized beneath maintenance operations.
- Contaminated soil should be collected and disposed of at an appropriate soil farm or similar facility.

4. Interim Pad Reclaim (See attached Figure 2)

BMPs: 2, 24, & 34

- Re-establish drainage swales through north and north-west reclaimed areas.
- Implement wattle check dams and double netted coconut fiber (over seeding See #5) erosion control matting through north-west swale at least 2 feet beyond bank limits—install to manufacturers drainage application specifications.
- Trench and bury remaining drill cuttings when material is 95-100% dry.
- Spread top-soil over fill slopes & blend to existing grade areas where sloping meets pre-disturbance grade.
- Implement slope tracking (surface roughening) on slopes with tracked equipment.
- Repair or replace drilling pad wattles if necessary.


5. Re-seeding & BMP Removal

- Re-seed as soon as possible following reclamation of pad-provided season and weather permits and cover with 2 tons/acre of weed free straw mulch. Tackify or crimp the mulch to the exposed soil surfaces.
 - Cut/Fill Slopes, Temporary access, drainage swales, & Top-Soil Storage Area.


- Seeding shall be broadcast and raked or drilled through the swale areas prior to applying ECB.
- Seed mix should implement an annual cover or triticale.
- Upon 70% Re-Vegetation across site, remove wattles and any other temporary erosion and sediment control BMP.

EXHIBIT C
Maps

STORM WATER CONTROL MAP-DRILL PAD LAYOUT
CLEARING AND GRADING
Figure 1

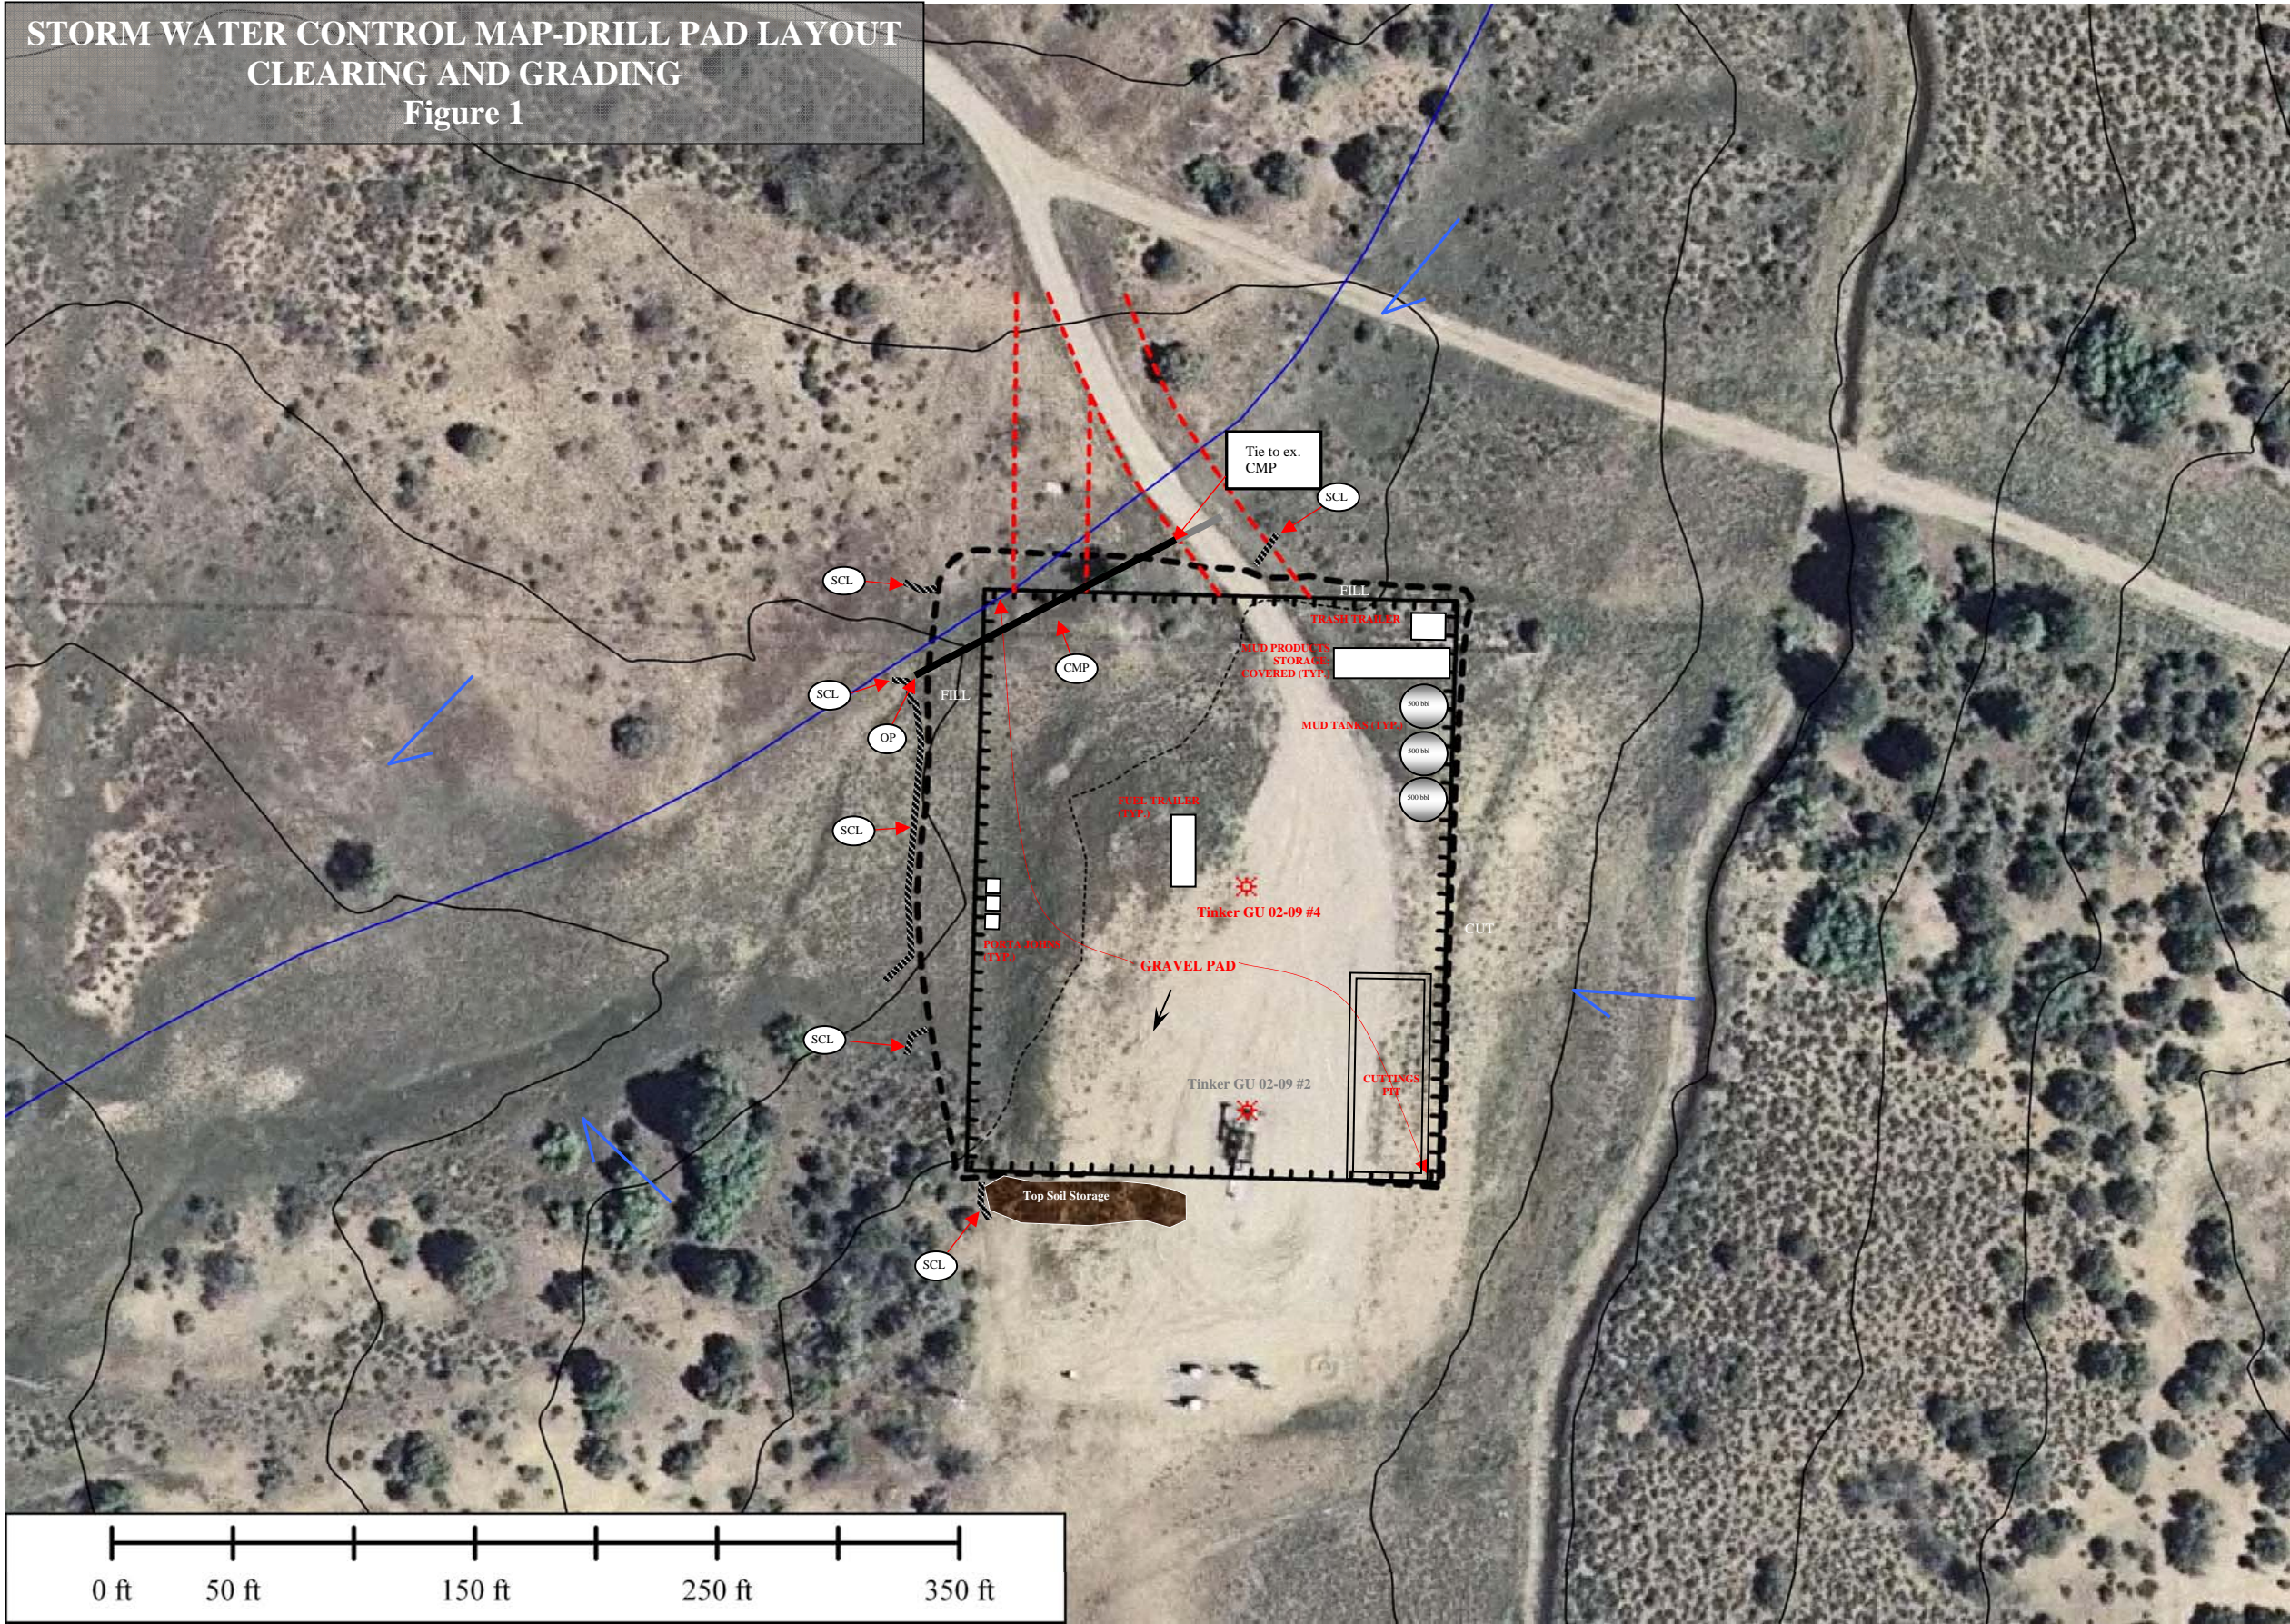


- NOTES:**
1. TOPO LINES: 6-7 ft. PROJECTION: NAD27 (CONUS).
 2. This map is informational in nature, not accurate by surveying standards, and is presented without representations or warranties by Prymorys Environmental Consulting, Inc.



LEGEND	
	Limit of Disturbance
	Sediment Control Log (Wattle)
	Corrugated Metal Pipe Culvert
	Inlet Protection
	Offsite Water Flow Pattern
	Onsite Water Flow Pattern
	Proposed Well Pad Access

5 May 2009

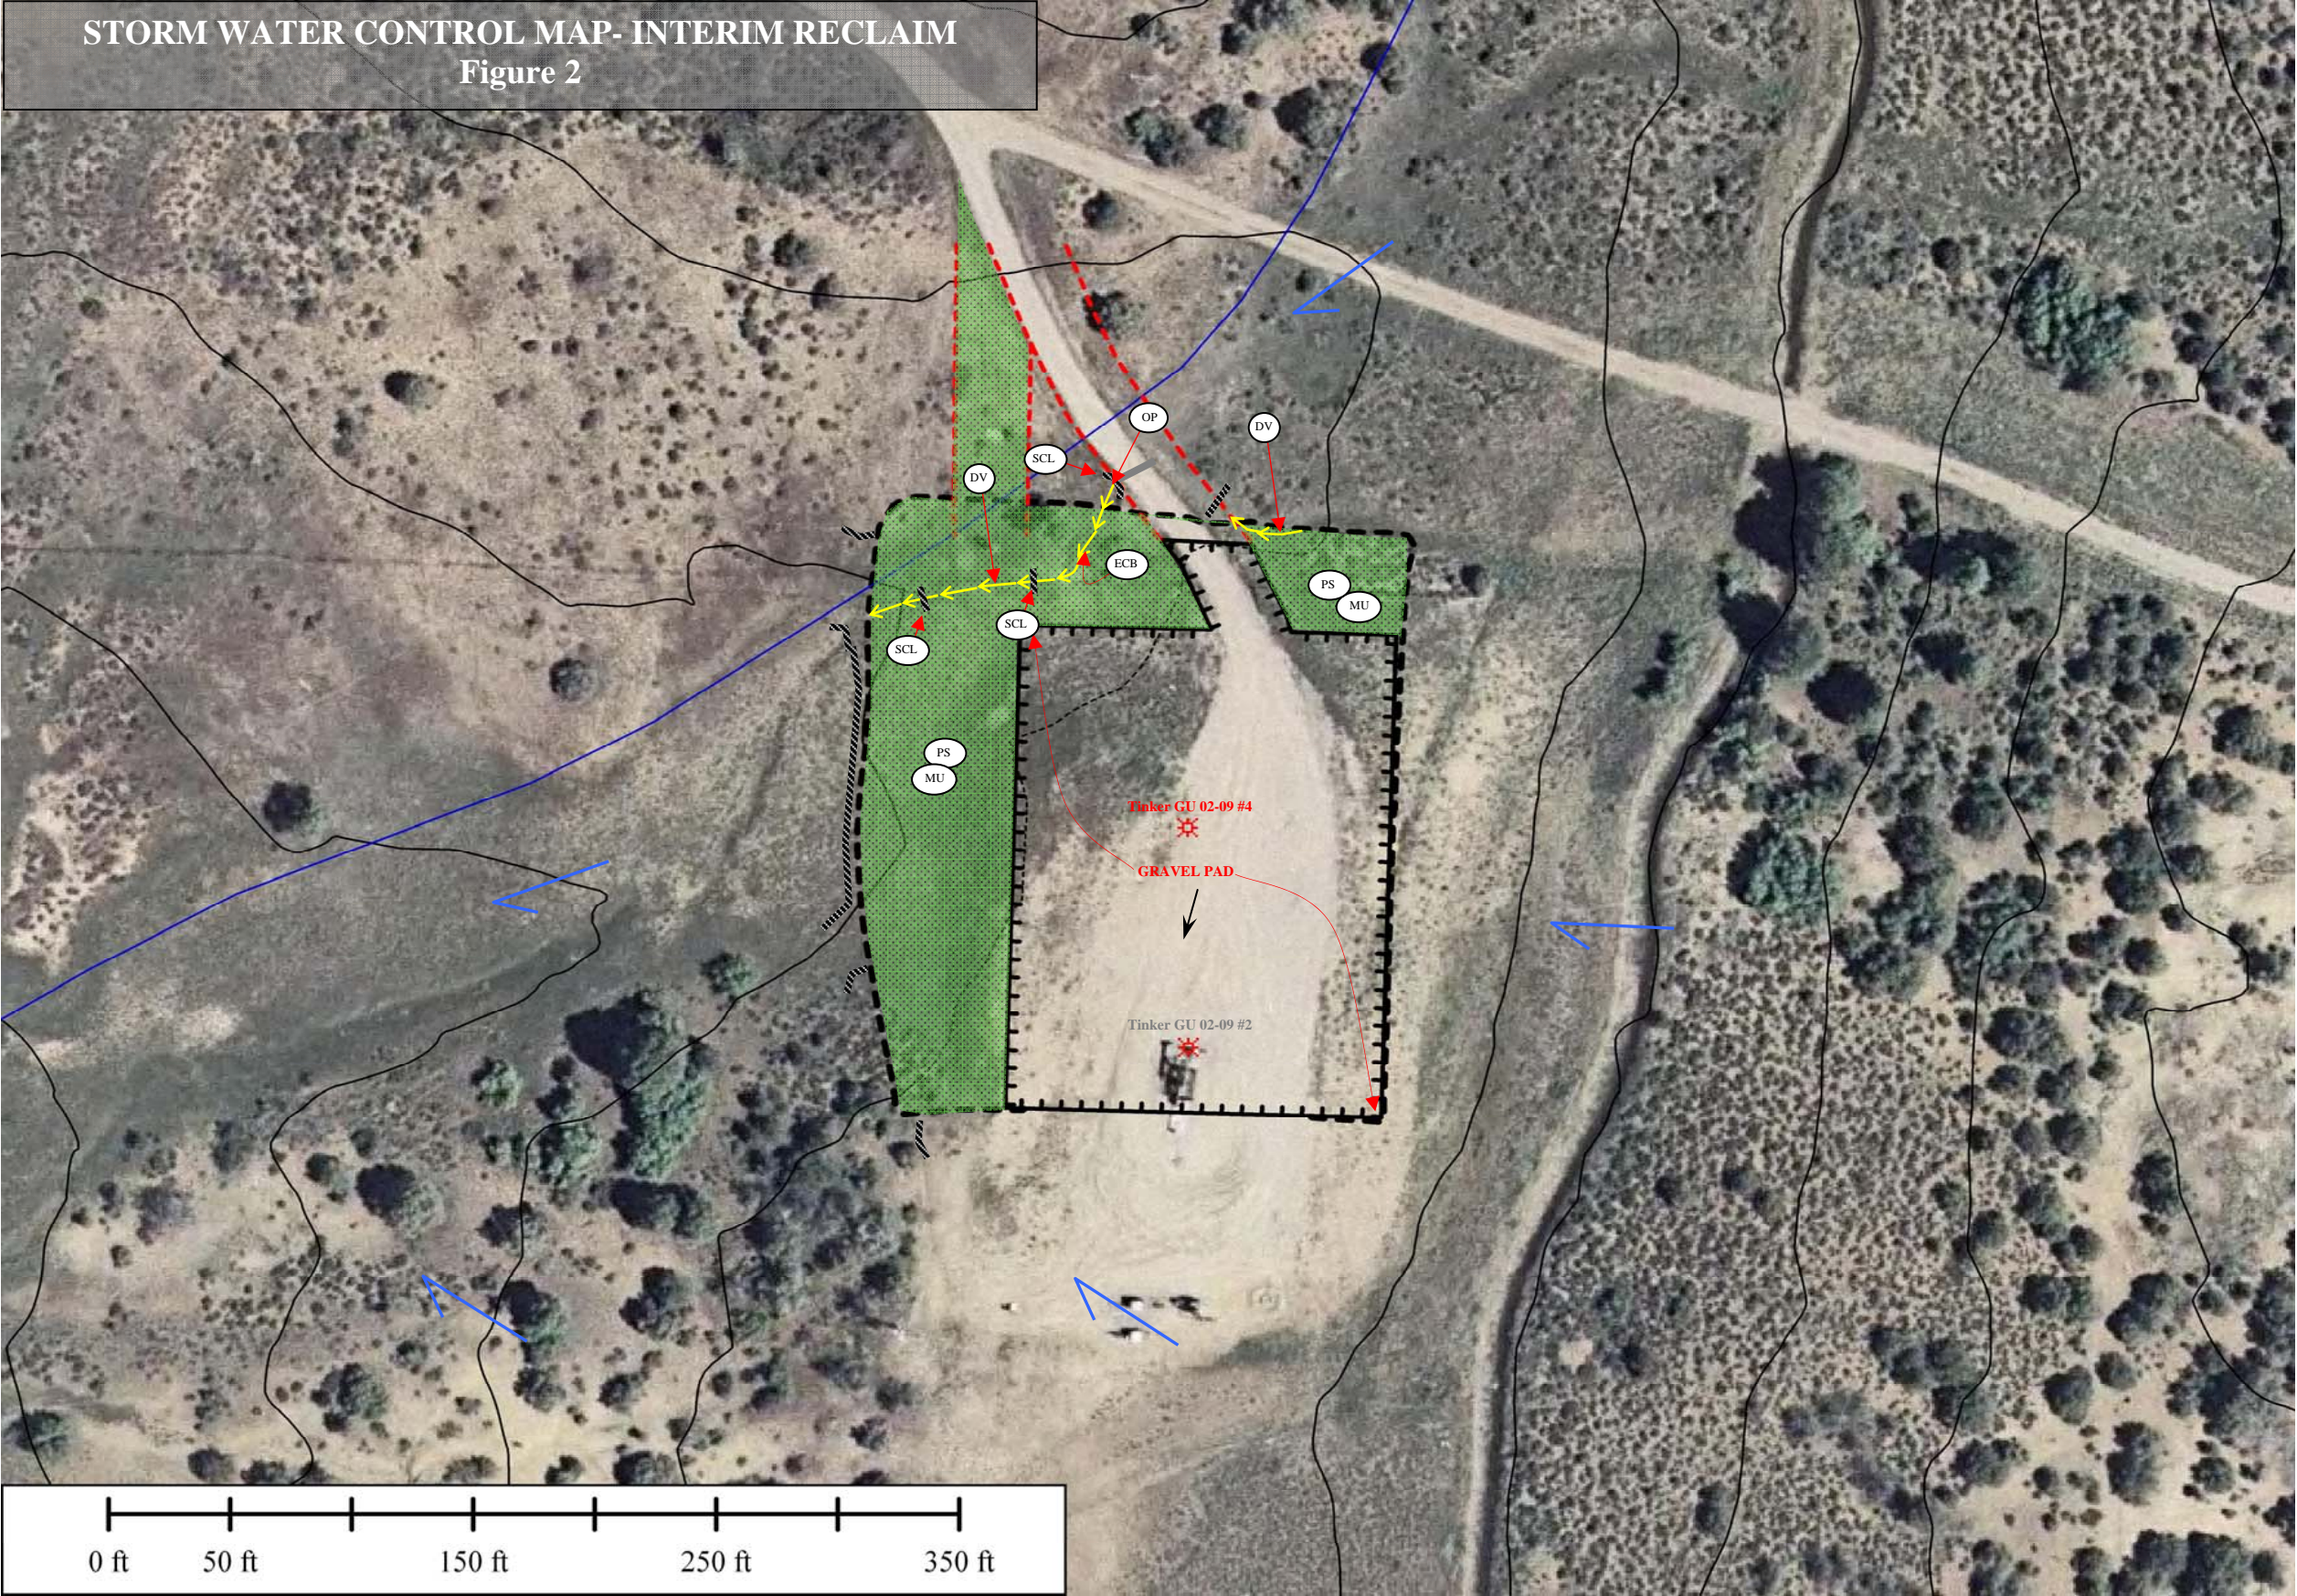

- NOTES:**
- 1. TOPO LINES: 6-7 ft. PROJECTION: NAD27 (CONUS).
 - 2. This map is informational in nature, not accurate by surveying standards, and is presented without representations or warranties by Prymorys Environmental Consulting, Inc.

N

Sec. 9; T 34N, R8W.
N.M.P.M.
(La Plata County, CO.)

LEGEND

	Limit of Disturbance
	Permanent Seeding & Mulching (2 tons/acre of weed free straw mulch)
	Sediment Control Log
	Diversion Ditch
	Outlet Protection (rip-rap)
	Erosion Control Blanket
	Onsite Water Flow Pattern
	Offsite Water Flow Pattern
	Proposed Well Pad Accesses

5 May 2009