

# Well

# KIYOTA 6-8-35


Operator EnCana Oil & Gas (USA) Inc.  
 Location SWSE SECTION 35-T3N-R67W, 6<sup>TH</sup> P.M.  
 County Weld  
 State Colorado  
 Field Wattenberg  
 Footages 627' FSL & 1996' FEL  
 Top of Prod Zone: 1268' FEL & 72' FSL  
 Bottom Hole Loc: 1266' FEL & 68' FSL

Spud Date: 12-29-2006

TD Date: 01-04-2007

## Log Tops

Sussex 4400'  
 Sharon Spgs 7092'  
 Niobrara 7164'  
 Codell 7436'  
 J Sand 7894'

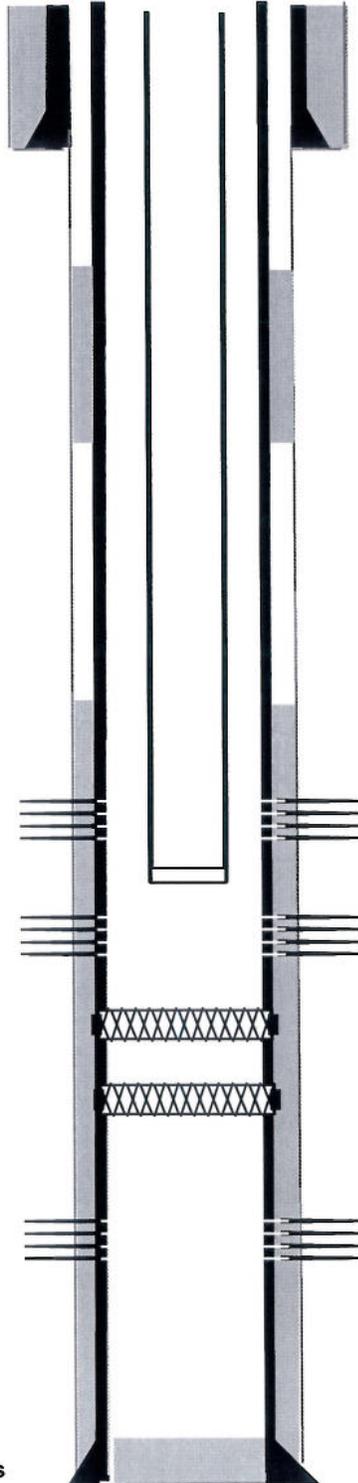

### Surface Casing and Cement

8 5/8" , 24#, landed @ 784', cemented with 330 sxs

### Main Hole

7-7/8" to TD

### Production Casing and Cement

4-1/2" , 11.6#, landed @ 8005', cemented with 425 sxs

### CFP

Set @ 7290' on 1/4/2012  
Drilled out on 1/27/12

### CIBP

Set @ 7490' on 1/4/2012

### CIBP

Set @ 7520 on 1/4/2012

### CFP

Set @ 7310'. 02-21-07  
Drilled out on 07-10-07

### CFP

Set @ 7520'. 01-24-07  
Drilled out on 07-10-07

### Niobrara Refrac

Frac'd 7220-7236 with 136,681 gal frac fluid and 250,640 # sand. (1/4/12)

### Codell Refrac

Frac'd 7436-7456 with 126,916 gal frac fluid and 250,320 # sand. (1/4/12)

Perf'd the Niobrara from 7220' – 7236', 2 spf, 32 holes

Frac'd the Niobrara with 153,732 gal frac fluid and 250,120# sand. 02-22-07

Perf'd Codell from 7436' – 7456' @ 4 spf, 88 holes

Frac'd Codell with 116,360 gal frac fluid and 251,060# sand.

01-25-07

Perf'd J Sand from 7874' – 7924' @ 2 spf

Frac'd J Sand with 174,888 gal frac fluid and 250,720# sand. 01-23-07

### Production Tubing

2-3/8", Set @ 7865'

7975' — PBT

8025' — Driller's TD