

Well

Operator
Location
County
State
Field


ARISTOCRAT ANGUS 12-4C

EnCana Oil & Gas (USA) Inc.
SWNW Section 4-T3N-R65W
Weld
Colorado
Wattenberg

Footages: 1986' FNL & 799' FWL
Spud Date: 12-05-1992
TD Date: 03-15-1993

Log Tops

Sussex	4394'
Niobrara	6910'
Codell	7192'

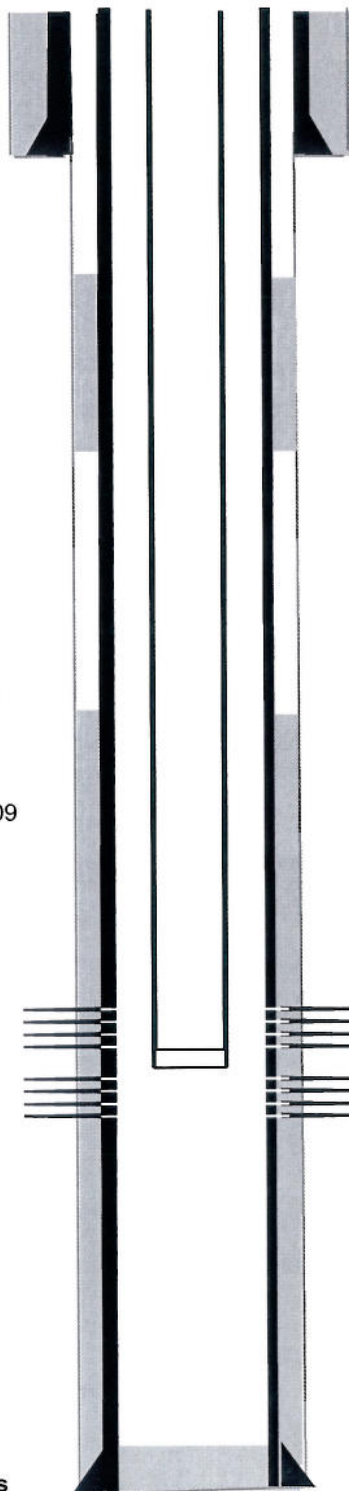

Surface Casing and Cement

8 5/8", 24#, landed @ 630', cemented with 280 sxs

Main Hole

7-7/8" to TD

Production Casing and Cement

4-1/2", 11.6#, landed @ 7296', cemented with 542 sxs

CIBP

Set @ 7050 on 3/13/12
Drilled out 3/31/12

CFP

Set @ 7040' on 2/24/12
Fell past CD 3/5/12

RBP

Set @ 7150' on 05-14-09
Released on 06-17-09

Niobrara

Perf'd 6930-6960, 7090-7120, 2 spf, 120 holes
Frac'd w/ 139,700 gal frac fluid and 189,444 # sand
(1/7/04)

Re-frac'd the Niobrara from 6912' – 6916', 6930' – 6960',
6983' – 6987', 7090'-7120' with 195,426 gal 26# to 20#
Vistar cross linked gel Hybrid containing 351,100# 30/50
sand. (05-17-09)

Re-frac'd 6912-7120 w/3087 bbls frac fluid and 252,080 #
sand (3/16/12)

Codell

Re-Perf'd the Codell from 7188' – 7208' @ 2 spf, 40 holes
Re-Frac'd the Codell with 250,860# 20/40 sd and 129,600
gal frac fluid (4/7/01)

Refrac'd 7193-7208 w/2682 bbls frac fluid and 250,560 #
sand (2/18/12)

Original Completion

Perf'd 6912-6916, 6983-6987, 6 holes, 7192-7208, 8 holes
Frac'd w/ 400,000 # sand and 100,632 gal frac fluid
(4/23/1993)

Production Tubing

2-3/8", Set @ 7179'
3/31/12

7300'

— Driller's
TD