


Well IONE 2-8-4
Operator EnCana Oil & Gas (USA) Inc.
Location SESW Section 4-T2N-R66W
County WELD
State Colorado
Field Wattenberg
Footages 590' FSL; 2205' FWL

Spud Date: 05-29-12
TD Date: 06-01-12

Log Tops

Sussex	4692'
Niobrara	7279'
Codell	7554'
J Sand	7956'

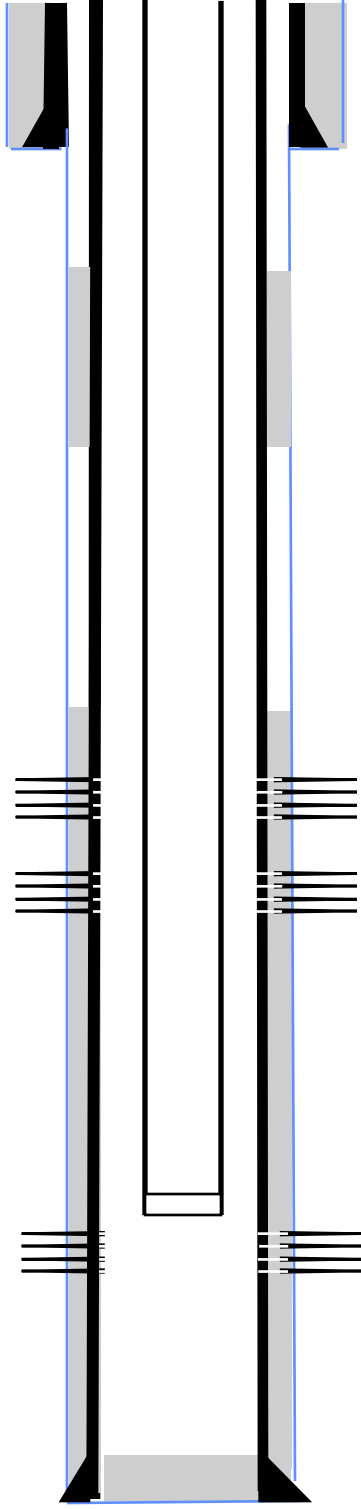

Surface Casing and Cement

8 5/8" , 24#, landed @ 837', cemented with 335 sxs

Main Hole

7-7/8" to TD

Production Casing and Cement

4-1/2" , 11.6#, landed @ 8101', cemented with 690 sxs

CBP

Set @ 7290'. 08-14-12
 Drilled out on 08-15-12

Perf'd the Niobrara from 7327' - 7339' @ 4 spf
 Frac'd the Niobrara 7,327' – 7,339' (48 holes), w/ 102,102 gals 18 # Vistar Hybrid crosslinked gel containing 251,960 # 20/40 sand. 06-26-12

CFP

Set @ 7390'. 06-26-12
 Drilled out on 08-15-12

Perf'd the Codell from 7555' – 7569' @ 4 spf
 Frac'd the Codell 7,555' – 7,569' (42 holes) w/ 92,694 gal 22# Vistar Hybrid cross linked gel containing 251,220 # 30/50 sand. 06-25-12

CFP

Set @ 7630'. 06-26-12
 Drilled out on 08-15-12

Production Tubing
 2-3/8" tubing, set @ 7945'

Perf'd the J Sand from 7957' - 8005' @ 4 spf
 Frac'd the J-Sand 7,957' – 7,962', 7,985'- 8005' (50 holes)w/ 62,916 gal 18 # Vistar Hybrid cross linked gel containing 250,480 # 20/40 Sand. 06-25-12

8115' — Driller's TD