

WELLBORE DIAGRAM

Bayswater E&P LLC

Schneider 20-36

SWSE Sec 36-T7N-R67W

SHL: 243' FSL, 2139' FEL

BHL: 1310' FSL, 1341' FEL

Weld County CO

05-123-35731

Updated

02/25/13

JRR

Directions:

Hwy 85 N to Hwy 392, W to

WCR 27, N to WCR 74,

1.25 mi W, N into

G.L.= 4877

K.B.= 4893


16

8-5/8" 24# set at 608' (12-1/4" hole)

Cmt'd w/ 430 sx to Surf.

TOC: 850'

CBL

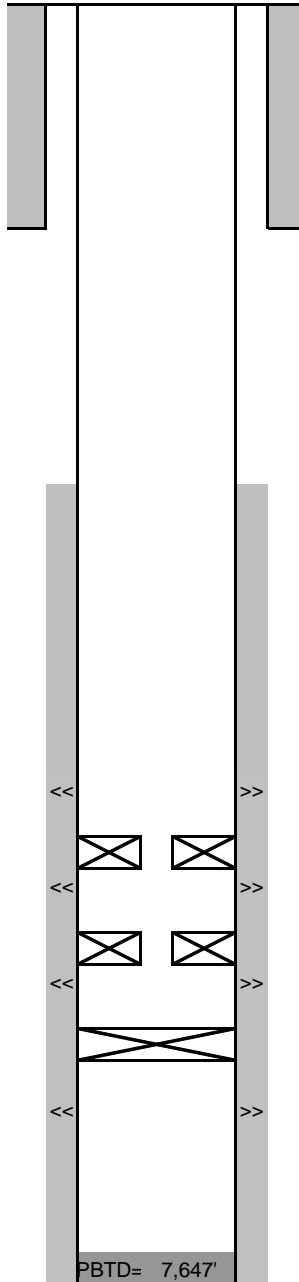

Niobrara A 7196'-7220', 4spf

Frac on 11/26/12, with 187,782 gals Slickwater and 111,900 lbs. 30/50 White CIBP 7,294'

Niobrara B 7314'-7344', 4spf

Frac on 11/26/12, with 282,476 gals Slickwater and 201,320 lbs. 30/50 White CIBP 7,380'

Niobrara C 7405-7414', 7416-7422', 7426-7434' 4spf

Frac on 11/26/12, with 196,316 gals Slickwater and 89,000 lbs. 30/50 White CIBP 7,480'

Codell: 7510'-7527', 4 spf

Frac on 11/2/12, with 268,064 gals Slickwater and 180,240 lbs. 30/50 White

PBTB= 7,647'

TD MD= 7,675'

TD TVD= 7,493'

4-1/2" 11.6# CSG @ 7664' (7-7/8" O.H.)

Cmt'd w/ 330 sx lead, 11 ppg; 580 sx middle, 12.5 ppg; 235 sx tail, 14.6 ppg