

Well

Operator

Location

County

State

Field

Footages

DOWDY 41-10

EnCana Oil & Gas (USA) Inc.

NENE Section 10-T2N-R65W

WELD

Colorado

Wattenberg

1114' FSL; 1112' FEL

Spud Date: 10-24-2012

TD Date: 10-27-2012

Log Tops

Sussex

4384'

Niobrara


6922'

Codell

7203'

J Sand

7657'

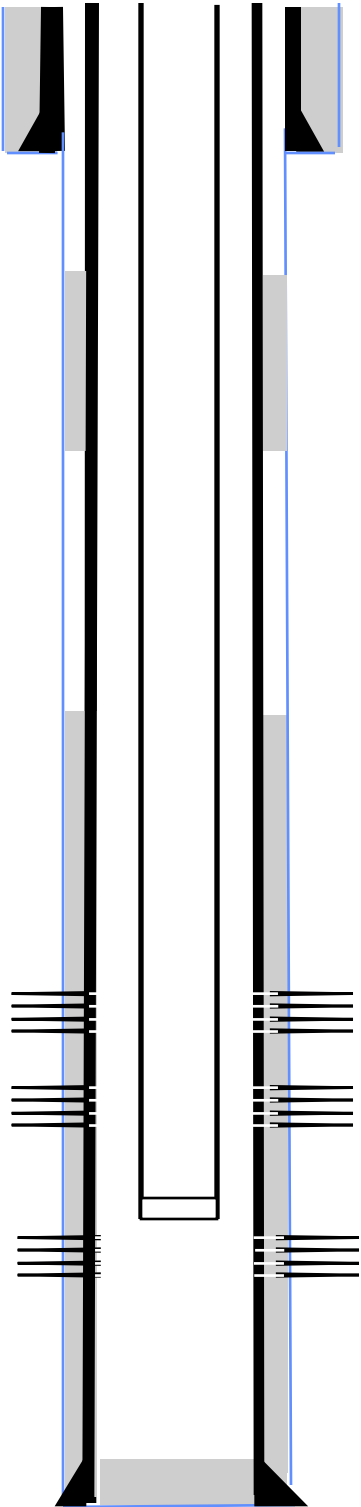

Surface Casing and Cement

8 5/8" , landed @ 920',cemented with 350 sxs

Main Hole

7-7/8" to TD

Production Casing and Cement

4-1/2" , landed @ 7819',cemented with 630 sxs

CBP

Set @ 6900'. 01-08-13

Drilled out on 01-09-13

Perf'd the Niobrara from 6972' – 6984' @ 4 jspf

Frac'd the Niobrara with 250380# 20/40 sand with 90,762 gals SLF. 12-14-12

CFP

Set @ 7050'. 12-14-12

Drilled out on 01-09-13

Perf'd the Codell from 7204' – 7218' @ 3 jspf

Frac'd the Codell with 251,220# sand with 79,170 gals SLF. 12-14-12

CFP

Set @ 7263'. 12-13-12

Drilled out on 01-09-13

Production Tubing

2-3/8" tubing, set @ 7632'

Perf'd the J Sand from 7662' – 7674, 7685' – 7698' @ 2 jspf

Frac'd the J Sand with 251,060# 20/40 sand with 119,574 gals SLF. 12-13-12

7830'

—

Driller's TD