

Well

Operator

Location

County

State

Field

Footages

Dowdy 6-4-10

EnCana Oil & Gas (USA) Inc.

NENE Section 10-T2N-R65W

WELD

Colorado

Wattenberg


1114' FNL & 1122' FEL

Spud Date: 10-28-13

Log Tops

Sussex	4529'
Niobrara	7048'
Codell	7332'
J Sand	7772'

Production Tubing
2-3/8" tubing, set @ 7751'

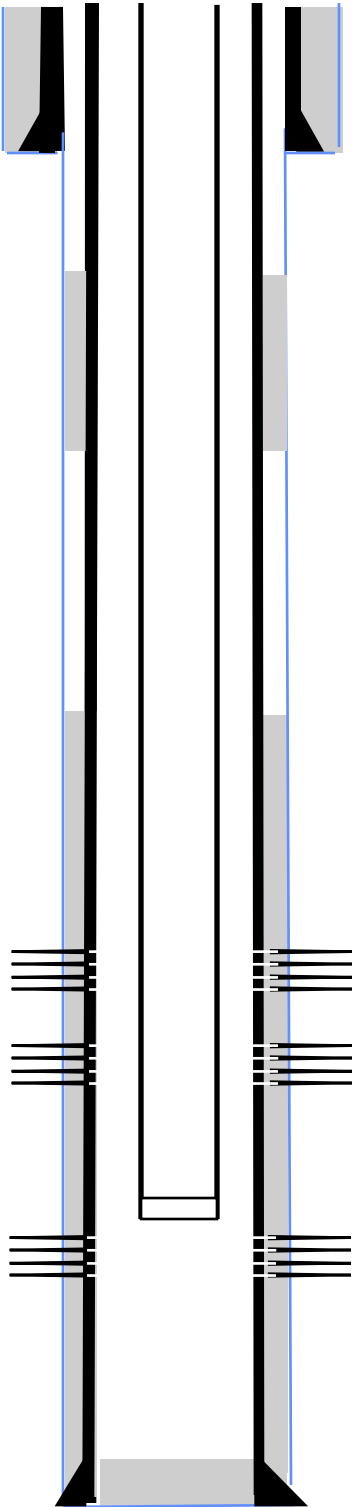

Surface Casing and Cement
8 5/8" , landed @ 920',cemented with 350 sxs

Main Hole
7-7/8" to TD

Production Casing and Cement
4-1/2" , landed @ 7948',cemented with 640 sxs

CBP
Set @ 6976'. 01-10-13
Drilled out on 01-11-13

Perf'd the Niobrara 7102' – 7114' @ 4 spf
Frac'd the Niobrara with 251,160# 20/40 sand with 90,636 gals SLF. 12-12-12

CFP
Set @ 7164'. 12-12-12
Drilled out on 01-11-13

Perf'd the Codell from 7333' – 7347'.@ 3 spf
Frac'd the Codell with 250,100# 20/40 sand with 80,304 gals SLF. 12-12-12

CFP
Set @ 7440'. 12-12-12
Drilled out on 01-11-13

Perf'd the J Sand from 7776' – 7788', 7809' – 7822 @ 2 spf
Frac'd the J Sand with 250,740# 20/40 sand with 117,852 gals SLF. 12-12-12

7958' — Driller's TD