



Kerr-McGee Oil & Gas Onshore LP

Interim Reclamation Plan

**East Street 14-22HZ Well Pad and Facility
SW $\frac{1}{4}$ SE $\frac{1}{4}$, SE $\frac{1}{4}$ SW $\frac{1}{4}$ Sec 22, T3N, R63W**

Weld County, Colorado

March, 2023

TABLE OF CONTENTS

1.0	INTRODUCTION.....	1
2.0	SITE DESCRIPTION.....	1
3.0	PROPOSED SEQUENCE OF MAJOR ACTIVITIES.....	2
3.1	Surface Owner Consultation and Timing.....	2
3.2	Removal of drilling and completions equipment and associated debris and waste.....	2
3.3	Recontouring, compaction relief and topsoil re-distribution.....	2
3.4	Soil Preparation.....	2
3.5	Seeding.....	3
3.6	Mulching.....	3
3.7	Implement Post-Construction Stormwater Control Measures.....	3
3.8	Weed control.....	3
3.9	Interim Reclamation Completion Notice.....	4
4.0	INTERIM RECLAMATION STORMWATER, EROSION & SEDIMENT CONTROL MEASURES / BMPS.....	4
4.1	Structural Control Measures / BMPs.....	4
4.2	Non-Structural Control Measures / BMPs.....	5
5.0	INTERIM STABILIZATION.....	5
5.1	Non-Cropland.....	5
5.2	Cropland.....	5
6.0	INSPECTIONS AND MAINTENANCE.....	6
6.1	Inspections.....	6
6.2	Maintenance.....	6

APPENDICES

APPENDIX A	SOIL PROPERTIES AND MAP
APPENDIX B	SEED MIX
APPENDIX C	INTERIM RECLAMATION GRADING PLAN
APPENDIX D	SUMMARY OF SITE-SPECIFIC EROSION & SEDIMENT CONTROLS / BMPS

1.0 INTRODUCTION

Kerr-McGee Oil & Gas Onshore LP (KMOG) has developed this site-specific Interim Reclamation Plan to establish proper planning and execution for reclamation of the land within areas that are affected by oil and gas location construction and development, but no longer in use by production operations once turned over. When all wells on a pad are completed and turned over to production, the drilling footprint will be reduced, and areas not needed for production will be restored and re-vegetated in accordance with Colorado Oil and Gas Conservation Commission (COGCC) Series 1000 Reclamation Rules and consistent with the requirements of Rule 1003 for Interim Reclamation. Reference shall also be made to Rules 304.c(14) Topsoil Protection Plan and 304.c(15) Stormwater Management Plan within this process.

2.0 SITE DESCRIPTION

Operator:	Kerr-McGee Oil & Gas Onshore LP
COGCC ID:	47120
Project / Site Name:	East Street 14-22HZ Well Pad and Facility
Location:	Sec 22 T3N, R35W, Weld County, Colorado
Elevation:	4791.1'
Land Type:	FEE
Surface Owner:	Cervi Enterprises Inc
Total Area of Project:	CONSTRUCTION PHASE: 16.60 acres WORKING PAD SURFACE AREA: 6.09 acres TOTAL AREA INTERIM RECLAIMED FOR PRODUCTION: 13.41 acres INTERIM RECLAIM / PRODUCTION AREA: 7.51 acres
Description of Existing Vegetation:	Existing vegetation on the subject property is native grasses and forbs interspersed with undesirable vegetation, primary use is grazed rangeland.
Soil Type(s):	69 – Valent Sand, 0 to 3 percent slopes. HSG A
Stream Crossings:	There are no stream crossings associated with the location.
Primary Receiving Water:	Freshwater emergent wetland 0.14 miles southwest of proposed oil and gas location.
General Direction of Flow and Drainage:	Southeast
Reclamation Manager/Contact:	Austin Lee – HSE Advisor Occidental Petroleum Corporation Office: (970) 515-1058
Major Equipment List:	The East Street 14-22HZ location will be a (10) well pad, with (0) tanks, (2) separators, (0) LACTs, (1) air compressors, and (1) meter buildings.

TENTATIVE DEVELOPMENT & OPERATION SCHEDULE

Phase	Work Activity	Estimated Start Date*
CON	Location construction	Oct 2023
SPUD	Surface drilling and well prep operations	May 2024
DRL	Horizontal drilling	June 2024
FRAC	Hydraulic fracturing operations and well completions	June 2025
FAC	Production facility construction	May 2024
INT	Interim reclamation of construction disturbance	Oct 2026

**Based on pending receipt of required permits, and drilling rig availability. Schedule is tentative and subject to change.*

3.0 PROPOSED SEQUENCE OF MAJOR ACTIVITIES

3.1 Surface Owner Consultation and Timing

Surface owner consultation shall be conducted to minimize disruption of agricultural operations and designate final land use. Interim reclamation shall occur approximately no later than 10/31/2026 after conclusion of subsequent operations. If soil conditions are not conducive due to weather conditions, a Form 4 Sundry Notice shall be submitted, and reclamation commenced as soon as conditions allow and as practicable.

3.2 Removal of drilling and completions equipment and associated debris and waste

Debris and non-exploration and production (E&P) waste materials (concrete, sack bentonite and other drilling mud additives, sand, plastic, pipe, and cable) will be removed, and cellars, rat holes, and other boreholes unnecessary for further lease operations will be backfilled. Soil and aggregate mix used to build a compacted surface for construction and drilling purposes will be removed in areas no longer intended for production and interim reclamation and disposed of at an approved facility.

3.3 Recontouring, compaction relief and topsoil re-distribution

All segregated soil horizons removed for construction will be replaced to their original relative positions and contour and will be tilled adequately to alleviate compaction and re-establish a proper seedbed. Operator will be responsible for segregating topsoil, backfilling, re-compacting any backfill, reseeding, and re-contouring the surface on all disturbed areas of an oil and gas location, including that which is not being used for production or processing of E&P materials so as not to interfere with Surface Owner(s) operations.

3.4 Soil Preparation

Soil preparation for interim reclamation generally includes the following practices:

3.4.1 Compaction Alleviation

After topsoil re-distribution, the interim reclamation area shall be cross ripped to a depth of eighteen inches with an agricultural ripper/subsoiler; however, this depth may be adjusted in rocky or shallow soils. Chiseling/ripping will be performed at the minimum depth of topsoil. Cultipacking or disking may be required to reduce soil clod size. Ripping with construction style shanks, for the purpose of surface ridge roughness as a stormwater BMP, is only allowed to a six-inch depth, and will be maintained following any precipitation or surface erosion which has the potential to compromise the BMP.

3.4.2 Leveling

All areas will be leveled and graded to drain properly and blend to the adjacent, natural landscape. Leveling will generally be completed with a motor grader, but can also include a dozer, landplane and other pieces of equipment based on soil and topography.

3.4.3 Soil Amendments

Necessary amendments will be determined by soil analysis completed during Topsoil Protection Plan Site Investigation, land use, site conditions at time of interim reclamation, and surface owner consultation. Soil amendments will be incorporated during seedbed preparation.

3.4.4 Seedbed Preparation

Seedbed preparation will be completed by disking, harrowing or cultipacking disturbed soil to provide a seedbed that is firm and friable. Seeding will not occur until after a proper seedbed is prepared, soil amendments applied, and all disturbed soil is viable for germination.

3.4.5 Surface Rock Removal

Surface rocks that interfere with agricultural operations, seeding equipment or future mowing operations will be removed for the interim reclamation area.

3.5 Seeding

Seed mix is determined based on consultations with NRCS, CPW, and Surface Owner; also, by soil type, land use, adjacent reference area vegetation and in accordance with Rule 1202.a.6. Equipment shall be cleaned from previous mixes, soil, or debris, prior to mobilizing and commencing seeding operations between properties. In most cases, seed will be planted with a drill seeder and tractor at the appropriate depth and rate based on mix and manufacturer specifications, as referenced in Appendix B. Seeding shall not occur in windy conditions or when the soil is frozen or wet.

3.6 Mulching

Mulch will be applied within 48 hours after seeding on non-cropland. Mulch application in cropland shall be applied as requested by surface owner. If using straw or hay mulch, only mulch that has been certified as weed-free forage may be used. All mulch types must be anchored properly by methods such as crimping, disking and/or tackifier. Contractor may adjust the rate of mulch and type based on site location, soils, slopes, and time of year to maximize seeding and erosion control success.

3.7 Implement Post-Construction Stormwater Control Measures

Post-construction stormwater control measures will be installed during construction surface reduction and interim reclamation efforts. Erosion and sediment control measures will include consideration of land use, surface owner grazing practices, general location topography and flow, and potential damage to materials. Refer to Appendix C for the interim reclamation grading plan and design, as well as Section 5.0 of this plan for a list of site-specific stormwater control measures.

3.8 Weed control

Weed control measures shall be conducted in compliance with the Colorado Noxious Weed Act, C.R.S. §35-5.5-115, and the current rules pertaining to the administration and enforcement of the Colorado Noxious Weed Act.

Weed control measures shall be conducted in consultation with the Surface Owner and County/Municipality Weed Management Specialist(s) based on site specific conditions. KMOG will monitor and control noxious weeds until achieving reclamation threshold for release within reclaimed disturbance areas, including monitoring to measure success of treatments. Weed control measures employed may include mowing or removal and herbicide treatment during the appropriate growing season. During drilling, production, and reclamation operations, all disturbed areas shall be kept reasonably free of noxious weeds and undesirable species.

3.9 Interim Reclamation Completion Notice

Upon reaching desired and permitted reclamation goals based on COGCC Rule 1003.e, a Form 4 Interim Reclamation Completion Notice (IRCN) shall be submitted to document successful interim reclamation as compared to adjacent reference area(s).

4.0 INTERIM RECLAMATION STORMWATER, EROSION & SEDIMENT CONTROL MEASURES / BMPs

Measures for stormwater, erosion and sediment control will be accomplished through a combination of construction techniques, structural and non-structural controls, vegetation and re-vegetation, administrative controls, and good housekeeping practices during interim reclamation. Control measures will be implemented and adjusted with changing site conditions, as well as throughout all phases of construction. All control measures deployed will be identified on as-built maps.

A summary of stormwater control measures can be found in Appendix C of this document. A detailed description of intended structural and non-structural stormwater control measures for East Street 14-22HZ is as follows.

4.1 Structural Control Measures / BMPs

Structural control measures are established to reduce erosion and site degradation, and to minimize or mitigate off-site sediment transport in a manner effective for development and operation of an oil and gas location. The following structural control measures will be implemented at the proposed location.

4.1.1 Culvert (C)

- Culverts are used to move water under a road or crossing, or to direct flow to a designated endpoint, and are sized to manage anticipated watershed and flow rates.
- Culverts will be installed at the southeaster access point of the East Street 14-22HZ well pad and facility pad. Culverts will be evaluated at the time of construction and installed as needed.
- Permanent culverts will be reinforced with inlet and outlet protection to mitigate sediment transport and surface erosion.
- These BMPs will remain in place throughout the life of production for East Street 14-22HZ and removed during final reclamation.

4.1.2 Inlet / Outlet Protection (IP/OP)

- Inlet / outlet protection is a permeable barrier installed around a drain or culvert to filter runoff and remove sediment.
- This BMP will be installed congruently with spillways and outlets.
- Inlet and outlet protection will be installed for all permanent culverts at East Street 14-22HZ.
- Inlet and outlet protection will remain in place throughout the life of production for East Street 14-22HZ and removed during final reclamation.

4.1.3 Seed & Mulch (SM)

- Seed and mulch are utilized in disturbed areas to establish stabilization through vegetative cover.
- Seeding will take place once surface disturbing activities are complete. Topsoil stockpiles will be stabilized with seed and mulch no longer than 14-days after completion of stockpiling efforts unless weather or ground conditions are not suitable to properly create a seedbed and promote successful germination.
- Seed & mulch will be installed on all disturbed areas no longer utilized for construction, and on all topsoil stockpiles which will remain on East Street 14-22HZ for use during final reclamation. Anticipated topsoil stockpiles will be situated along the western and southern perimeter of the well pad.

- Seeding will remain in place until re-disturbed during final reclamation efforts.
- In areas to be returned to crop, the seed bed will be prepared and left for surface owner to plant during next agricultural season.

4.2 Non-Structural Control Measures / BMPs

Non-structural control measures / BMPs do not involve a structure or engineered solution. Non-structural control measures include:

4.2.1 Construction Phasing & Sequencing

- Construction phasing and sequencing will be implemented at East Street 14-22HZ to minimize the amount of surface disturbance and exposed soils to the greatest extent practicable. Interim reclamation will occur in two phases throughout the project.

4.2.2 Protection and Preservation of Existing Vegetation

- Pre-existing vegetation cover will only be removed where necessary for the operation of construction and development at East Street 14-22HZ. Trees will only be cut or trimmed to facilitate clearing, grading and safe installation of the location.
- Vegetative buffers will be preserved to the greatest extent practicable for construction and development.

4.2.3 Good Housekeeping

- Good housekeeping measures will be implemented to prevent sediment, trash and toxic or hazardous substances from entering surface waters or impacting soils. Housekeeping practices include routine inspections, regular cleaning, site and equipment organization and maintenance, and appropriate chemical storage.

5.0 INTERIM STABILIZATION

Interim reclamation will commence within twelve months from first date of production, barring any subsequent drilling, completions, or operational activities, with are required for all disturbed areas affected by construction and drilling operations which are no longer in use or needed for production. Interim reclaimed areas will be returned to their original condition as practicable, or their final land use as designated by the surface owner.

5.1 Non-Cropland

Non-crop locations will be reclaimed within six months from completion of final ground disturbing activities, per rule 1003.b. Interim stabilization in non-cropland will follow the Colorado Oil and Gas Conservation Commission (COGCC) definition and guidance: “all disturbed areas no longer in use shall be considered complete when all ground surface disturbing activities at the site have been completed, and all disturbed areas have been either built on, compacted, covered, paved, or otherwise stabilized in such a way as to minimize erosion to the extent practicable, or a uniform vegetative cover has been established that reflects pre-disturbance or reference area forbs, shrubs, and grasses with total percent plant cover of at least eighty percent (80%) of pre-disturbance levels or reference areas, excluding noxious weeds”. All non-cropland locations will be reclaimed within six months from completion of ground disturbing activities, per rule 1003.b.

5.2 Cropland

Per rule 1003.b., “All segregated soil horizons removed from crop lands shall be replaced to their original relative positions and contour and shall be tilled adequately to re-establish a proper seedbed. Any

perennial forage crops that were present before disturbance shall be re-established". All cropland locations will be reclaimed within three months from completion final ground disturbing activities.

6.0 INSPECTIONS AND MAINTENANCE

6.1 Inspections

Inspections will be conducted to document the status of construction activities, stormwater control measure placement, maintenance needs, and effectiveness, to evaluate pollution sources, and to document reclamation / interim stabilization progress. Inspections will be managed by the Stormwater Manager and SWMP Administrator and conducted by their designated representative(s). Inspection forms will document non-compliance conditions, including any release of sediment or other contaminants, additional control measures that are needed, or repair and maintenance work orders.

For sites earthwork and construction is completed, but final stabilization is not achieved due to vegetative cover, inspections shall be conducted every 30 days and exclude precipitation or melt event response. Inspections will continue until all reclaimed areas have achieved a cover of 70% the pre-construction reference vegetation (i.e., final stabilization).

Findings, inspection records and site maps are documented electronically and available within 24 hours of any inspection. All inspection records are stored for a minimum of three years after the location has achieved final stabilization.

6.2 Maintenance


For maintenance items discovered at active construction locations, action, and documentation towards completing repairs identified at the time of inspection, shall be made within 24 hours of discovery.

Maintenance items discovered post-construction will be documented and coordinate with production personnel.


Timeline for completion of maintenance items is a priority and will depend on scope; but in all cases, shall not be completed until field conditions allow for safe access, and utility clearance has been confirmed for actions requiring ground disturbance / earthwork.

APPENDIX A
SOIL PROPERTIES AND MAP

Soil Map—Weld County, Colorado, Southern Part
(EAST_STREET)

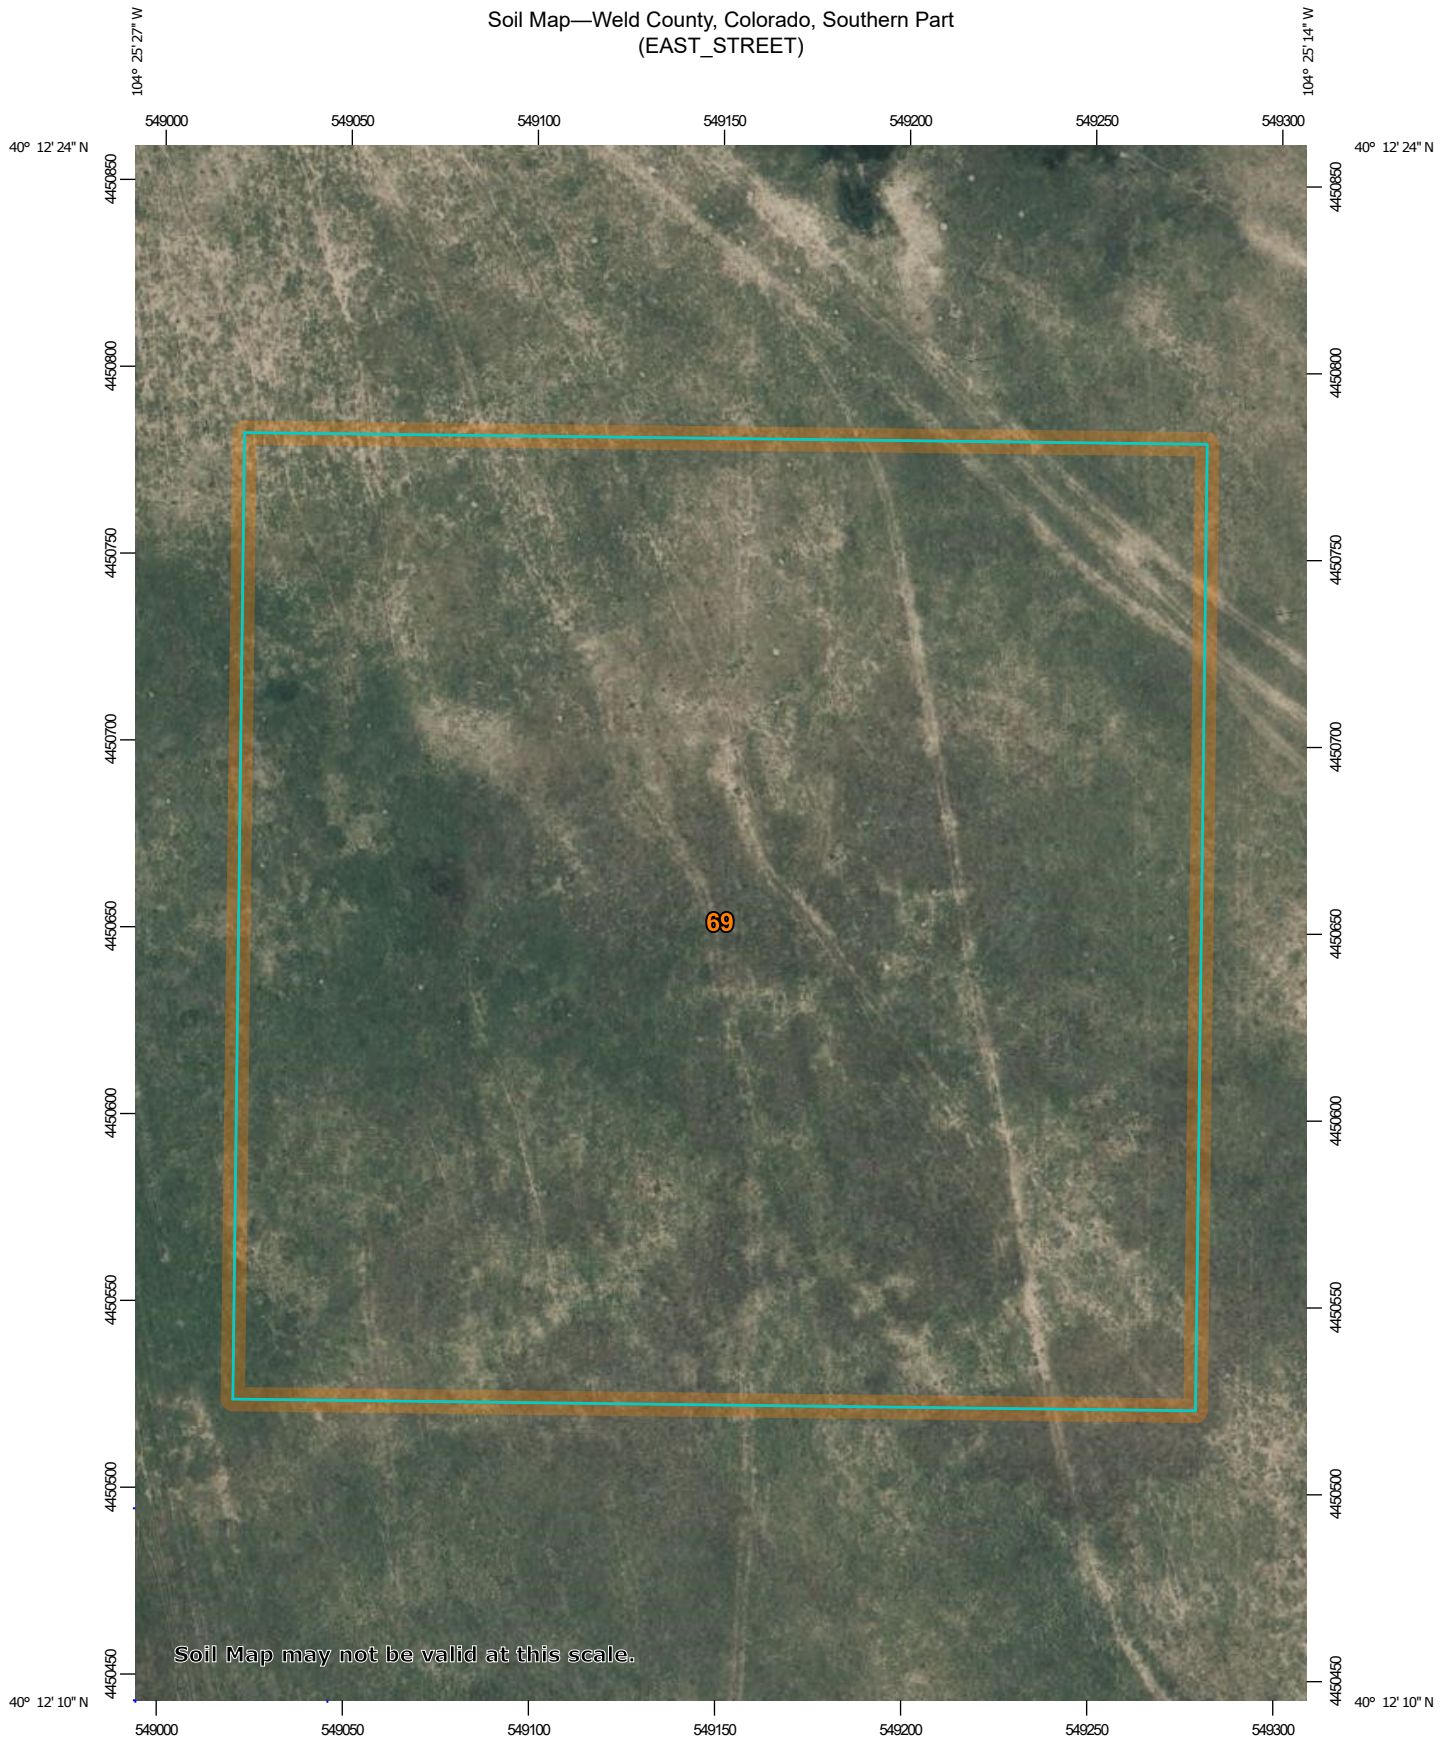

Soil Map may not be valid at this scale.

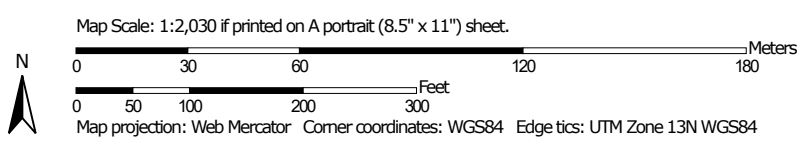

Weld County, Colorado, Southern Part

69—Valent sand, 0 to 3 percent slopes

Map Unit Setting

National map unit symbol: 2tczd

Elevation: 3,000 to 5,210 feet

Mean annual precipitation: 13 to 20 inches

Mean annual air temperature: 48 to 52 degrees F

Frost-free period: 130 to 166 days

Farmland classification: Farmland of local importance

Map Unit Composition

Valent and similar soils: 85 percent

Minor components: 15 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Valent

Setting

Landform: Interdunes

Landform position (two-dimensional): Footslope, toeslope

Landform position (three-dimensional): Base slope

Down-slope shape: Linear

Across-slope shape: Linear

Parent material: Noncalcareous eolian sands

Typical profile

A - 0 to 5 inches: sand

AC - 5 to 12 inches: sand

C1 - 12 to 30 inches: sand

C2 - 30 to 80 inches: sand

Properties and qualities

Slope: 0 to 3 percent

Depth to restrictive feature: More than 80 inches

Drainage class: Excessively drained

Runoff class: Negligible

Capacity of the most limiting layer to transmit water (Ksat): High to very high (6.00 to 39.96 in/hr)

Depth to water table: More than 80 inches

Frequency of flooding: None

Frequency of ponding: None

Calcium carbonate, maximum content: 1 percent

Maximum salinity: Nonsaline (0.1 to 1.9 mmhos/cm)

Available water supply, 0 to 60 inches: Very low (about 2.4 inches)

Interpretive groups

Land capability classification (irrigated): 4e

Land capability classification (nonirrigated): 6e

Hydrologic Soil Group: A

Ecological site: R067BY015CO - Deep Sand, R072XA021KS - Sands (North) (PE 16-20)
Hydric soil rating: No

Minor Components

Dailey

Percent of map unit: 5 percent
Landform: Interdunes
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Base slope
Down-slope shape: Linear
Across-slope shape: Concave
Ecological site: R067BY015CO - Deep Sand, R072XA022KS - Sandy (North) Draft (April 2010) (PE 16-20)
Hydric soil rating: No

Julesburg

Percent of map unit: 5 percent
Landform: Interdunes
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Base slope
Down-slope shape: Linear
Across-slope shape: Linear
Ecological site: R067BY024CO - Sandy Plains, R072XA022KS - Sandy (North) Draft (April 2010) (PE 16-20)
Hydric soil rating: No

Vona

Percent of map unit: 5 percent
Landform: Interdunes
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Base slope
Down-slope shape: Linear
Across-slope shape: Linear
Ecological site: R067BY024CO - Sandy Plains, R072XA022KS - Sandy (North) Draft (April 2010) (PE 16-20)
Hydric soil rating: No

Data Source Information

Soil Survey Area: Weld County, Colorado, Southern Part
Survey Area Data: Version 21, Sep 1, 2022

APPENDIX B

SEED MIX

**FORM 2B INTERIM RECLAMATION PLAN
(Appendix B): Seed Mix**

Project/Site Name	Location	Existing Vegetation	Operator ID
East Street 14-22HZ	T 3N: 63W Sec 22	Vegetation on the subject property is a mixture of native grasses and forbs	47120


Landowner Requested Seed Mix

CUSTOM SANDY SOIL MIX (Pawnee Buttes Seed Inc)

Species	% Mix
Little bluestem	9
Sideoats Grama	12
Switchgrass	10
Sand Bluestem	10
Big Bluestem	22
Sand Dropseed	2
Yellow Indiangrass	14
Prairie Sandreed	5
Western Wheatgrass	11
Sandlove	5
*Drill Seed rate of 8 PLS LBS/Acre	
*Seed mix is dependent on availability and may require substitution in the event of a shortage of individual species.	

APPENDIX C

INTERIM RECLAMATION GRADING PLAN

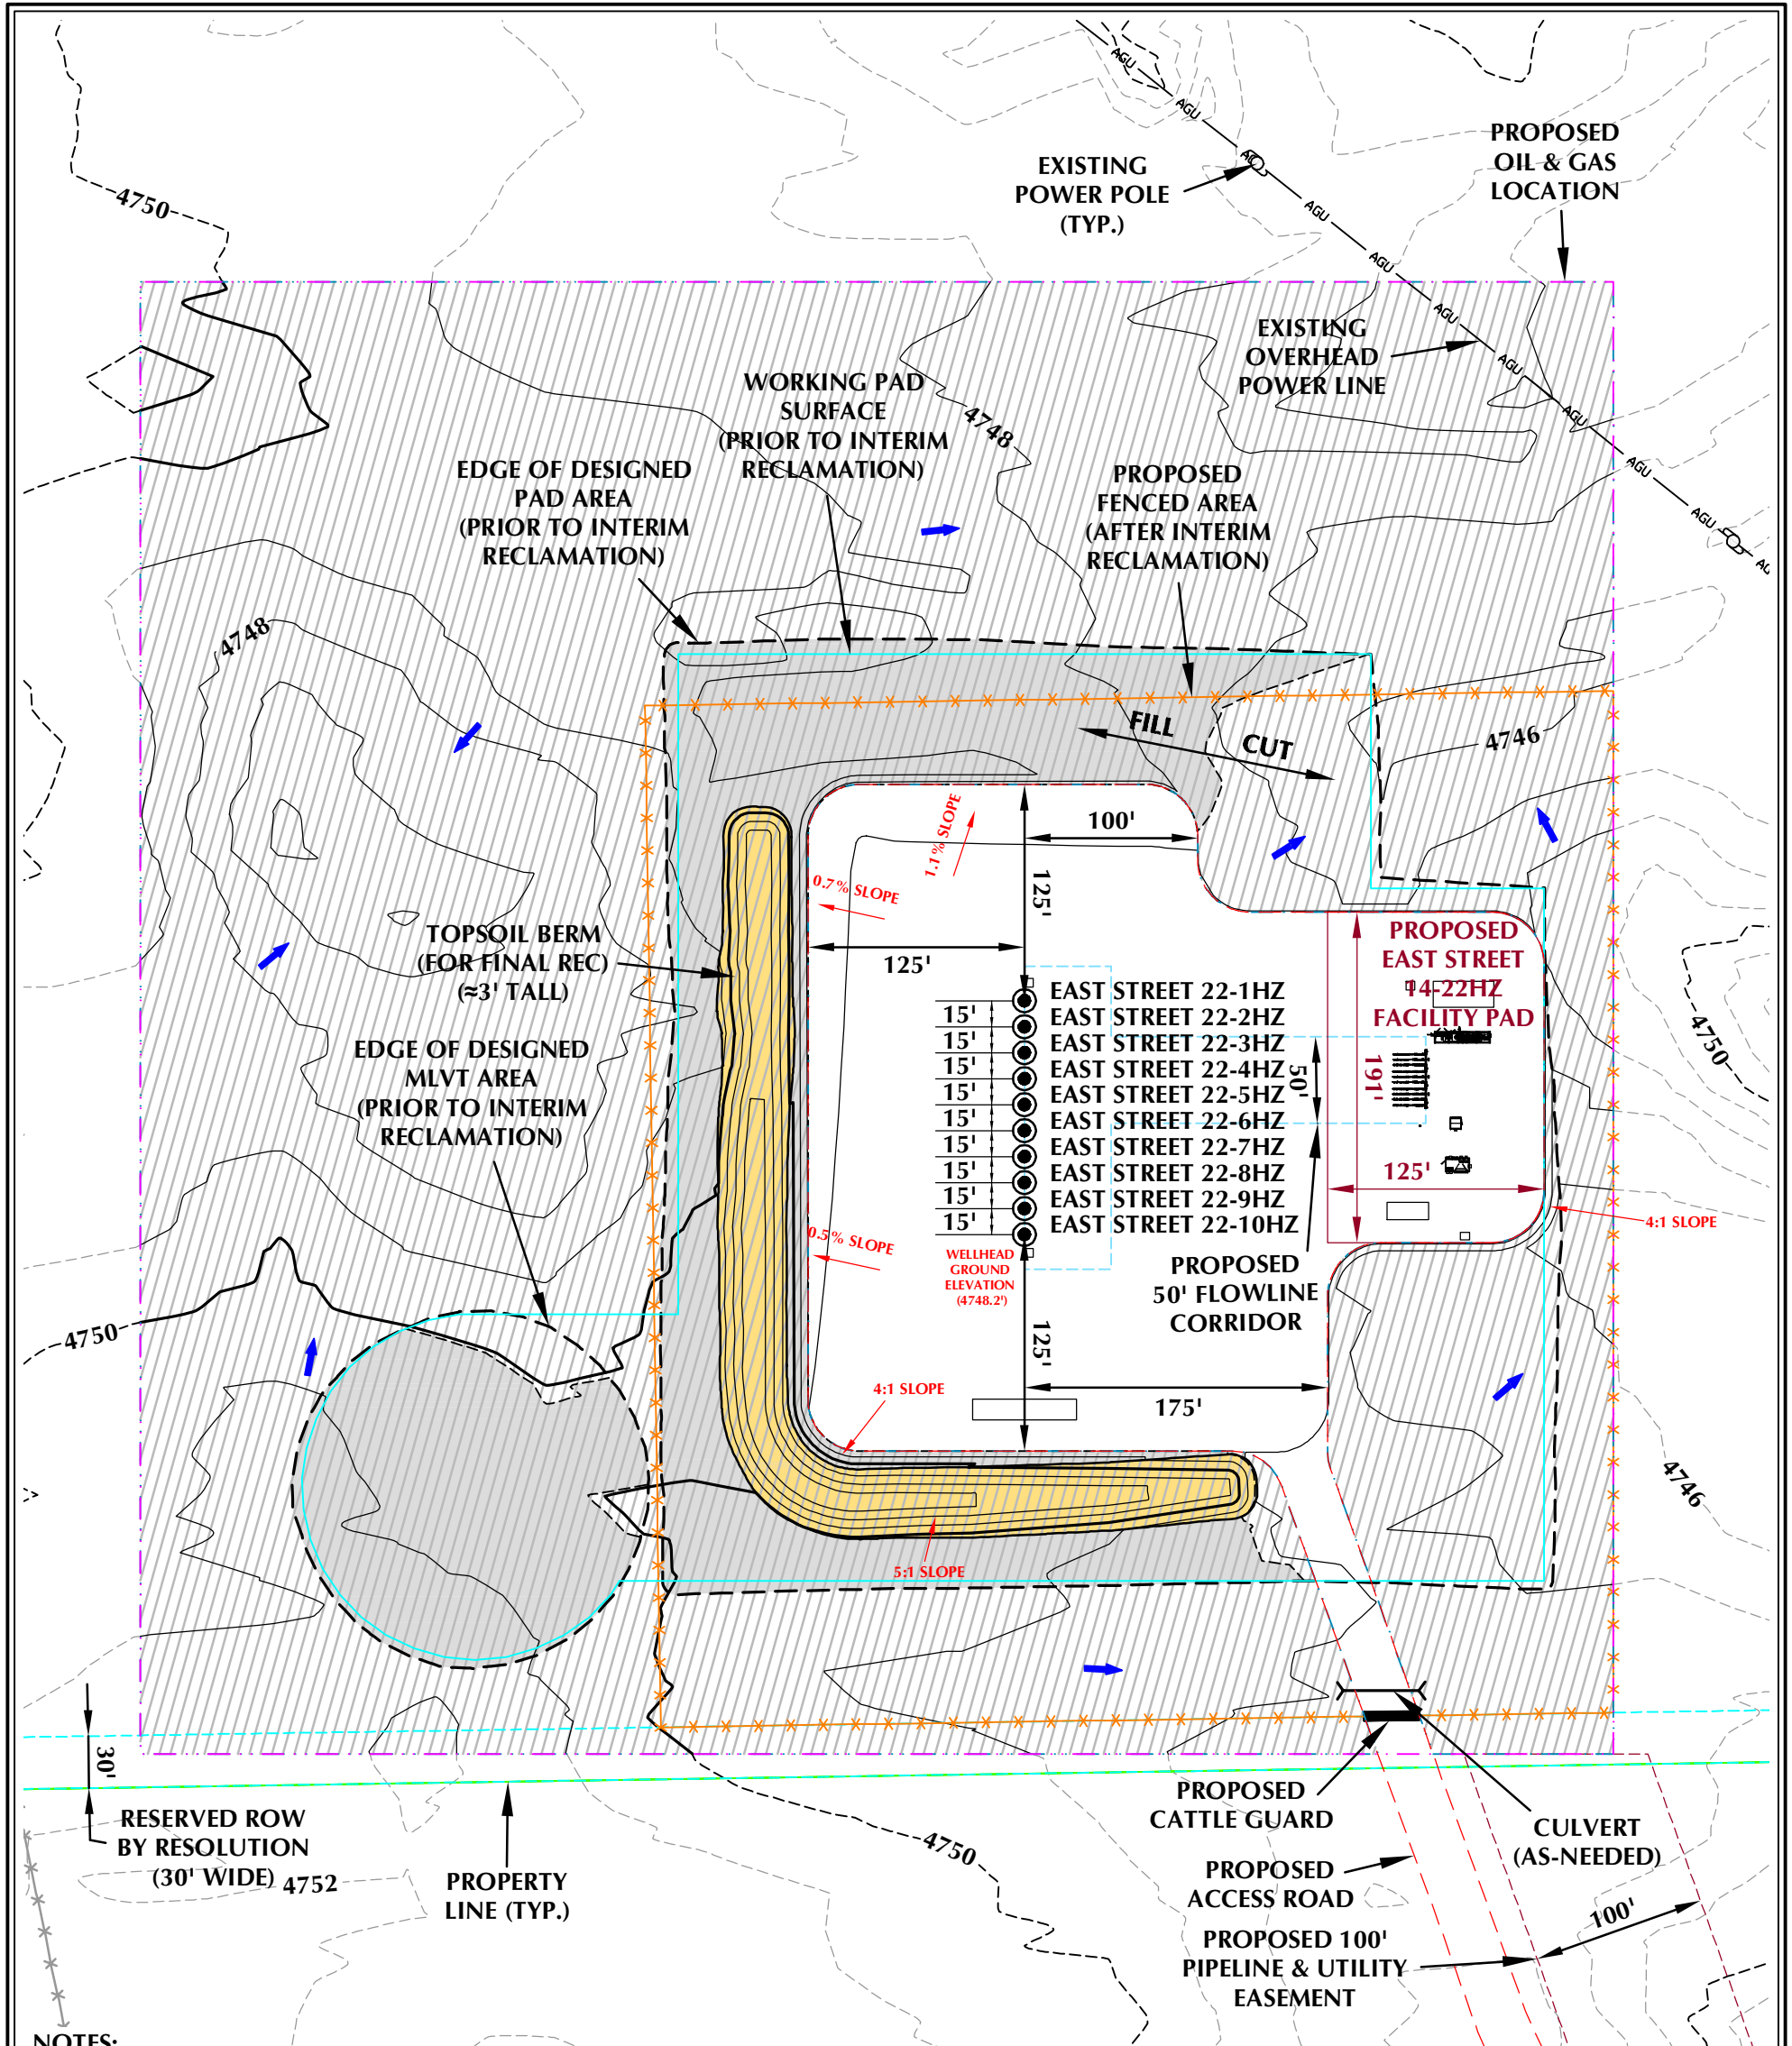

- NOTES:**
- AT THE TIME OF FILING THIS APPLICATION, PIPELINE AND UTILITY CORRIDORS WILL DISTURB APPROXIMATELY 135.83 ACRES FOR DEVELOPMENT OF THE NINE LOCATIONS INCLUDED IN THIS PROPOSED COLT OGD AND THE FUTURE OGD IN THE BRONCO CAP. THE ENTIRE PIPELINE AND UTILITY CORRIDORS MUST BE CONSTRUCTED TO SUPPORT PRODUCTION FROM THIS OGD.
 - EXISTING UTILITIES DISPLAYED ON THE GRADING PLAN ARE FOR REFERENCE PURPOSES ONLY. PRIOR TO CONSTRUCTION OR EARTHWORK, CONTRACTOR WILL BE RESPONSIBLE TO CALL FOR LOCATES: (800) 922-1987
 - RECLAIMED AREA WILL BE RE-SEEDING AND RE-VEGETATED DURING INTERIM RECLAMATION.

EAST STREET 14-22HZ FACILITY LAYOUT DRAWING

QUANTITIES AND DESIGN PARAMETERS
 SHRINKAGE FACTOR = 1.00
 SWELL FACTOR = 1.00
 PROPOSED OIL & GAS LOCATION = 16.60 ACRES
 AREA RECLAIMED DURING INTERIM RECLAMATION = 13.41 ACRES
 TOTAL PAD AREA AFTER INTERIM RECLAMATION = 3.19 ACRES
 TOTAL FENCED AREA AFTER INTERIM RECLAMATION = 7.51 ACRES

PAD QUANTITIES
 TOTAL CUT = 7,111 C.Y.
 TOTAL FILL = 7,111 C.Y.
 TOTAL TOPSOIL @ 6" DEPTH FROM CONSTRUCTION PHASE = 5,520 C.Y.
 TOPSOIL USED FOR INTERIM REC = 3,688 C.Y.
 TOPSOIL STORED FOR FINAL REC = 1,832 C.Y.

LEGEND

- EXISTING WELL LOCATION
- PROPOSED WELL LOCATION
- EXISTING CONTOURS (1' INTERVAL)
- PROPOSED CONTOURS (1' INTERVAL)
- EPL
- EXISTING PIPELINE
- PROPOSED FLOWLINE
- EXISTING FENCE
- RECLAMATION AREA
- PLANNED FLOW DIRECTION
- WORKING PAD SURFACE (WPS)

LAND USE: RANGELAND

SCALE: 1"=100'
DATE: 3/22/23
SHEET NO.: 1 OF 2

REVISIONS:

HJL
 4/11/23

EAST STREET 14-22HZ
 FACILITY LAYOUT DRAWING
 EAST STREET 22-1HZ, EAST STREET 22-2HZ,
 EAST STREET 22-3HZ, EAST STREET 22-4HZ,
 EAST STREET 22-5HZ, EAST STREET 22-6HZ,
 EAST STREET 22-7HZ, EAST STREET 22-8HZ,
 EAST STREET 22-9HZ & EAST STREET 22-10HZ
 LOCATED IN SECTION 22, T3N, R63W, 6TH P.M.
 WELD COUNTY, COLORADO

Kerr-McGee Oil & Gas Onshore LP
 1099 18th Street
 Denver, Colorado 80202

609 CONSULTING, LLC

LOVELAND OFFICE
 6706 North Franklin Avenue
 Loveland, Colorado 80538
 Phone 970-776-4331

SHERIDAN OFFICE
 1095 Saberton Avenue
 Sheridan, Wyoming 82801
 Phone 307-674-0609

K:\AMDRK\2017\2017_197_CERVL_BRANCH_T3N_R63W\OGD\99_EAST STREET.dwg, 4/11/2023 4:40:45 PM, HJL

APPENDIX D

SUMMARY OF SITE-SPECIFIC EROSION & SEDIMENT CONTROLS / BMPs

SUMMARY OF SITE-SPECIFIC STORMWATER, EROSION & SEDIMENT CONTROLS / BMPs FOR INTERIM RECLAMATION PHASE

Stormwater will be managed during the interim reclamation and production phase by a combination of site-specific erosion and sediment control measures including: a berm on the western and southern perimeter to manage run-on and run-off; stabilization of slopes and associated topsoil stockpile(s) by seed and crimped mulch application; ~1 permanent culverts with inlet & outlet protection and a cattle guard may be installed at southeastern access point, as determined in the field during construction. Post construction, daily inspections will be completed by on-site operations personnel. A third-party consultant will conduct stormwater compliance inspections every 30-days until final stabilization is achieved. Inspections will review all control measures / BMPs implemented, their status, and whether repair or replacement is needed, including weed maintenance when necessary. Maintenance and repair will be completed as soon as practicable, immediately in most cases.