



**Kerr-McGee Oil & Gas Onshore LP**

**Stormwater Management Plan**

**5 Minutes to Midnight 8-34HZ Well Pad and Facility**

**NE  $\frac{1}{4}$  SE  $\frac{1}{4}$  & SE  $\frac{1}{4}$  NE  $\frac{1}{4}$ , Sec 34, T4N, R63W**

**Weld County, Colorado**

**December, 2023**

## TABLE OF CONTENTS

1.0	INTRODUCTION .....	1
2.0	SITE DESCRIPTION .....	1
3.0	PROPOSED SEQUENCE OF MAJOR ACTIVITIES.....	2
4.0	POTENTIAL POLLUTANT SOURCES .....	2
5.0	STORMWATER, EROSION & SEDIMENT CONTROL MEASURES / BMPS.....	2
5.1	Structural Control Measures / BMPs .....	3
5.2	Non-Structural Control Measures / BMPs .....	4
6.0	MATERIALS HANDLING AND SPILL PREVENTION .....	5
7.0	NON-STORMWATER DISCHARGES .....	5
8.0	FINAL STABILIZATION .....	5
9.0	POST-CONSTRUCTION STORMWATER.....	6
10.0	INSPECTION AND MAINTENANCE PROCEDURES .....	6
10.1	Inspections.....	6
10.2	Maintenance .....	6

## APPENDICES

APPENDIX A	CDPS STORMWATER GENERAL PERMIT CERTIFICATION
APPENDIX B	GRADING PLAN(S) AND DRAINAGE REPORT
APPENDIX C	SUMMARY OF SITE-SPECIFIC EROSION & SEDIMENT CONTROLS / BMPS

## 1.0 INTRODUCTION

Kerr-McGee Oil & Gas Onshore LP (Kerr-McGee) has prepared this site-specific Stormwater Management Plan (SWMP) for construction activities in Weld County, Colorado. The SWMP is intended to ensure construction activities adhere to good engineering, hydrologic, and pollution control practices, and to ensure erosion, sediment and stormwater control measures are selected, installed, implemented, and maintained to protect state waters, and minimize site erosion or degradation. This facility is a part of Kerr-McGee's Area 4 operations and is covered under CDPS Permit COR402543.

## 2.0 SITE DESCRIPTION

Operator:	Kerr-McGee Oil & Gas Onshore LP
Project / Site Name:	5 Minutes to Midnight 8-34HZ Well Pad and Facility
Location:	Sec. 34, T4N, R63W, Weld County, Colorado
Total Area of Project:	16.60 acres
Description of Existing Vegetation:	Existing vegetation on the subject property is disturbed grassland, primary use is rangeland / pastureland.
Percentage of Existing Vegetation Cover:	Percentage of existing vegetation cover on the location is 70%.  Method for determination: National Resource Conservation Service (NRCS) soil survey data, and on-site assessment at the time of pit excavation for planning and permitting purposes.
Soil Type(s):	70 – Valent sand, 3 to 9 percent slopes, HSG: A
Stream Crossings:	There are no stream crossings associated with the proposed location.
Primary Receiving Water:	There are no surface waters within 2640 feet of the proposed location.
Operator ID:	47120
CDPS Permit:	COR402543
Stormwater Manager:	Lynna Scranton, HSE Director Occidental Petroleum Corporation Office: (720) 929-6317
SWMP Administrator:	Austin Lee, HSE Advisor Occidental Petroleum Corporation Office: (970) 515-1058
Emergency Contact:	Integrated Operation Center (IOC) Office: (970) 515-1500

### 3.0 PROPOSED SEQUENCE OF MAJOR ACTIVITIES

- |   |  |  |   |   |
|---|--|--|---|---|
| <input checked="" type="checkbox"/> Delineation of Disturbance Limits | <input checked="" type="checkbox"/> Access Road Construction         | <input checked="" type="checkbox"/> Perimeter /Control Measures Installation | <input checked="" type="checkbox"/> Grading, stripping, excavation, earthwork | <input checked="" type="checkbox"/> Well drilling & Completions |
| <input checked="" type="checkbox"/> Facility Construction             | <input checked="" type="checkbox"/> Pipeline & Flowline Installation | <input checked="" type="checkbox"/> Disturbance Reduction                    | <input checked="" type="checkbox"/> Interim & Final Reclamation               | <input type="checkbox"/> Return to Agriculture                  |

All construction and development shall be in accordance with the Colorado Department of Public Health and Environment's CDPS General Permit for Stormwater Discharges Associated with Construction Activity, and the Colorado Energy and Carbon Management Commission (ECMC) 304.c.15 and 1002.f rules and requirements.

### 4.0 POTENTIAL POLLUTANT SOURCES

Potential pollution sources shall be placed within the project construction boundary, designated staging area(s), working surface, contained by general or sized secondary containment, and stormwater perimeter controls. Anticipated pollution sources which will be managed by appropriate BMP fact sheets or operational best management standard operating procedures include, but are not limited to:

- |   |   |  |
|---|---|--|
| <input checked="" type="checkbox"/> Disturbed and stored soils    | <input checked="" type="checkbox"/> Vehicle/equipment maintenance and fueling | <input type="checkbox"/> Non-industrial waste          |
| <input checked="" type="checkbox"/> Vehicle tracking of sediments | <input checked="" type="checkbox"/> Dust generating processes                 | <input checked="" type="checkbox"/> Potential Spills   |
| <input type="checkbox"/> Management of contaminated soils         | <input checked="" type="checkbox"/> Routine maintenance activities            | <input type="checkbox"/> Spill prevention and response |
| <input checked="" type="checkbox"/> Loading/unloading ops         | <input checked="" type="checkbox"/> On-site waste management                  |  |
| <input checked="" type="checkbox"/> Outdoor storage activities    | <input type="checkbox"/> Concrete truck washing                               |  |

No dedicated concrete or asphalt batch plants will be at the project location. Safety Data Sheets (SDS) for materials to be used are maintained by Kerr-McGee. Pollutants shall be managed in accordance with waste regulations administered by ECMC 900 series rules.

### 5.0 STORMWATER, EROSION & SEDIMENT CONTROL MEASURES / BMPS

Measures for stormwater, erosion and sediment control will be accomplished through a combination of construction techniques, structural and non-structural controls, vegetation and re-vegetation, administrative controls, and good housekeeping practices. Control measures will be implemented and adjusted with changing site conditions, as well as phases of construction. All control measures deployed throughout construction shall be identified on the site-specific stormwater management plan (grading plan), as well on as-built plans verified in the field.

A summary of stormwater control measures can be found in Appendix C of this document. A detailed description of intended structural and non-structural stormwater control measures for 5 Minutes to Midnight 8-34HZ is as follows.

### **5.1 Structural Control Measures / BMPs**

Structural control measures are established to reduce erosion and site degradation, and to minimize or mitigate off-site sediment transport in a manner effective for development and operation of an oil and gas location. The following structural control measures will be implemented at the proposed location:

#### **5.1.1 Limits of Construction (LOC)**

- Limits of construction will be used to designate the area of intended development and areas intended for surface disturbing activities.
- The LOC will be identified prior to commencement of surface disturbing activities, on the location grading plan, and in-field with wooden survey lathe / staking to delineate the boundary.
- The LOC surrounds the entirety of 5 Minutes to Midnight 8-34HZ.
- LOC will remain in-place until interim reclamation activities are complete.

#### **5.1.2 Vehicle Tracking Control (VTC)**

- Vehicle tracking controls will serve as a stabilized site access point which removes sediment from vehicle tires and mitigates off-site tracking onto paved surfaces.
- VTC will be installed prior to commencement of surface disturbing activities.
- VTC will be installed at the primary access for 5 Minutes to Midnight 8-34HZ, which is to the east of both the well pad and facility pad. The access road adjoins/intersects Highway 34, approximately 3.85 miles north of the location.
- VTC will remain in place until interim reclamation activities are complete.

#### **5.1.3 Temporary Diversion Ditch and Berm (DD)**

- A diversion ditch and berm will be implemented to divert stormwater run-on & run-off throughout 5 Minutes to Midnight 8-34HZ to a designated outlet structure(s).
- This BMP will be installed prior surface disturbing activities and will surround the entirety of the location to create continuous perimeter control.
- Diversion ditch and berm will remain in-place until interim reclamation activities are complete.

#### **5.1.4 Temporary Spillway and Outlet (SW/O)**

- A temporary spillway and/or outlet is designed to capture sediment transported in surface runoff and slowly release flows to allow time for settling of sediment prior to discharge from the location.
- Spillway and/or outlet will be installed concurrently with the facility and well pad diversion ditch and berm, and prior to commencement of surface disturbing activities.
- A temporary spillway/outlet will be installed in the northern, eastern, southern, and southwestern segments of the disturbance area ditch and for 5 Minutes to Midnight 8-34HZ.
- All spillways and outlets will remain in-place until interim reclamation activities are complete.

#### **5.1.5 Culvert (C)**

- Culverts are used to move water under a road or crossing, or to direct flow to a designated endpoint, and are sized to manage anticipated watershed and flow rates.
- A Culvert will be installed at the eastern location access points for 5 Minutes to Midnight 8-34HZ well pad and facility pad. Additional culverts will be evaluated at the time of construction and installed as needed.
- Culverts will be reinforced with inlet and outlet protection to mitigate sediment transport and surface erosion.
- These BMPs will remain in place throughout the life of construction for 5 Minutes to Midnight 8-34HZ and removed during interim reclamation.

#### **5.1.6 Inlet / Outlet Protection (IP/OP)**

- Inlet / outlet protection is a permeable barrier installed around a drain or culvert to filter runoff and remove sediment.
- This BMP will be installed prior to commencement of surface disturbing activities.
- Inlet and outlet protection will be installed for all permanent culverts, temporary spillways, and temporary outlets at 5 Minutes to Midnight 8-34HZ.
- Inlet and outlet protection will remain in place on all permanent features throughout the life of production for 5 Minutes to Midnight 8-34HZ and removed during final reclamation.

#### **5.1.7 Seed & Mulch (SM)**

- Seed and mulch are utilized in disturbed areas to establish stabilization through vegetative cover.
- Seeding will take place once surface disturbing activities are complete. Topsoil stockpiles will be stabilized with seed and mulch no longer than 14-days after completion of stockpiling efforts unless weather or ground conditions are not suitable to properly create a seedbed and promote successful germination.
- Seed & mulch will be installed on all disturbed areas no longer utilized for construction, and on all topsoil stockpiles which will remain on 5 Minutes to Midnight 8-34HZ for use during interim and final reclamation. Anticipated topsoil stockpiles will be situated along the western perimeter of the well pad.
- Seed and mulch will be disturbed and re-applied during topsoil application and final reclamation practices.

### **5.2 Non-Structural Control Measures / BMPs**

Non-structural control measures / BMPs do not involve a structure or engineered solution. Non-structural control measures include:

#### **5.2.1 Construction Phasing & Sequencing**

- Construction phasing and sequencing will be implemented at 5 Minutes to Midnight 8-34HZ to minimize the amount of surface disturbance and exposed soils to the greatest extent practicable.

#### **5.2.2 Construction Site Waste Management**

- All waste from materials imported to 5 Minutes to Midnight 8-34HZ will be placed in containment bins, and removed for disposal/recycling at an approved, licensed facility.
- Self-contained port-o-lets will be placed on both the facility and well pad at 5 Minutes to Midnight 8-34HZ and maintained by a licensed contractor at a frequency appropriate based on daily use.
- No waste materials will be buried or dumped on 5 Minutes to Midnight 8-34HZ.

#### **5.2.3 Protection and Preservation of Existing Vegetation**

- Pre-existing vegetation cover will only be removed where necessary for the operation of construction and development at 5 Minutes to Midnight 8-34HZ. Trees will only be cut or trimmed to facilitate clearing, grading and safe installation of the location.
- Vegetative buffers will be preserved to the greatest extent practicable for construction and development.

#### **5.2.4 Good Housekeeping**

- Good housekeeping measures will be implemented to prevent sediment, trash and toxic or hazardous substances from entering surface waters or impacting soils. Housekeeping practices include routine inspections, regular cleaning, site and equipment organization and maintenance, and appropriate chemical storage.

#### **5.2.5 Materials Management**

- Materials stored on 5 Minutes to Midnight 8-34HZ will be kept away from direct traffic to prevent accidents.
- Dumpsters and trash receptacles will be enclosed and/or covered to prevent dissemination of rubbish when not in use.
- Storage areas will be swept for trash / rubbish, and cleanup coordinated by construction personnel.
- Drums and chemical storage containers will be clearly labeled, and an appropriate SDS kept on file to be made available for on-site personnel as needed.

#### **5.2.6 Training and Certification**

- All personnel involved with construction and stormwater activities will be adequately trained and familiarized with the applicable CDPS stormwater permit, local/State regulations, requirements for the stormwater permit, and identification of potential pollutant sources.
- Training(s) will cover information and procedures identified in this SWMP, and will be conducted prior to the start of construction, and as needed.
- Training is considered initial and ongoing for all personnel involved with construction and development at 5 Minutes to Midnight 8-34HZ.

### **6.0 MATERIALS HANDLING AND SPILL PREVENTION**

Discharges of hazardous substances or oil resulting from spills or construction operations are not authorized under the Construction General Permit or this plan. Spills and leaks will be managed by Kerr-McGee personnel or their designee, and according to the Kerr-McGee *Wattenberg Field, Colorado Spill Prevention, Control and Countermeasures (SPCC)* Plan. Kerr-McGee personnel and designees are trained to prevent, mitigate, evaluate, and response to spills and releases. **In the event of a spill, notify the Stormwater Manager, after taking emergency and internal procedures for notification.** Depending on the nature of the spill and material involved, the Colorado Department of Public Health and Environment 24-hour spill reporting line (877-518-5608) will be contacted and/or downstream water users notified, as necessary.

### **7.0 NON-STORMWATER DISCHARGES**

Sources of non-stormwater discharges include emergency fire-fighting activities or a fire hydrant, uncontaminated springs which do not originate from an area of land disturbance, and construction dewatering. In the event of construction dewatering, control measures shall be implemented and Low Risk Discharge Guidance for Uncontaminated Groundwater to Land (WQP27) shall be followed.

### **8.0 FINAL STABILIZATION**

All soil horizons segregated for the purpose of construction shall be replaced to their original relative positions and contour for reclamation and final stabilization. Following topsoil re-distribution, the reclamation area shall be cross ripped to alleviate compaction. Soil amendments will be determined and applied as necessary, and incorporated by disking, harrowing or cultipacking during seedbed preparation.

Seed used for reclamation will be determined based on surface owner consultation, and consider soil type, land use, and adjacent reference area(s) vegetation. The approved seed mix, in combination with certified weed-free mulch, will be installed when seasonal or weather conditions are most favorable to take advantage of moisture, such as early spring or late fall, and never during windy or frozen conditions.

The Colorado Department of Health and Environment (CDPHE) defines final stabilization as, “finally stabilized means that all ground surface disturbing activities at the site have been completed, and all

disturbed areas have been either built on, paved, or a uniform vegetative cover has been established with an individual plant density of at least 70 percent of pre-disturbance levels, and the vegetation cover is capable of providing erosion control equivalent to pre-existing conditions, or equivalent permanent, physical erosion reduction methods have been employed.” Stabilized unpaved surfaces, such as gravel access roads or working surfaces, necessary for the operation of the facility or nearby facilities, also qualifies as “final stabilized”.

## **9.0 POST-CONSTRUCTION STORMWATER**

Following final stabilization, and pursuant of ECMC rule 1002.f and rule 1004, BMPs shall be maintained under Kerr-McGee’s Post-Construction Stormwater Program, and evaluated for Tier 1 / Non-Tier 1 status as applicable and per ECMC 100 series definitions, until the facility is abandoned, and final reclamation is achieved.

## **10.0 INSPECTION AND MAINTENANCE PROCEDURES**

### **10.1 Inspections**

Inspections will be conducted to document the status of construction activities, stormwater control measure placement, maintenance needs, and effectiveness, to evaluate pollution sources, and to document reclamation / final stabilization progress. Inspections will be managed by the Stormwater Manager and SWMP Administrator and conducted by their designated representative(s). Inspection forms will document non-compliance conditions, including any release of sediment or other contaminants, additional control measures that are needed, or repair and maintenance work orders.

During construction, inspections shall be conducted every 14 days, and after a major precipitation or melt event, which has the potential to cause surface runoff.

For sites earthwork and construction is completed, but final stabilization is not achieved due to vegetative cover, inspections shall be conducted every 30 days and exclude precipitation or melt event response. Inspections will continue until all reclaimed areas have achieved a cover of 70% the pre-construction reference vegetation (i.e. final stabilization).

Findings, inspection records and site maps are documented electronically and available within 24 hours of any inspection. All inspection records are stored for a minimum of three years after the location has achieved final stabilization.

### **10.2 Maintenance**

For maintenance items discovered at active construction locations, action and documentation towards completing repairs identified at the time of inspection, shall be made within 24 hours of discovery.

Maintenance items discovered post-construction will be documented and coordinate with production personnel.

Timeline for completion of maintenance items are a priority and will depend on scope; but in all cases, shall not be completed until field conditions allow for safe access, and utility clearance has been confirmed for actions requiring ground disturbance / earthwork.



**APPENDIX A**

**CDPS STORMWATER GENERAL PERMIT CERTIFICATION**



**COLORADO**

Department of Public  
Health & Environment

**CERTIFICATION TO DISCHARGE  
UNDER  
CDPS GENERAL PERMIT COR400000  
STORMWATER ASSOCIATED WITH CONSTRUCTION ACTIVITIES**

Certification Number: **COR402543**

**This Certification to Discharge specifically authorizes:**

**Owner Kerr McGee Oil and Gas Onshore LP  
Operator Kerr McGee Oil and Gas Onshore LP  
to discharge stormwater from the facility identified as**

**Kerr Area 4**

**To the waters of the State of Colorado, including, but not limited to:**

**South Platte River**

**Facility Activity :** Oil and Gas Exploration and Well Pad Development

**Disturbed Acres:** 101.9 acres

**Facility Located at:** See Map in File Greeley CO 80620  
Weld County  
Latitude 40.01 Longitude -104.596

**Specific Information  
(if applicable):**


**Certification is issued and effective: 9/30/2021  
Expiration date of general permit: 3/31/2024**

This certification under the permit requires that specific actions be performed at designated times. The certification holder is legally obligated to comply with all terms and conditions of the permit.

This certification was approved by:  
Meg Parish, Section Manager  
Permits Section  
Water Quality Control Division



**APPENDIX B**  
**GRADING PLANS**

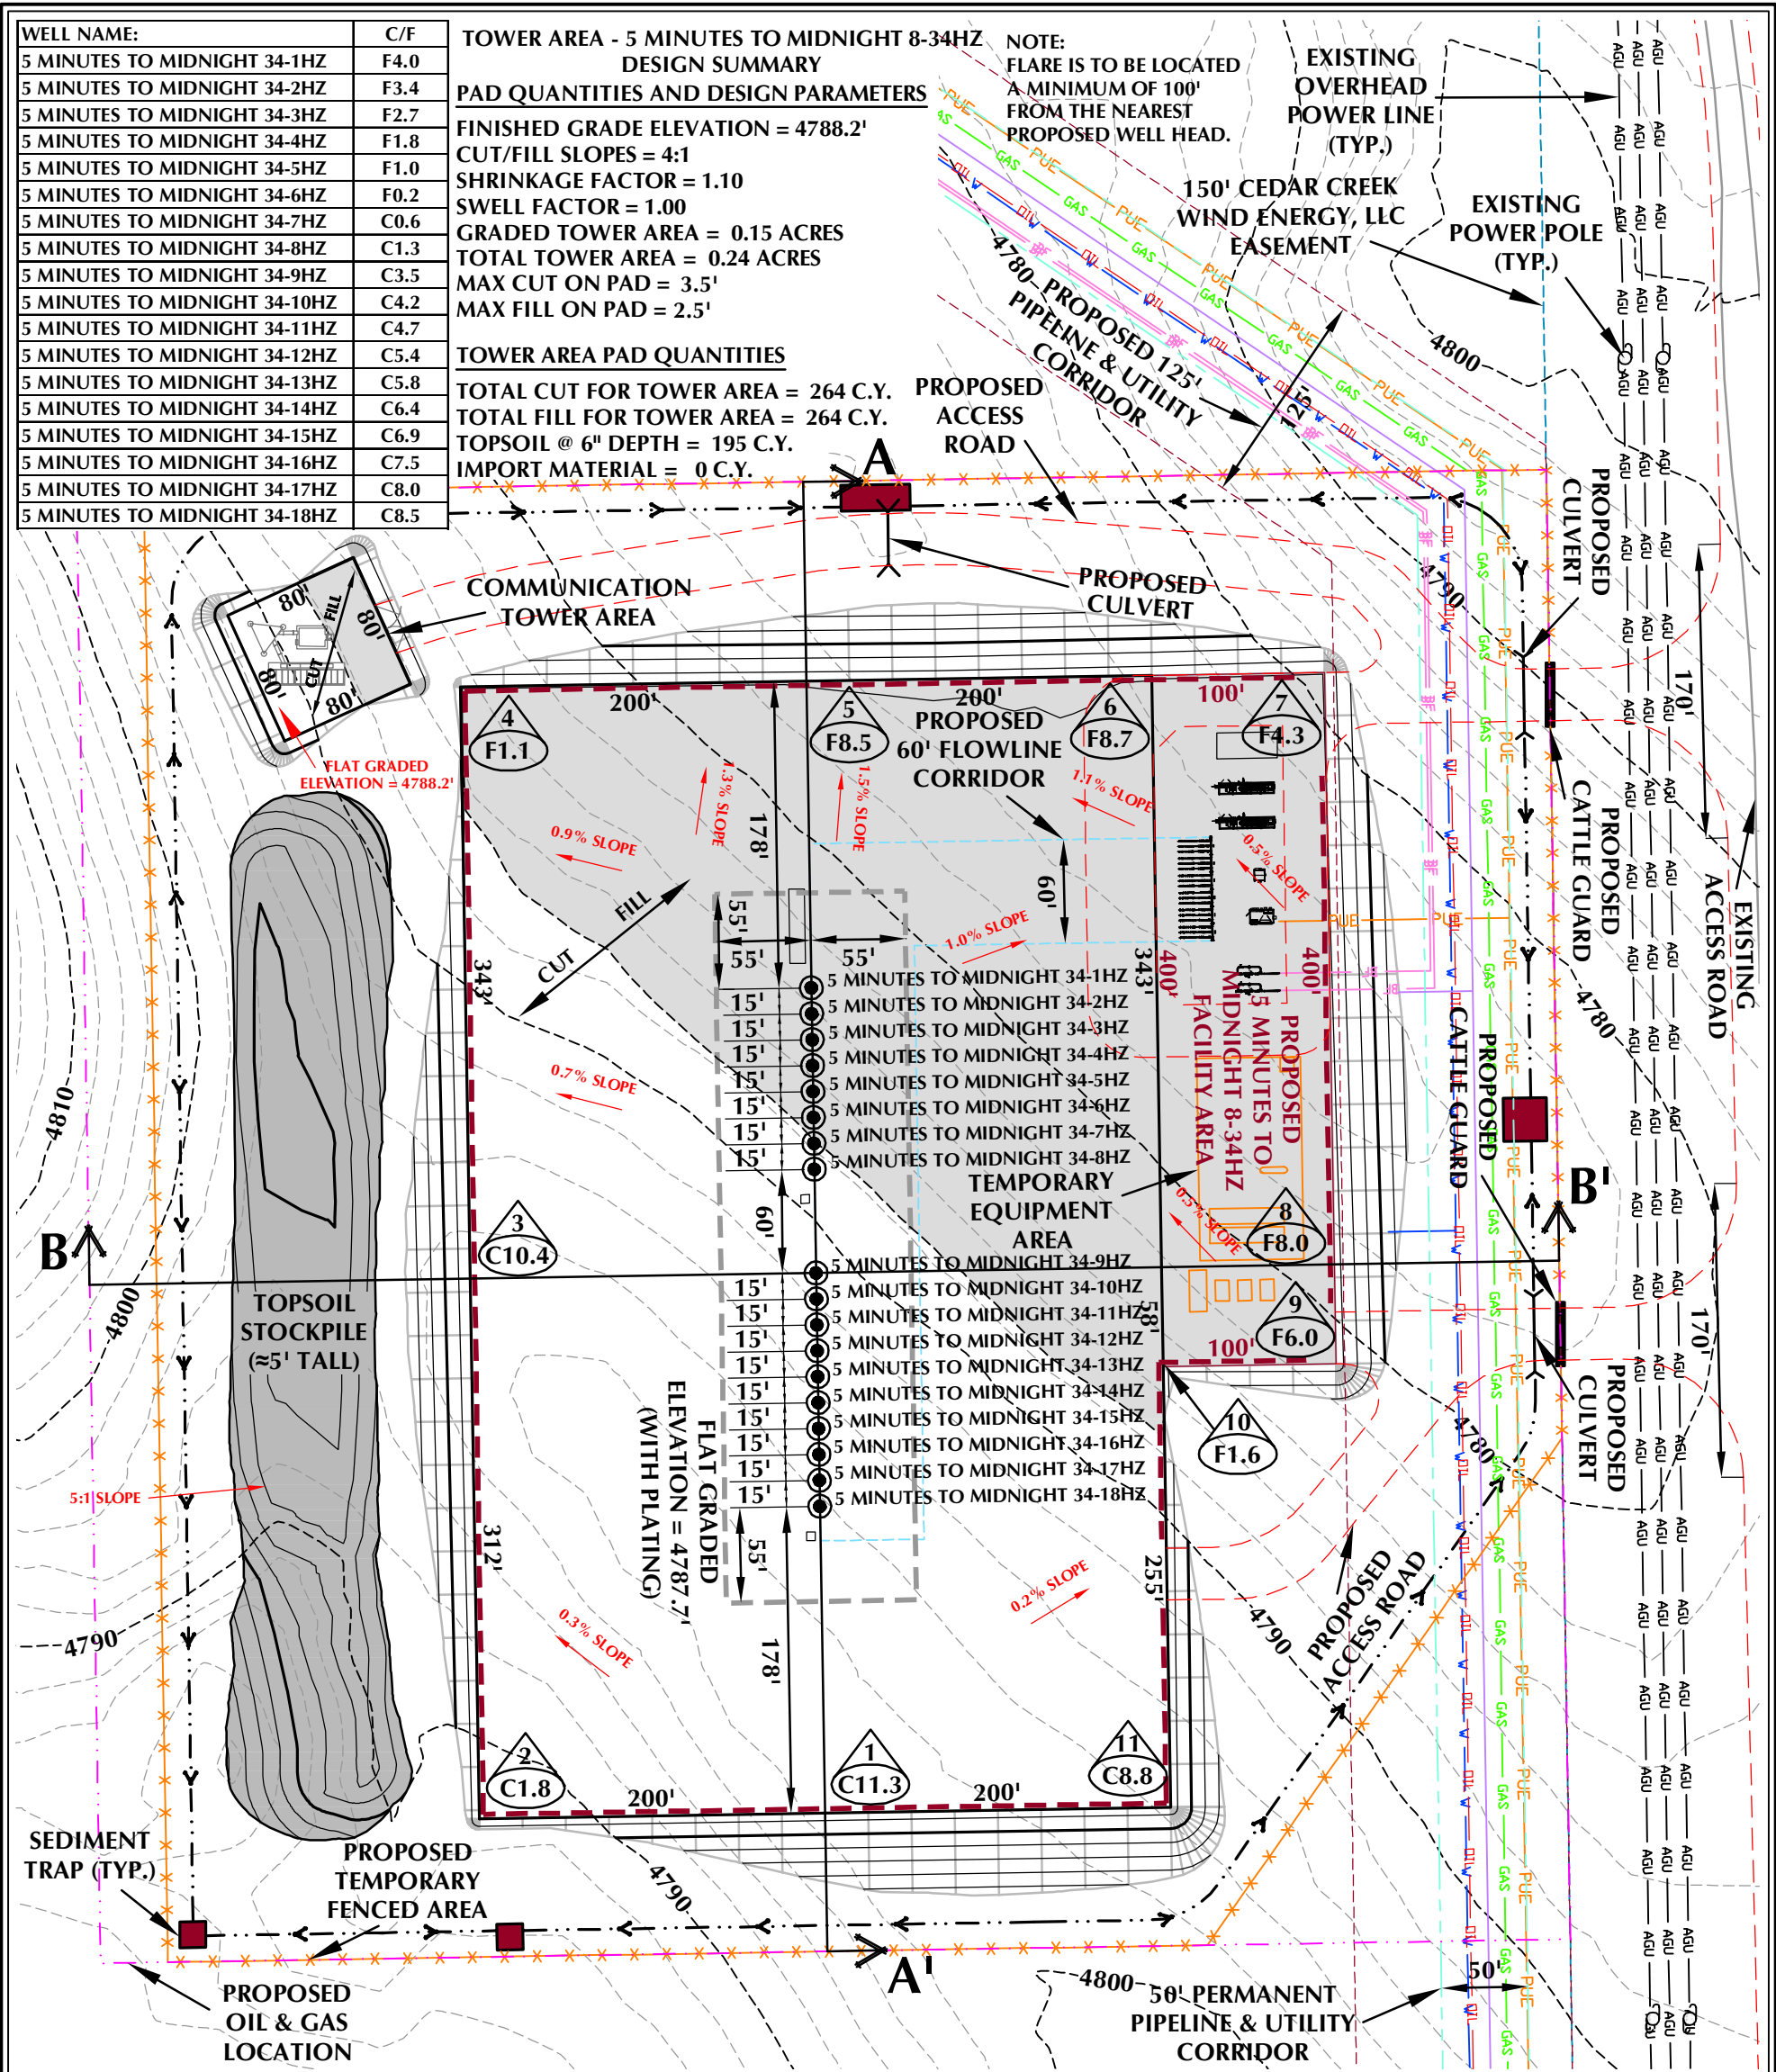

NOTES:

- EXISTING UTILITIES DISPLAYED ON THE GRADING PLAN ARE FOR REFERENCE PURPOSES ONLY. PRIOR TO CONSTRUCTION OR EARTHWORK, CONTRACTOR WILL BE RESPONSIBLE TO CALL FOR LOCATES: (800) 922-1987
- DIVERSION DITCH AND/OR BERM TO BE CONSTRUCTED AROUND THE ENTIRE PAD LOCATION. BERM SECTIONS TO BE COMPACTED IN ACCORDANCE WITH STANDARD CONSTRUCTION PRACTICES.
- CENTER OF WELL PAD REFERENCED BELOW CORRESPONDS TO THE SURFACE LOCATION OF THE 5 MINUTES TO MIDNIGHT 34-9HZ WELL.
- FLAT GRADED AREA TO BE RECLAIMED DURING INTERIM RECLAMATION.
- CONTOURS DISPLAYED ARE GENERATED USING SURFACE INCLUDING PLATING MATERIAL. PLATING TO BE PLACED FOR STRONGBACK MATERIAL AND ACROSS ENTIRE GRADED PAD AT 8" DEPTH.

**PAD - 5 MINUTES TO MIDNIGHT 8-34HZ DESIGN SUMMARY**

**QUANTITIES AND DESIGN PARAMETERS**

EXISTING GRADE @ CENTER OF PAD = 4791.2'

FINISHED GRADE ELEVATION = 4787.7' (WITH PLATING)

CUT/FILL SLOPES = 4:1

SHRINKAGE FACTOR = 1.10

SWELL FACTOR = 1.00

GRADED PAD SURFACE AREA = 6.93 ACRES

TOTAL PAD AREA = 8.37 ACRES

TOTAL FENCED AREA = 15.14 ACRES

PROPOSED OIL & GAS LOCATION = 16.60 ACRES

**PAD QUANTITIES**

TOTAL CUT FOR PAD = 45,304 C.Y.

TOTAL FILL FOR PAD = 45,304 C.Y.

TOPSOIL @ 6" DEPTH = 6,752 C.Y.

STRONGBACK PLATING MATERIAL = 3,189 C.Y.

PLATING MATERIAL @ 8" DEPTH = 7,784 C.Y.

TOTAL PLATING MATERIAL = 10,973 C.Y.

**PAD - 5 MINUTES TO MIDNIGHT 8-34HZ**

PAD - GRADING PLAN

5 MINUTES TO MIDNIGHT 34-1HZ, 5 MINUTES TO MIDNIGHT 34-2HZ,

5 MINUTES TO MIDNIGHT 34-3HZ, 5 MINUTES TO MIDNIGHT 34-4HZ,

5 MINUTES TO MIDNIGHT 34-5HZ, 5 MINUTES TO MIDNIGHT 34-6HZ,

5 MINUTES TO MIDNIGHT 34-7HZ, 5 MINUTES TO MIDNIGHT 34-8HZ,

5 MINUTES TO MIDNIGHT 34-9HZ, 5 MINUTES TO MIDNIGHT 34-10HZ,

5 MINUTES TO MIDNIGHT 34-11HZ, 5 MINUTES TO MIDNIGHT 34-12HZ,

5 MINUTES TO MIDNIGHT 34-13HZ, 5 MINUTES TO MIDNIGHT 34-14HZ,

5 MINUTES TO MIDNIGHT 34-15HZ, 5 MINUTES TO MIDNIGHT 34-16HZ,

5 MINUTES TO MIDNIGHT 34-17HZ & 5 MINUTES TO MIDNIGHT 34-18HZ

LOCATED IN SECTION 34, T4N, R63W, 6TH P.M.

WELD COUNTY, COLORADO

**Kerr-McGee Oil & Gas Onshore LP**

1099 18th Street

Denver, Colorado 80202

**609 CONSULTING, LLC**

LOVELAND OFFICE

6706 North Franklin Avenue

Loveland, Colorado 80538

Phone 970-776-4331

SHERIDAN OFFICE

1095 Saberton Avenue

Sheridan, Wyoming 82801

Phone 307-674-0609

**LEGEND**

EXISTING WELL LOCATION

PROPOSED WELL LOCATION

EXISTING CONTOURS (2' INTERVAL)

PROPOSED CONTOURS (2' INTERVAL)

EPL

EXISTING PIPELINE

PROPOSED SOUND MITIGATION

EXISTING FENCE

PROPOSED FENCE

DIVERSION DITCH AND/OR BERM

0 50' 100'

1" = 100'

2' CONTOURS

SCALE: 1"=100'

DATE: 2/2/23

SHEET NO: 1

1 OF 1

K:\ANADARKO\2017\2017\_197\_CERVL\_BRANCH\_T4N\_R63W\DWG\04\_5 MINUTES TO MIDNIGHT\04\_5 MINUTES TO MIDNIGHT.dwg, 11/17/2023 5:12:30 PM, sandberg

## **APPENDIX C**

### **SUMMARY OF SITE-SPECIFIC EROSION & SEDIMENT CONTROLS / BMPS**

## **SUMMARY OF SITE-SPECIFIC STORMWATER, EROSION & SEDIMENT CONTROLS / BMPs FOR CONSTRUCTION, DRILLING & COMPLETIONS PHASES**

Stormwater will be managed during construction by a combination of site-specific erosion and sediment control measures including: delineation of limits of construction to establish a work space; a vehicle tracking control placed along the eastern portions of the access road to the well pad and the facility pad to mitigate off-site sediment migration from vehicle traffic onto Highway 34, approximately 3.85 miles north of the location; a temporary diversion ditch & berm around the entire location to manage run-on and run-off; temporary spillways and outlet structures placed in the eastern, northern, southern and southwestern portions of the disturbance area ditch which will allow for settling of sediment from stormwater prior to discharge; ~3 temporary culvert with inlet and outlet protection will be installed in the primary well pad access point to direct stormwater to designated discharge structures; seed & mulch to stabilize areas no longer needed for construction, as well as for topsoil stockpiles which will remain in place until interim and final reclamation. During active construction, daily inspections will be completed by on-site personnel. A contractor will conduct stormwater compliance inspections every 14-days and/or following a rain event which produces 0.25" of precipitation or equivalent snow melt which causes surface erosion. Inspections will review all control measures / BMPs implemented, their status, and whether repair or replacement is needed. Maintenance and repair will be completed as soon as practicable, immediately in most cases.