




Black Hills Plateau Production, LLC
A Black Hills Corporation Enterprise

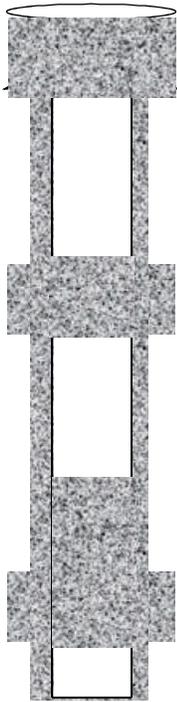

PBTD 2797'
TD 2850'

General Well Info		Diagram Date:	Updated
Well Name:	Debeque Canyon 1-18		5/26/16 nl
Srf Location:		Field:	Shire Gulch
Lease # ^(BLM) :	COC012643A	County:	Mesa
API #:	05-077-08719	State:	Colorado
GL Elev:		Spud Date:	
KB Elev:		TD Date:	
		Compl Date:	
Formation Tops			
Zone	Depth	Zone	Depth
CAMEO	1980'	DAKOTA	
ROLLINS	2210'	CEDAR MTN	
COZZETTE	2440'	MORRISON	
CORCORAN	2633'		
MANCOS			

Surface casing :

10 jts 8-5/8" 24 # J-55, LT&C, 418'

Production casing :

5 1/2" 64 jts 15.5# J55 LT&C set @ 2850

Production tubing :

2 3/8", 4.7# J-55, EOT 2658'

CRCN (6/13/01) 2637'-46', 2649'-51', 2656'-59', 2666'-2671', 2674'-2678', 2684'-2685'

PROPOSED P&A PROCEDURE

TIH w/CR. Set @ 2380, sting in and pump 150 sks or until we catch pressure. Sting out and dump 2 sks of cement on top.

RIH w/WL and Shoot 4 circulating holes @ 1320, POH.

RIH w/CR set @1280', sting in and pump 45 sks of cement. Sting out and dump 2 sks of cement on top.

RIH/WL and Shoot 4 circulating holes @ 468'. POH

TIH and Mix 350 sks of cement and bring to surface with all valves open.

Dig out wellhead, cut off 8 5/8" Casing and 5 1/2" casing 6' below ground level. Install dry hole marker plate as per COGCC

Reclaim location and file necessary sundries