

EXTRACTION OIL & GAS

Weld County

Sec 7-T4N-R68W

BERTHOUD FARMS 8E-10-11N

ORIGINAL WELLBORE

Plan: PROPOSAL 1

Standard Planning Report

22 May, 2017



WELL DETAILS: BERTHOUD FARMS 8E-10-11N

+N/-S	+E/-W	Northing	Easting	5035.0	Latitude	Longitude	Slot
0.0	0.0	1361363.37	3128119.82	40° 19' 27.955 N	105° 2' 25.771 W		

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	1200.0	0.00	0.00	1200.0	0.0	0.0	0.00	0.00	0.0	
3	2968.2	44.21	335.54	2798.0	590.7	-268.7	2.50	335.54	-56.7	
4	4155.5	44.21	335.54	3649.0	1344.3	-611.4	0.00	0.00	-129.1	
5	5923.8	0.00	0.00	5247.0	1935.0	-880.1	2.50	180.00	-185.8	
6	6023.8	0.00	0.00	5347.0	1935.0	-880.1	0.00	0.00	-185.8	
7	6923.8	90.00	88.91	5920.0	1945.9	-307.2	10.00	88.91	358.0	
8	8684.4	90.00	88.91	5920.0	1979.2	1453.1	0.00	0.00	2029.1	BF 11 - LP
9	13094.8	90.00	88.74	5920.0	2069.5	5862.6	0.00	-90.00	6217.1	BF 11 - PBHL

ANNOTATIONS

MD	Inc	Azi	TVD	+N/-S	+E/-W	VSect	Departure	Annotation
1200.0	0.00	0.00	1200.0	0.0	0.0	0.0	0.0	BUILD 2.50°/100'
2968.2	44.21	335.54	2798.0	590.7	-268.7	-56.7	649.0	HOLD 44.21° INC
4155.5	44.21	335.54	3649.0	1344.3	-611.4	-129.1	1476.8	DROP 2.50°/100'
5923.8	0.00	0.00	5247.0	1935.0	-880.1	-185.8	2125.7	HOLD VERTICAL
6023.8	0.00	0.00	5347.0	1935.0	-880.1	-185.8	2125.7	KOP, BUILD 10°/100'
6923.8	90.00	88.91	5920.0	1945.9	-307.2	358.0	2698.7	LP @ 90° INC
8684.4	90.00	88.91	5920.0	1979.2	1453.1	2029.1	4459.4	HOLD
13094.8	90.00	88.74	5920.0	2069.5	5862.6	6217.1	8869.7	TD at 13094.8' MD

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Shape
BF 11 - LP	5920.0	1979.2	1453.1	1363350.12	3129562.64	40° 19' 47.514 N	105° 2' 7.008 W	Point
- plan hits target center								
BF 11 - PBHL	5920.0	2069.5	5862.6	1363463.24	3133971.57	40° 19' 48.400 N	105° 1' 10.070 W	Point
- plan hits target center								

FORMATION TOP DETAILS

TVDPath	MDPath	Formation
2410.0	2474.7	PARKMAN
3010.0	3264.0	SUSSEX
3450.0	3877.9	SHANNON
5920.0	6923.8	NIOBRARA

PROJECT DETAILS: Weld County


Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: Colorado Northern Zone

System Datum: Mean Sea Level

SHL:
1548' FSL, 1002' FEL
Sec 7-T4N-R68W

LP:
1810' FNL, 460' FWL
Sec 8-T4N-R68W

BHL:
1800' FNL, 460' FEL
Sec 8-T4N-R68W

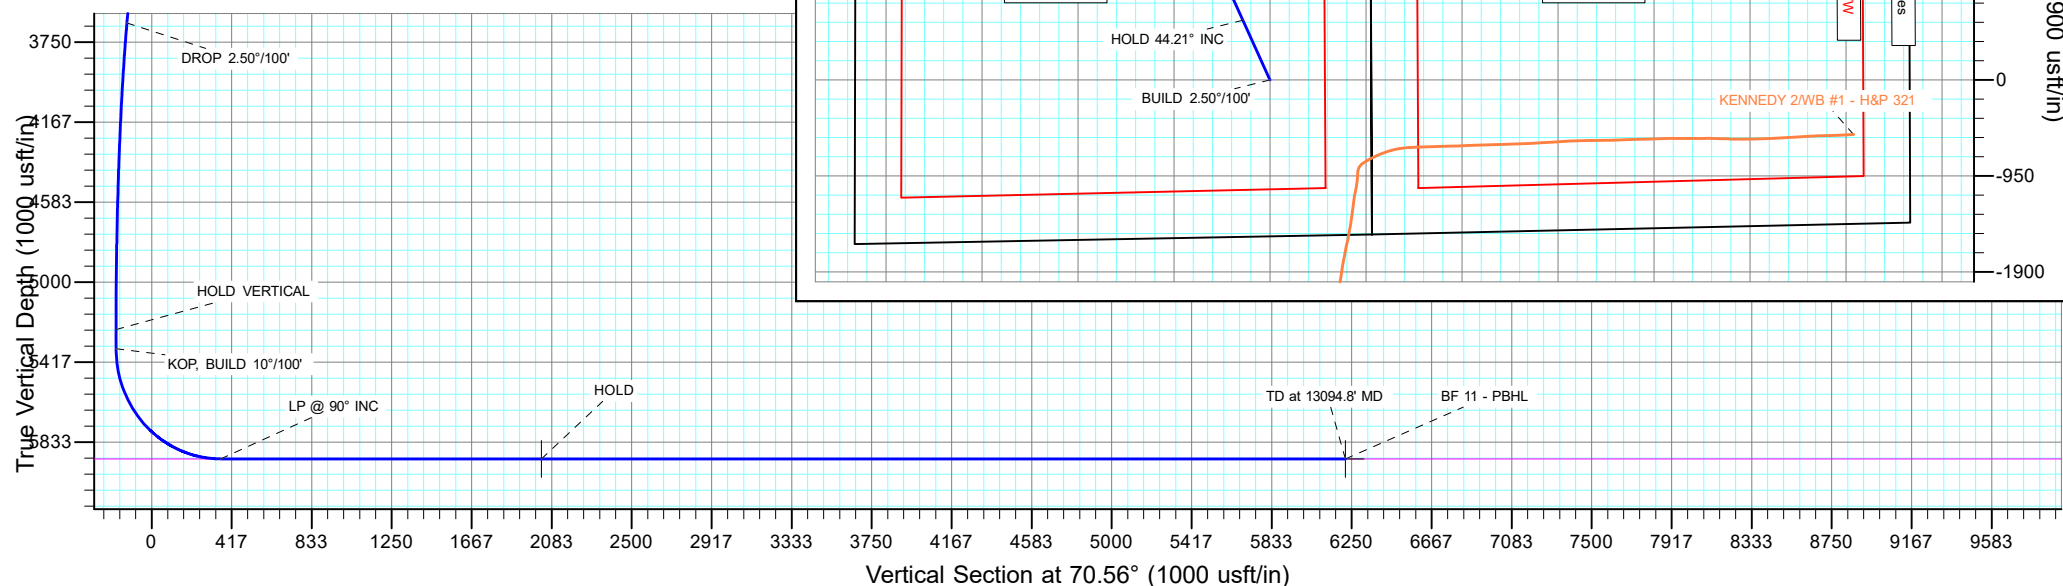

Planning Report

Database:	EDT_32Bit_ODBC	Local Co-ordinate Reference:	Well BERTHOUD FARMS 8E-10-11N
Company:	EXTRACTION OIL & GAS	TVD Reference:	KB 24' @ 5059.0usft
Project:	Weld County	MD Reference:	KB 24' @ 5059.0usft
Site:	Sec 7-T4N-R68W	North Reference:	True
Well:	BERTHOUD FARMS 8E-10-11N	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL 1		

Project	Weld County		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Northern Zone		

Site		Sec 7-T4N-R68W			
Site Position:		Northing:	1,359,838.99 usft	Latitude:	40° 19' 12.839 N
From:	Lat/Long	Easting:	3,129,136.57 usft	Longitude:	105° 2' 12.746 W
Position Uncertainty:	0.0 usft	Slot Radius:	13.200 in	Grid Convergence:	0.30 °

Well	BERTHOUD FARMS 8E-10-11N					
Well Position	+N/-S	1,529.7 usft	Northing:	1,361,363.37 usft	Latitude:	40° 19' 27.955 N
	+E/-W	-1,008.8 usft	Easting:	3,128,119.82 usft	Longitude:	105° 2' 25.771 W
Position Uncertainty	0.0 usft		Wellhead Elevation:		Ground Level:	5,035.0 usft

Wellbore	ORIGINAL WELLBORE				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	4/4/2017	8.37	66.76	52,345.10347720

Design	PROPOSAL 1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	70.56

Plan Survey Tool Program	Date	5/22/2017		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.0	13,094.8	PROPOSAL 1 (ORIGINAL WELL	MWD OWSG
			OWSG MWD - Standard	

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,968.2	44.21	335.54	2,798.0	590.7	-268.7	2.50	2.50	0.00	335.54	
4,155.5	44.21	335.54	3,649.0	1,344.3	-611.4	0.00	0.00	0.00	0.00	
5,923.8	0.00	0.00	5,247.0	1,935.0	-880.1	2.50	-2.50	0.00	180.00	
6,023.8	0.00	0.00	5,347.0	1,935.0	-880.1	0.00	0.00	0.00	0.00	
6,923.8	90.00	88.91	5,920.0	1,945.9	-307.2	10.00	10.00	0.00	88.91	
8,684.4	90.00	88.91	5,920.0	1,979.2	1,453.1	0.00	0.00	0.00	0.00	BF 11 - LP
13,094.8	90.00	88.74	5,920.0	2,069.5	5,862.6	0.00	0.00	0.00	-90.00	BF 11 - PBHL

Planning Report

Database:	EDT_32Bit_ODBC	Local Co-ordinate Reference:	Well BERTHOUD FARMS 8E-10-11N
Company:	EXTRACTION OIL & GAS	TVD Reference:	KB 24' @ 5059.0usft
Project:	Weld County	MD Reference:	KB 24' @ 5059.0usft
Site:	Sec 7-T4N-R68W	North Reference:	True
Well:	BERTHOUD FARMS 8E-10-11N	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
BUILD 2.50°/100'									
1,300.0	2.50	335.54	1,300.0	2.0	-0.9	-0.2	2.50	2.50	0.00
1,400.0	5.00	335.54	1,399.7	7.9	-3.6	-0.8	2.50	2.50	0.00
1,500.0	7.50	335.54	1,499.1	17.8	-8.1	-1.7	2.50	2.50	0.00
1,600.0	10.00	335.54	1,598.0	31.7	-14.4	-3.0	2.50	2.50	0.00
1,700.0	12.50	335.54	1,696.0	49.5	-22.5	-4.7	2.50	2.50	0.00
1,800.0	15.00	335.54	1,793.2	71.1	-32.3	-6.8	2.50	2.50	0.00
1,900.0	17.50	335.54	1,889.2	96.6	-43.9	-9.3	2.50	2.50	0.00
2,000.0	20.00	335.54	1,983.9	125.8	-57.2	-12.1	2.50	2.50	0.00
2,100.0	22.50	335.54	2,077.0	158.8	-72.2	-15.2	2.50	2.50	0.00
2,200.0	25.00	335.54	2,168.6	195.5	-88.9	-18.8	2.50	2.50	0.00
2,300.0	27.50	335.54	2,258.2	235.7	-107.2	-22.6	2.50	2.50	0.00
2,400.0	30.00	335.54	2,345.9	279.5	-127.1	-26.8	2.50	2.50	0.00
2,474.7	31.87	335.54	2,410.0	314.5	-143.0	-30.2	2.50	2.50	0.00
PARKMAN									
2,500.0	32.50	335.54	2,431.4	326.7	-148.6	-31.4	2.50	2.50	0.00
2,600.0	35.00	335.54	2,514.5	377.3	-171.6	-36.2	2.50	2.50	0.00
2,700.0	37.50	335.54	2,595.2	431.1	-196.1	-41.4	2.50	2.50	0.00
2,800.0	40.00	335.54	2,673.2	488.1	-222.0	-46.9	2.50	2.50	0.00
2,900.0	42.50	335.54	2,748.3	548.1	-249.3	-52.6	2.50	2.50	0.00
2,968.2	44.21	335.54	2,798.0	590.7	-268.7	-56.7	2.50	2.50	0.00
HOLD 44.21° INC									
3,000.0	44.21	335.54	2,820.7	610.9	-277.9	-58.7	0.00	0.00	0.00
3,100.0	44.21	335.54	2,892.4	674.4	-306.7	-64.8	0.00	0.00	0.00
3,200.0	44.21	335.54	2,964.1	737.8	-335.6	-70.8	0.00	0.00	0.00
3,264.0	44.21	335.54	3,010.0	778.5	-354.1	-74.7	0.00	0.00	0.00
SUSSEX									
3,300.0	44.21	335.54	3,035.8	801.3	-364.5	-76.9	0.00	0.00	0.00
3,400.0	44.21	335.54	3,107.5	864.8	-393.3	-83.0	0.00	0.00	0.00
3,500.0	44.21	335.54	3,179.1	928.2	-422.2	-89.1	0.00	0.00	0.00
3,600.0	44.21	335.54	3,250.8	991.7	-451.1	-95.2	0.00	0.00	0.00
3,700.0	44.21	335.54	3,322.5	1,055.2	-479.9	-101.3	0.00	0.00	0.00
3,800.0	44.21	335.54	3,394.2	1,118.6	-508.8	-107.4	0.00	0.00	0.00
3,877.9	44.21	335.54	3,450.0	1,168.0	-531.3	-112.2	0.00	0.00	0.00
SHANNON									
3,900.0	44.21	335.54	3,465.9	1,182.1	-537.7	-113.5	0.00	0.00	0.00
4,000.0	44.21	335.54	3,537.6	1,245.6	-566.5	-119.6	0.00	0.00	0.00
4,100.0	44.21	335.54	3,609.2	1,309.0	-595.4	-125.7	0.00	0.00	0.00
4,155.5	44.21	335.54	3,649.0	1,344.3	-611.4	-129.1	0.00	0.00	0.00
DROP 2.50°/100'									

Planning Report

Database:	EDT_32Bit_ODBC	Local Co-ordinate Reference:	Well BERTHOUD FARMS 8E-10-11N
Company:	EXTRACTION OIL & GAS	TVD Reference:	KB 24' @ 5059.0usft
Project:	Weld County	MD Reference:	KB 24' @ 5059.0usft
Site:	Sec 7-T4N-R68W	North Reference:	True
Well:	BERTHOUD FARMS 8E-10-11N	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,200.0	43.09	335.54	3,681.2	1,372.2	-624.1	-131.8	2.50	-2.50	0.00
4,300.0	40.59	335.54	3,755.7	1,432.9	-651.7	-137.6	2.50	-2.50	0.00
4,400.0	38.09	335.54	3,833.0	1,490.6	-678.0	-143.1	2.50	-2.50	0.00
4,500.0	35.59	335.54	3,913.1	1,545.2	-702.8	-148.4	2.50	-2.50	0.00
4,600.0	33.09	335.54	3,995.6	1,596.6	-726.2	-153.3	2.50	-2.50	0.00
4,700.0	30.59	335.54	4,080.6	1,644.6	-748.0	-157.9	2.50	-2.50	0.00
4,800.0	28.09	335.54	4,167.7	1,689.2	-768.3	-162.2	2.50	-2.50	0.00
4,900.0	25.59	335.54	4,256.9	1,730.3	-787.0	-166.1	2.50	-2.50	0.00
5,000.0	23.09	335.54	4,348.0	1,767.8	-804.1	-169.7	2.50	-2.50	0.00
5,100.0	20.59	335.54	4,440.9	1,801.7	-819.5	-173.0	2.50	-2.50	0.00
5,200.0	18.09	335.54	4,535.2	1,831.8	-833.2	-175.9	2.50	-2.50	0.00
5,300.0	15.59	335.54	4,630.9	1,858.2	-845.2	-178.4	2.50	-2.50	0.00
5,400.0	13.09	335.54	4,727.8	1,880.8	-855.4	-180.6	2.50	-2.50	0.00
5,500.0	10.59	335.54	4,825.6	1,899.4	-863.9	-182.4	2.50	-2.50	0.00
5,600.0	8.09	335.54	4,924.3	1,914.2	-870.6	-183.8	2.50	-2.50	0.00
5,700.0	5.59	335.54	5,023.6	1,925.1	-875.6	-184.8	2.50	-2.50	0.00
5,800.0	3.09	335.54	5,123.3	1,932.0	-878.7	-185.5	2.50	-2.50	0.00
5,900.0	0.59	335.54	5,223.2	1,934.9	-880.0	-185.8	2.50	-2.50	0.00
5,923.8	0.00	0.00	5,247.0	1,935.0	-880.1	-185.8	2.50	-2.50	102.92
HOLD VERTICAL									
6,000.0	0.00	0.00	5,323.2	1,935.0	-880.1	-185.8	0.00	0.00	0.00
6,023.8	0.00	0.00	5,347.0	1,935.0	-880.1	-185.8	0.00	0.00	0.00
KOP, BUILD 10°/100'									
6,050.0	2.62	88.91	5,373.2	1,935.0	-879.5	-185.2	10.00	10.00	0.00
6,100.0	7.62	88.91	5,423.0	1,935.1	-875.0	-181.0	10.00	10.00	0.00
6,150.0	12.62	88.91	5,472.2	1,935.3	-866.3	-172.7	10.00	10.00	0.00
6,200.0	17.62	88.91	5,520.5	1,935.5	-853.2	-160.3	10.00	10.00	0.00
6,250.0	22.62	88.91	5,567.4	1,935.8	-836.0	-144.0	10.00	10.00	0.00
6,300.0	27.62	88.91	5,612.7	1,936.2	-814.8	-123.8	10.00	10.00	0.00
6,350.0	32.62	88.91	5,655.9	1,936.7	-789.7	-100.0	10.00	10.00	0.00
6,400.0	37.62	88.91	5,696.8	1,937.3	-761.0	-72.7	10.00	10.00	0.00
6,450.0	42.62	88.91	5,735.0	1,937.9	-728.8	-42.1	10.00	10.00	0.00
6,500.0	47.62	88.91	5,770.3	1,938.5	-693.4	-8.5	10.00	10.00	0.00
6,550.0	52.62	88.91	5,802.3	1,939.3	-655.0	27.9	10.00	10.00	0.00
6,600.0	57.62	88.91	5,830.9	1,940.0	-614.0	66.8	10.00	10.00	0.00
6,650.0	62.62	88.91	5,855.8	1,940.9	-570.7	107.9	10.00	10.00	0.00
6,700.0	67.62	88.91	5,876.8	1,941.7	-525.3	151.0	10.00	10.00	0.00
6,750.0	72.62	88.91	5,893.8	1,942.6	-478.3	195.6	10.00	10.00	0.00
6,800.0	77.62	88.91	5,906.7	1,943.5	-430.0	241.4	10.00	10.00	0.00
6,850.0	82.62	88.91	5,915.3	1,944.5	-380.8	288.2	10.00	10.00	0.00
6,900.0	87.62	88.91	5,919.5	1,945.4	-331.0	335.4	10.00	10.00	0.00
6,923.8	90.00	88.91	5,920.0	1,945.9	-307.2	358.0	10.00	10.00	0.00
LP @ 90° INC - NIOBRARA									
7,000.0	90.00	88.91	5,920.0	1,947.3	-231.0	430.3	0.00	0.00	0.00
7,100.0	90.00	88.91	5,920.0	1,949.2	-131.1	525.2	0.00	0.00	0.00
7,200.0	90.00	88.91	5,920.0	1,951.1	-31.1	620.2	0.00	0.00	0.00
7,300.0	90.00	88.91	5,920.0	1,953.0	68.9	715.1	0.00	0.00	0.00
7,400.0	90.00	88.91	5,920.0	1,954.9	168.9	810.0	0.00	0.00	0.00
7,500.0	90.00	88.91	5,920.0	1,956.8	268.9	904.9	0.00	0.00	0.00
7,600.0	90.00	88.91	5,920.0	1,958.7	368.8	999.8	0.00	0.00	0.00
7,700.0	90.00	88.91	5,920.0	1,960.6	468.8	1,094.7	0.00	0.00	0.00
7,800.0	90.00	88.91	5,920.0	1,962.5	568.8	1,189.6	0.00	0.00	0.00
7,900.0	90.00	88.91	5,920.0	1,964.4	668.8	1,284.5	0.00	0.00	0.00

Planning Report

Database:	EDT_32Bit_ODBC	Local Co-ordinate Reference:	Well BERTHOUD FARMS 8E-10-11N
Company:	EXTRACTION OIL & GAS	TVD Reference:	KB 24' @ 5059.0usft
Project:	Weld County	MD Reference:	KB 24' @ 5059.0usft
Site:	Sec 7-T4N-R68W	North Reference:	True
Well:	BERTHOUD FARMS 8E-10-11N	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
8,000.0	90.00	88.91	5,920.0	1,966.3	768.8	1,379.5	0.00	0.00	0.00
8,100.0	90.00	88.91	5,920.0	1,968.2	868.8	1,474.4	0.00	0.00	0.00
8,200.0	90.00	88.91	5,920.0	1,970.1	968.7	1,569.3	0.00	0.00	0.00
8,300.0	90.00	88.91	5,920.0	1,972.0	1,068.7	1,664.2	0.00	0.00	0.00
8,400.0	90.00	88.91	5,920.0	1,973.9	1,168.7	1,759.1	0.00	0.00	0.00
8,500.0	90.00	88.91	5,920.0	1,975.7	1,268.7	1,854.0	0.00	0.00	0.00
8,600.0	90.00	88.91	5,920.0	1,977.6	1,368.7	1,948.9	0.00	0.00	0.00
8,684.4	90.00	88.91	5,920.0	1,979.2	1,453.1	2,029.1	0.00	0.00	0.00
HOLD									
8,700.0	90.00	88.91	5,920.0	1,979.5	1,468.6	2,043.8	0.00	0.00	0.00
8,800.0	90.00	88.91	5,920.0	1,981.4	1,568.6	2,138.7	0.00	0.00	0.00
8,900.0	90.00	88.91	5,920.0	1,983.3	1,668.6	2,233.7	0.00	0.00	0.00
9,000.0	90.00	88.90	5,920.0	1,985.3	1,768.6	2,328.6	0.00	0.00	0.00
9,100.0	90.00	88.90	5,920.0	1,987.2	1,868.6	2,423.5	0.00	0.00	0.00
9,200.0	90.00	88.89	5,920.0	1,989.1	1,968.6	2,518.4	0.00	0.00	0.00
9,300.0	90.00	88.89	5,920.0	1,991.0	2,068.5	2,613.3	0.00	0.00	0.00
9,400.0	90.00	88.89	5,920.0	1,993.0	2,168.5	2,708.3	0.00	0.00	0.00
9,500.0	90.00	88.88	5,920.0	1,994.9	2,268.5	2,803.2	0.00	0.00	0.00
9,600.0	90.00	88.88	5,920.0	1,996.9	2,368.5	2,898.1	0.00	0.00	0.00
9,700.0	90.00	88.87	5,920.0	1,998.9	2,468.5	2,993.1	0.00	0.00	0.00
9,800.0	90.00	88.87	5,920.0	2,000.8	2,568.4	3,088.0	0.00	0.00	0.00
9,900.0	90.00	88.87	5,920.0	2,002.8	2,668.4	3,182.9	0.00	0.00	0.00
10,000.0	90.00	88.86	5,920.0	2,004.8	2,768.4	3,277.9	0.00	0.00	0.00
10,100.0	90.00	88.86	5,920.0	2,006.8	2,868.4	3,372.8	0.00	0.00	0.00
10,200.0	90.00	88.85	5,920.0	2,008.8	2,968.4	3,467.7	0.00	0.00	0.00
10,300.0	90.00	88.85	5,920.0	2,010.8	3,068.3	3,562.7	0.00	0.00	0.00
10,400.0	90.00	88.85	5,920.0	2,012.8	3,168.3	3,657.6	0.00	0.00	0.00
10,500.0	90.00	88.84	5,920.0	2,014.8	3,268.3	3,752.6	0.00	0.00	0.00
10,600.0	90.00	88.84	5,920.0	2,016.8	3,368.3	3,847.5	0.00	0.00	0.00
10,700.0	90.00	88.83	5,920.0	2,018.8	3,468.3	3,942.5	0.00	0.00	0.00
10,800.0	90.00	88.83	5,920.0	2,020.9	3,568.2	4,037.4	0.00	0.00	0.00
10,900.0	90.00	88.83	5,920.0	2,022.9	3,668.2	4,132.4	0.00	0.00	0.00
11,000.0	90.00	88.82	5,920.0	2,025.0	3,768.2	4,227.4	0.00	0.00	0.00
11,100.0	90.00	88.82	5,920.0	2,027.0	3,868.2	4,322.3	0.00	0.00	0.00
11,200.0	90.00	88.82	5,920.0	2,029.1	3,968.2	4,417.3	0.00	0.00	0.00
11,300.0	90.00	88.81	5,920.0	2,031.2	4,068.1	4,512.3	0.00	0.00	0.00
11,400.0	90.00	88.81	5,920.0	2,033.3	4,168.1	4,607.2	0.00	0.00	0.00
11,500.0	90.00	88.80	5,920.0	2,035.3	4,268.1	4,702.2	0.00	0.00	0.00
11,600.0	90.00	88.80	5,920.0	2,037.4	4,368.1	4,797.2	0.00	0.00	0.00
11,700.0	90.00	88.80	5,920.0	2,039.5	4,468.0	4,892.1	0.00	0.00	0.00
11,800.0	90.00	88.79	5,920.0	2,041.6	4,568.0	4,987.1	0.00	0.00	0.00
11,900.0	90.00	88.79	5,920.0	2,043.7	4,668.0	5,082.1	0.00	0.00	0.00
12,000.0	90.00	88.78	5,920.0	2,045.9	4,768.0	5,177.1	0.00	0.00	0.00
12,100.0	90.00	88.78	5,920.0	2,048.0	4,868.0	5,272.1	0.00	0.00	0.00
12,200.0	90.00	88.78	5,920.0	2,050.1	4,967.9	5,367.1	0.00	0.00	0.00
12,300.0	90.00	88.77	5,920.0	2,052.3	5,067.9	5,462.0	0.00	0.00	0.00
12,400.0	90.00	88.77	5,920.0	2,054.4	5,167.9	5,557.0	0.00	0.00	0.00
12,500.0	90.00	88.76	5,920.0	2,056.6	5,267.9	5,652.0	0.00	0.00	0.00
12,600.0	90.00	88.76	5,920.0	2,058.7	5,367.8	5,747.0	0.00	0.00	0.00
12,700.0	90.00	88.76	5,920.0	2,060.9	5,467.8	5,842.0	0.00	0.00	0.00
12,800.0	90.00	88.75	5,920.0	2,063.1	5,567.8	5,937.0	0.00	0.00	0.00
12,900.0	90.00	88.75	5,920.0	2,065.2	5,667.8	6,032.0	0.00	0.00	0.00
13,000.0	90.00	88.74	5,920.0	2,067.4	5,767.7	6,127.0	0.00	0.00	0.00
13,094.8	90.00	88.74	5,920.0	2,069.5	5,862.6	6,217.1	0.00	0.00	0.00

Planning Report

Database:	EDT_32Bit_ODBC	Local Co-ordinate Reference:	Well BERTHOUD FARMS 8E-10-11N
Company:	EXTRACTION OIL & GAS	TVD Reference:	KB 24' @ 5059.0usft
Project:	Weld County	MD Reference:	KB 24' @ 5059.0usft
Site:	Sec 7-T4N-R68W	North Reference:	True
Well:	BERTHOUD FARMS 8E-10-11N	Survey Calculation Method:	Minimum Curvature
Wellbore:	ORIGINAL WELLBORE		
Design:	PROPOSAL 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
TD at 13094.8' MD									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
BF 11 - PBHL	0.00	0.00	5,920.0	2,069.5	5,862.6	1,363,463.24	3,133,971.57	40° 19' 48.400 N	105° 1' 10.070 W
- plan hits target center									
- Point									
BF 11 - LP	0.00	0.00	5,920.0	1,979.2	1,453.1	1,363,350.12	3,129,562.64	40° 19' 47.514 N	105° 2' 7.008 W
- plan hits target center									
- Point									

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
2,474.7	2,410.0	PARKMAN				
3,264.0	3,010.0	SUSSEX				
3,877.9	3,450.0	SHANNON				
6,923.8	5,920.0	NIOBRARA				

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,200.0	1,200.0	0.0	0.0	BUILD 2.50°/100'
2,968.2	2,798.0	590.7	-268.7	HOLD 44.21° INC
4,155.5	3,649.0	1,344.3	-611.4	DROP 2.50°/100'
5,923.8	5,247.0	1,935.0	-880.1	HOLD VERTICAL
6,023.8	5,347.0	1,935.0	-880.1	KOP, BUILD 10°/100'
6,923.8	5,920.0	1,945.9	-307.2	LP @ 90° INC
8,684.4	5,920.0	1,979.2	1,453.1	HOLD
13,094.8	5,920.0	2,069.5	5,862.6	TD at 13094.8' MD