



Project: Mesa County, CO  
 Site: Gunderson 13-11 Pad  
 Well: Gunderson 0994-13-12E  
 Wellbore: Wellbore #1  
 Design: Design #1  
 Latitude: 39.273854  
 Longitude: -107.834901  
 Ground Level: 7272.0  
 well @ 7302.0usft (H&P #522)



#### SECTION DETAILS


MD	Inc	Azi	TVD	+N/-S	+E/-W	Diag	TFace	VSect	Annotation
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	KOP (Build 3" / 100')
350.0	0.00	0.00	350.0	0.0	0.0	0.00	0.00	0.0	EOB @ 31.58" Inc. / 70.55" Azm
1406.1	31.58	70.55	1353.1	94.8	268.4	3.00	70.55	284.8	Drop 3" / 100'
5467.1	31.58	70.55	4809.9	805.0	2279.6	0.00	0.00	2417.6	EOB @ Vertical
6523.2	0.00	0.00	5812.0	899.8	2548.0	3.00	180.00	2702.2	TD @ 5373.2' MD / 7862.0' TVD
8373.2	0.00	0.00	7862.0	899.8	2548.0	0.00	0.00	2702.2	

#### DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
PBHL - Gunderson 0994-13-12E	7862.0	899.8	2548.0	1533982.65	2341653.33	39.276324	-107.825900

#### WELL DETAILS: Gunderson 0994-13-12E

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.0	0.0	1533128.67	2339083.03	39.273854	-107.834901



#### REFERENCE INFORMATION



Co-ordinate (N/E) Reference: Well Gunderson 0994-13-12E, True North  
 Vertical (TVD) Reference: well @ 7302.0usft (H&P #522)  
 Section (VS) Reference: Slot - (0.0N, 0.0E)  
 Measured Depth Reference: well @ 7302.0usft (H&P #522)  
 Calculation Method: Minimum Curvature

#### PROJECT DETAILS: Mesa County, CO

Geodetic System: US State Plane 1983  
 Datum: North American Datum 1983  
 Ellipsoid: GRS 1980  
 Zone: Colorado Central Zone  
 System Datum: Mean Sea Level

#### FORMATION TOP DETAILS

TVDPath	MDPath	Formation
4412.0	5009.7	Ohio Creek
4812.0	5235.8	Williams Fork
5812.0	6823.2	TDG
7012.0	7723.2	Cameo
7372.0	8053.2	Base Cameo Coal
7412.0	8123.2	Rollins

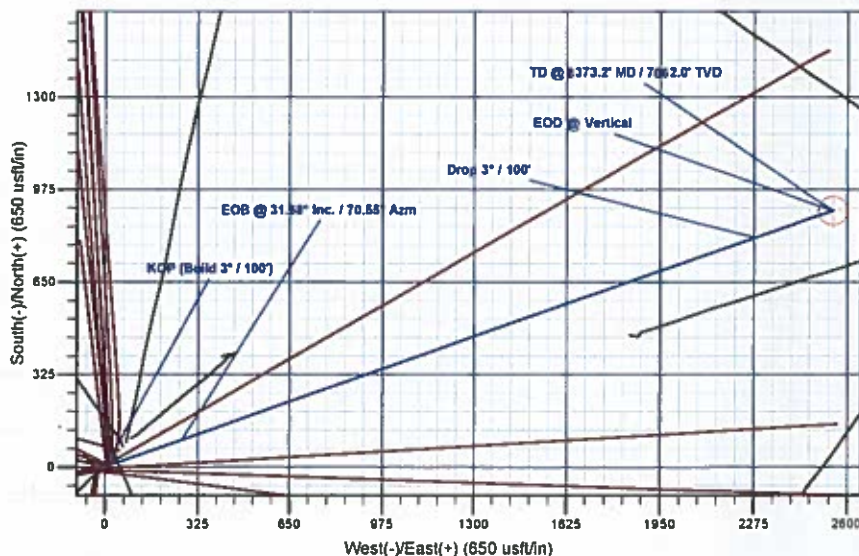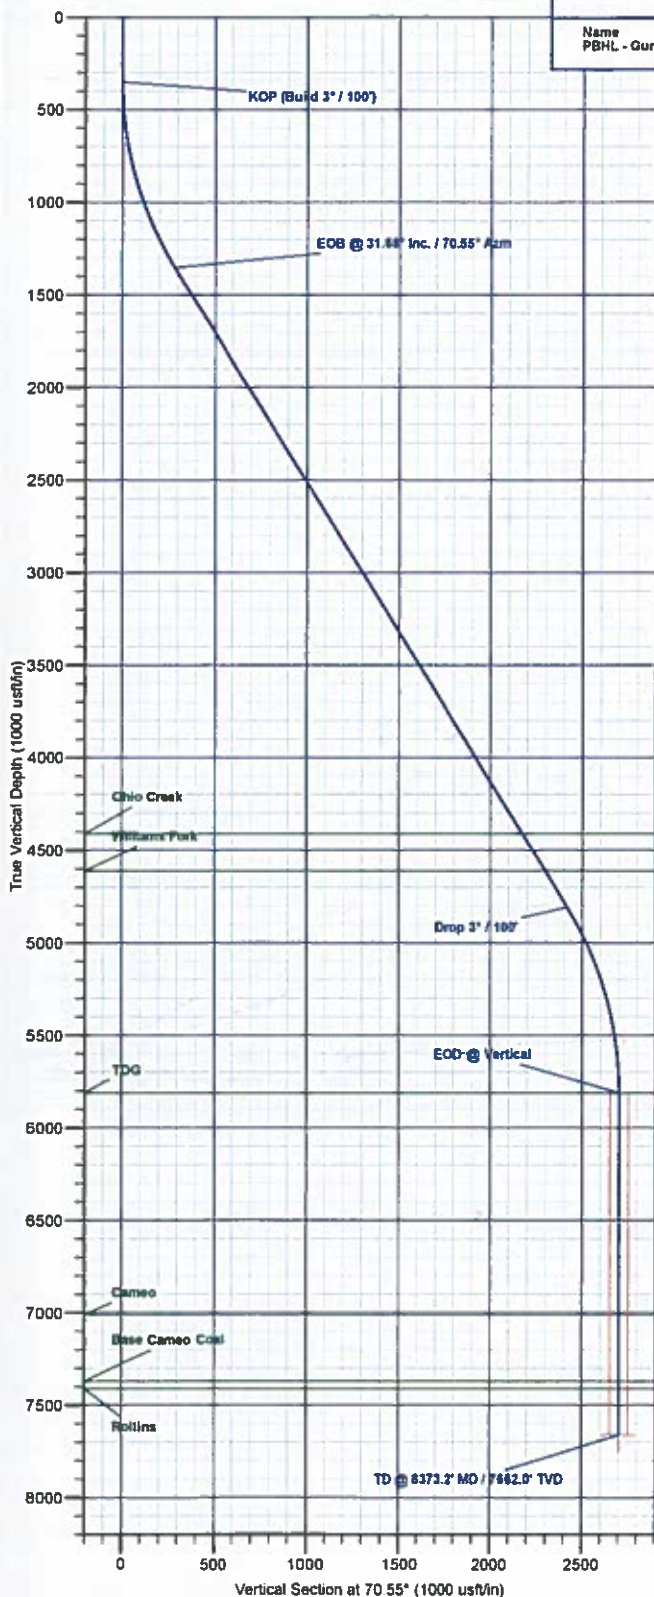

Plan: Design #1 (Gunderson 0994-13-12E/Wellbore #1)

Created By: Will Jircik Date: 14:31, October 10 2017



# **Laramie Energy, LLC**

**Mesa County, CO**

**Gunderson 13-11 Pad**

**Gunderson 0994-13-12E**

**Wellbore #1**

**Plan: Design #1**

## **QES Well Planning Report**

**10 October, 2017**





# Well Planning Report



<b>Database:</b>	EDM 5000.1 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Gunderson 0994-13-12E
<b>Company:</b>	Laramie Energy, LLC	<b>TVD Reference:</b>	well @ 7302.0usft (H&P #522)
<b>Project:</b>	Mesa County, CO	<b>MD Reference:</b>	well @ 7302.0usft (H&P #522)
<b>Site:</b>	Gunderson 13-11 Pad	<b>North Reference:</b>	True
<b>Well:</b>	Gunderson 0994-13-12E	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Design #1		

<b>Project</b>	Mesa County, CO		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	Colorado Central Zone		

<b>Site</b>	Gunderson 13-11 Pad			
<b>Site Position:</b>		<b>Northing:</b>	1,533,162.26 usft	<b>Latitude:</b> 39.273948
<b>From:</b>	Lat/Long	<b>Easting:</b>	2,339,102.68 usft	<b>Longitude:</b> -107.834835
<b>Position Uncertainty:</b>	0.0 usft	<b>Slot Radius:</b>	13-3/16"	<b>Grid Convergence:</b> -1.47°

<b>Well</b>	Gunderson 0994-13-12E			
<b>Well Position</b>	<b>+N/-S</b>	-34.1 usft	<b>Northing:</b>	1,533,128.67 usft
	<b>+E/-W</b>	-18.8 usft	<b>Easting:</b>	2,339,083.04 usft
<b>Position Uncertainty</b>	0.0 usft	<b>Wellhead Elevation:</b>		<b>Ground Level:</b> 7,272.0 usft

<b>Wellbore</b>	Wellbore #1				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2015	10/5/2017	9.57	65.43	51,385.82659546

<b>Design</b>	Design #1			
<b>Audit Notes:</b>				
<b>Version:</b>	<b>Phase:</b>	PLAN	<b>Tie On Depth:</b>	0.0
<b>Vertical Section:</b>	<b>Depth From (TVD) (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Direction (°)</b>
	0.0	0.0	0.0	70.55

<b>Plan Sections</b>										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
350.0	0.00	0.00	350.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,406.1	31.68	70.55	1,353.1	84.8	268.4	3.00	3.00	0.00	70.55	
5,467.1	31.68	70.55	4,808.9	805.0	2,279.6	0.00	0.00	0.00	0.00	
6,523.2	0.00	0.00	5,812.0	899.8	2,548.0	3.00	-3.00	0.00	180.00	
8,373.2	0.00	0.00	7,662.0	899.8	2,548.0	0.00	0.00	0.00	0.00	PBHL - Gunderson 05





# Well Planning Report



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Gunderson 0994-13-12E
Company:	Laramie Energy, LLC	TVD Reference:	well @ 7302 0usft (H&P #522)
Project:	Mesa County, CO	MD Reference:	well @ 7302 0usft (H&P #522)
Site:	Gunderson 13-11 Pad	North Reference:	True
Well:	Gunderson 0994-13-12E	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

## Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
<b>KOP (Build 3° / 100')</b>									
350.0	0.00	0.00	350.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	1.50	70.55	400.0	0.2	0.6	0.7	3.00	3.00	0.00
500.0	4.50	70.55	499.8	2.0	5.6	5.9	3.00	3.00	0.00
600.0	7.50	70.55	599.3	5.4	15.4	16.3	3.00	3.00	0.00
700.0	10.50	70.55	698.0	10.6	30.2	32.0	3.00	3.00	0.00
800.0	13.50	70.55	795.8	17.6	49.8	52.8	3.00	3.00	0.00
900.0	16.50	70.55	892.4	26.2	74.2	78.6	3.00	3.00	0.00
1,000.0	19.50	70.55	987.5	36.5	103.3	109.5	3.00	3.00	0.00
1,100.0	22.50	70.55	1,080.9	48.4	137.1	145.4	3.00	3.00	0.00
1,200.0	25.50	70.55	1,172.2	61.9	175.4	186.0	3.00	3.00	0.00
1,300.0	28.50	70.55	1,261.3	77.1	218.2	231.4	3.00	3.00	0.00
1,400.0	31.50	70.55	1,347.9	93.7	265.4	281.4	3.00	3.00	0.00
<b>EOB @ 31.68° Inc. / 70.55° Azm</b>									
1,406.1	31.68	70.55	1,353.1	94.8	268.4	284.6	3.00	3.00	0.00
1,500.0	31.68	70.55	1,433.0	111.2	314.9	334.0	0.00	0.00	0.00
<b>8 5/8"</b>									
1,530.0	31.68	70.55	1,458.5	116.4	329.8	349.7	0.00	0.00	0.00
1,600.0	31.68	70.55	1,518.1	128.7	364.4	386.5	0.00	0.00	0.00
1,700.0	31.68	70.55	1,603.2	146.2	413.9	439.0	0.00	0.00	0.00
1,800.0	31.68	70.55	1,688.3	163.7	463.5	491.5	0.00	0.00	0.00
1,900.0	31.68	70.55	1,773.4	181.1	513.0	544.0	0.00	0.00	0.00
2,000.0	31.68	70.55	1,858.5	198.6	562.5	596.6	0.00	0.00	0.00
2,100.0	31.68	70.55	1,943.6	216.1	612.0	649.1	0.00	0.00	0.00
2,200.0	31.68	70.55	2,028.7	233.6	661.6	701.6	0.00	0.00	0.00
2,300.0	31.68	70.55	2,113.8	251.1	711.1	754.1	0.00	0.00	0.00
2,400.0	31.68	70.55	2,198.9	268.6	760.6	806.6	0.00	0.00	0.00
2,500.0	31.68	70.55	2,284.0	286.1	810.1	859.2	0.00	0.00	0.00
2,600.0	31.68	70.55	2,369.1	303.6	859.7	911.7	0.00	0.00	0.00
2,700.0	31.68	70.55	2,454.2	321.1	909.2	964.2	0.00	0.00	0.00
2,800.0	31.68	70.55	2,539.3	338.5	958.7	1,016.7	0.00	0.00	0.00
2,900.0	31.68	70.55	2,624.4	356.0	1,008.2	1,069.3	0.00	0.00	0.00
3,000.0	31.68	70.55	2,709.4	373.5	1,057.8	1,121.8	0.00	0.00	0.00
3,100.0	31.68	70.55	2,794.5	391.0	1,107.3	1,174.3	0.00	0.00	0.00
3,200.0	31.68	70.55	2,879.6	408.5	1,156.8	1,226.8	0.00	0.00	0.00
3,300.0	31.68	70.55	2,964.7	426.0	1,206.3	1,279.3	0.00	0.00	0.00
3,400.0	31.68	70.55	3,049.8	443.5	1,255.9	1,331.9	0.00	0.00	0.00
3,500.0	31.68	70.55	3,134.9	461.0	1,305.4	1,384.4	0.00	0.00	0.00
3,600.0	31.68	70.55	3,220.0	478.4	1,354.9	1,436.9	0.00	0.00	0.00
3,700.0	31.68	70.55	3,305.1	495.9	1,404.4	1,489.4	0.00	0.00	0.00
3,800.0	31.68	70.55	3,390.2	513.4	1,454.0	1,542.0	0.00	0.00	0.00
3,900.0	31.68	70.55	3,475.3	530.9	1,503.5	1,594.5	0.00	0.00	0.00
4,000.0	31.68	70.55	3,560.4	548.4	1,553.0	1,647.0	0.00	0.00	0.00
4,100.0	31.68	70.55	3,645.5	565.9	1,602.5	1,699.5	0.00	0.00	0.00
4,200.0	31.68	70.55	3,730.6	583.4	1,652.1	1,752.0	0.00	0.00	0.00
4,300.0	31.68	70.55	3,815.7	600.9	1,701.6	1,804.6	0.00	0.00	0.00
4,400.0	31.68	70.55	3,900.8	618.4	1,751.1	1,857.1	0.00	0.00	0.00
4,500.0	31.68	70.55	3,985.9	635.8	1,800.6	1,909.6	0.00	0.00	0.00
4,600.0	31.68	70.55	4,071.0	653.3	1,850.2	1,962.1	0.00	0.00	0.00



# Well Planning Report



<b>Database:</b>	EDM 5000.1 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Gunderson 0994-13-12E
<b>Company:</b>	Laramie Energy, LLC	<b>TVD Reference:</b>	well @ 7302.0usft (H&P #522)
<b>Project:</b>	Mesa County, CO	<b>MD Reference:</b>	well @ 7302.0usft (H&P #522)
<b>Site:</b>	Gunderson 13-11 Pad	<b>North Reference:</b>	True
<b>Well:</b>	Gunderson 0994-13-12E	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Design #1		

## Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Buid Rate (°/100usft)	Turn Rate (°/100usft)
4,700.0	31.68	70.55	4,156.1	670.8	1,899.7	2,014.7	0.00	0.00	0.00
4,800.0	31.68	70.55	4,241.2	688.3	1,949.2	2,067.2	0.00	0.00	0.00
4,900.0	31.68	70.55	4,326.3	705.8	1,998.7	2,119.7	0.00	0.00	0.00
5,000.0	31.68	70.55	4,411.4	723.3	2,048.3	2,172.2	0.00	0.00	0.00
<b>Ohio Creek</b>									
5,000.7	31.68	70.55	4,412.0	723.4	2,048.6	2,172.6	0.00	0.00	0.00
5,100.0	31.68	70.55	4,496.5	740.8	2,097.8	2,224.7	0.00	0.00	0.00
5,200.0	31.68	70.55	4,581.6	758.3	2,147.3	2,277.3	0.00	0.00	0.00
<b>Williams Fork</b>									
5,235.8	31.68	70.55	4,612.0	764.5	2,165.0	2,296.0	0.00	0.00	0.00
5,300.0	31.68	70.55	4,666.7	775.8	2,196.8	2,329.8	0.00	0.00	0.00
5,400.0	31.68	70.55	4,751.8	793.2	2,246.4	2,382.3	0.00	0.00	0.00
<b>Drop 3° / 100'</b>									
5,467.1	31.68	70.55	4,808.9	805.0	2,279.6	2,417.6	0.00	0.00	0.00
5,500.0	30.70	70.55	4,837.0	810.6	2,295.7	2,434.6	3.00	-3.00	0.00
5,600.0	27.70	70.55	4,924.3	826.9	2,341.7	2,483.4	3.00	-3.00	0.00
5,700.0	24.70	70.55	5,014.0	841.6	2,383.3	2,527.5	3.00	-3.00	0.00
5,800.0	21.70	70.55	5,105.9	854.7	2,420.4	2,566.9	3.00	-3.00	0.00
5,900.0	18.70	70.55	5,199.8	866.2	2,453.0	2,601.4	3.00	-3.00	0.00
6,000.0	15.70	70.55	5,295.3	876.0	2,480.8	2,631.0	3.00	-3.00	0.00
6,100.0	12.70	70.55	5,392.2	884.2	2,504.0	2,655.5	3.00	-3.00	0.00
6,200.0	9.70	70.55	5,490.3	890.7	2,522.3	2,674.9	3.00	-3.00	0.00
6,300.0	6.70	70.55	5,589.3	895.4	2,535.7	2,689.2	3.00	-3.00	0.00
6,400.0	3.70	70.55	5,688.8	898.4	2,544.3	2,698.2	3.00	-3.00	0.00
6,500.0	0.70	70.55	5,788.8	899.7	2,547.9	2,702.1	3.00	-3.00	0.00
<b>EOD @ Vertical - TOG</b>									
6,523.2	0.00	0.00	5,812.0	899.8	2,548.0	2,702.2	3.00	-3.00	0.00
6,600.0	0.00	0.00	5,888.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
6,700.0	0.00	0.00	5,988.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
6,800.0	0.00	0.00	6,088.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
6,900.0	0.00	0.00	6,188.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
7,000.0	0.00	0.00	6,288.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
7,100.0	0.00	0.00	6,388.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
7,200.0	0.00	0.00	6,488.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
7,300.0	0.00	0.00	6,588.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
7,400.0	0.00	0.00	6,688.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
7,500.0	0.00	0.00	6,788.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
7,600.0	0.00	0.00	6,888.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
7,700.0	0.00	0.00	6,988.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
<b>Cameo</b>									
7,723.2	0.00	0.00	7,012.0	899.8	2,548.0	2,702.2	0.00	0.00	0.00
7,800.0	0.00	0.00	7,088.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
7,900.0	0.00	0.00	7,188.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
8,000.0	0.00	0.00	7,288.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
<b>Base Cameo Coal</b>									
8,083.2	0.00	0.00	7,372.0	899.8	2,548.0	2,702.2	0.00	0.00	0.00
8,100.0	0.00	0.00	7,388.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
<b>Rollins</b>									
8,123.2	0.00	0.00	7,412.0	899.8	2,548.0	2,702.2	0.00	0.00	0.00
8,200.0	0.00	0.00	7,488.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
8,300.0	0.00	0.00	7,588.8	899.8	2,548.0	2,702.2	0.00	0.00	0.00
<b>TD @ 8373.2' MD / 7662.0' TVD</b>									
8,373.2	0.00	0.00	7,662.0	899.8	2,548.0	2,702.2	0.00	0.00	0.00



# Well Planning Report



<b>Database:</b>	EDM 5000.1 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Gunderson 0994-13-12E
<b>Company:</b>	Laramie Energy, LLC	<b>TVD Reference:</b>	well @ 7302.0usft (H&P #522)
<b>Project:</b>	Mesa County, CO	<b>MD Reference:</b>	well @ 7302.0usft (H&P #522)
<b>Site:</b>	Gunderson 13-11 Pad	<b>North Reference:</b>	True
<b>Well:</b>	Gunderson 0994-13-12E	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Design #1		

## Design Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
PBHL - Gunderson 0994 - plan hits target center - Circle (radius 50.0)	0.00	0.00	7,662.0	899.8	2,548.0	1,533,982.65	2,341,653.33	39.276324	-107.825900

## Casing Points

Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")
1,530.0	1,458.5	8 5/8"	8-5/8	11

## Formations

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
5,000.7	4,412.0	Ohio Creek			
5,235.8	4,612.0	Williams Fork			
6,523.2	5,812.0	TOG			
7,723.2	7,012.0	Cameo			
8,083.2	7,372.0	Base Cameo Coal			
8,123.2	7,412.0	Rollins			

## Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
350.0	350.0	0.0	0.0	KOP (Build 3° / 100')
1,406.1	1,353.1	94.8	268.4	EOB @ 31.68° Inc. / 70.55° Azm
5,467.1	4,808.9	805.0	2,279.6	Drop 3° / 100'
6,523.2	5,812.0	899.8	2,548.0	EOD @ Vertical
8,373.2	7,662.0	899.8	2,548.0	TD @ 8373.2' MD / 7662.0' TVD