


RED WILLOW PRODUCTION LLC

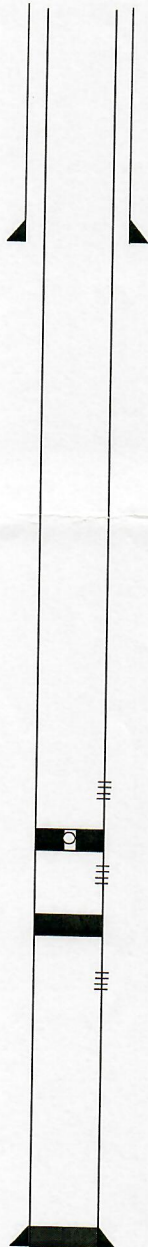

8-5/8" 24# J55 Surface @ 367'.
Cmt'd w/260 sxs

Niobrara: 6295' - 6316' 2 SPF, 42 holes
6367' - 6374' 2 SPF, 14 holes

Weatherford Composite Frac Baffle @ 6430'
Codell: 6476' - 6484' 2 SPF 32 holes

CIBP @ 6750' w/1 sack cement.

J-Sand 6933'-6940' 2 SPF w/Csg Guns (5/01)
6944'-6950' 2 SPF w/Csg Guns (5/01)
6966'-6988' 2 SPF w/Csg Guns (5/01)
6990'-6988' 2 SPF w/Csg Guns (5/01)
7006'-7013 2 SPF w/Csg Guns (5/01)
Frac'd w/500K Lbs 20/40

249Jts 4-1/2" 11.6# N80 LTC Casing - 7107'
Float Collar
1 Jt 4-1/2" 11.6# N80 LTC Casing 27'
Float Shoe @ 7130'
Cemented w/200 Sacks. CBL TOC = 5990'

WELL INFORMATION	
WELL NAME	DOW #21-28
DATE	7/30/2003
API #	05-123-20383
STATUS	Current
SURFACE LOCATION	T5N-R63W SECTION 28 660' FNL 1980' FWL
BOTTOM-HOLE LOCATION	T5N-R63W SECTION 28 660' FNL 1980' FWL
COUNTY, STATE	WELD COUNTY, COLORADO
GROUND ELEVATION	4544'
KB-GR MEASUREMENT	12'
COMMENTS	8/03 J-Sand Swabbed and found "sanded up"
	April 2004, Recompleted to the Codell Niobrara