


OIL AND GAS CONSERVATION COMMISSION
OF THE STATE OF COLORADO



00723817

PLUGGING RECORD

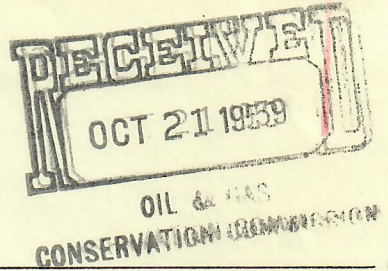

INSTRUCTIONS

Within thirty (30) days after the plugging of any well, the owner or operator thereof shall file this form in duplicate for wells on Patented or Federal lands, and in triplicate for wells on State lands, give a detailed account of the manner in which the abandonment or plugging work was carried out, including the nature and quantities of materials used in plugging and the location and extent (by depths) of the plugs of different materials; records of the amount, size and location (by depths) of casings and junk left in the well; and a detailed statement of the volume and weight of mud fluid used.

Operator Sunray Mid-Continent Oil Company Field Wildcat X
Lease Name L. C. Winder Land Company Well No. 1 County Routt
Location NW NW Section 21 Township 7N Range 88W Meridian 6th P.M.
(Quarter Quarter)
660 feet from N Section line and 660 feet from W Section Line
N or S E or W

TOTAL DEPTH 6300 Ft.

DATE OF PLUGGING October 8, 1959

Verbal 10/8/59

DETAILS OF WORK

P&A (Dry Hole) TD-6300' 10-3/4" OD surface casing was set at 323'. 9.8# mud laden fluid was placed from 6300' to 382' and from 216' to 15'. 80 sacks of regular cement was placed from 382' to 216' and 5 sacks of regular cement was placed from 15' to top of surface casing. The surface casing was capped by welding a steel plate with a 1" valve and is located below plow depth.

AJJ	
DVR	
WRS	
HHM	
JAM	
FJP	
JJD	<input checked="" type="checkbox"/>
FILE	

I/we hereby swear (or affirm) that the statements herein made are a full and correct report:

Approved:

Date OCT 21 1959

A. J. Gersin
Director

Company Sunray Mid-Continent Oil Co. Date October 20, 1959

Address P.O. Box 2692, Denver 1, Colo. Phone No. CH-4 2961

By F. S. Goddard Title Prod. Coord.
(Signature)

F. S. Goddard