



GMT Exploration Company, LLC

Elbert County, CO (NAD 83)

Irwin-Taylor Pad

IRWIN 6-65 23-11 6HN

Wellbore #1

Plan: Design #1

Standard Planning Report

25 May, 2019



Project: Elbert County, CO (NAD 83)
 Site: Irwin-Taylor Pad
 Well: IRWIN 6-65 23-11 6HN
 Wellbore: Wellbore #1
 Design: Design #1

GMT Exploration Company, LLC



Geodetic System: US State Plane 1983
 Datum: North American Datum 1983
 Ellipsoid: GRS 1980
 Zone: Colorado Central Zone
 System Datum: Mean Sea Level

WELL DETAILS: IRWIN 6-65 23-11 6HN



+N/-S	+E/-W	Northing	Ground Level:	6222.00	Latitude	Longitude
-1478.40	2120.76	1611774.07	Easting	3246626.90	39.509839	-104.625872

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Target
0.00	0.00	0.00	0.00	-1478.40	2120.76	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	-1478.40	2120.76	0.00	0.00	0.00	
1461.10	23.22	308.78	1429.57	-1333.02	1939.83	2.00	308.78	166.40	
6602.54	23.22	308.78	6154.47	-63.23	359.53	0.00	0.00	1619.85	
7763.64	0.00	0.00	7284.04	82.14	178.60	2.00	180.00	1786.26	
8063.64	0.00	0.00	7584.04	82.14	178.60	0.00	0.00	1786.26	
8963.64	90.00	0.88	8157.00	655.03	187.44	10.00	0.00	2353.77	FTP-IRWIN 6-65 23-11 6HN
20968.46	90.00	0.88	8157.00	12658.43	372.60	0.00	0.00	14244.50	LTP-IRWIN 6-65 23-11 6HN
21018.46	90.00	0.88	8157.00	12708.42	373.37	0.00	0.00	14294.02	BHL-IRWIN 6-65 23-11 6HN

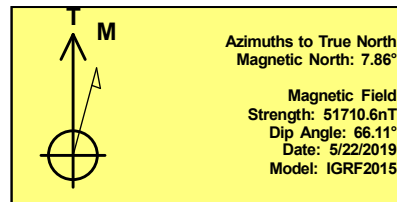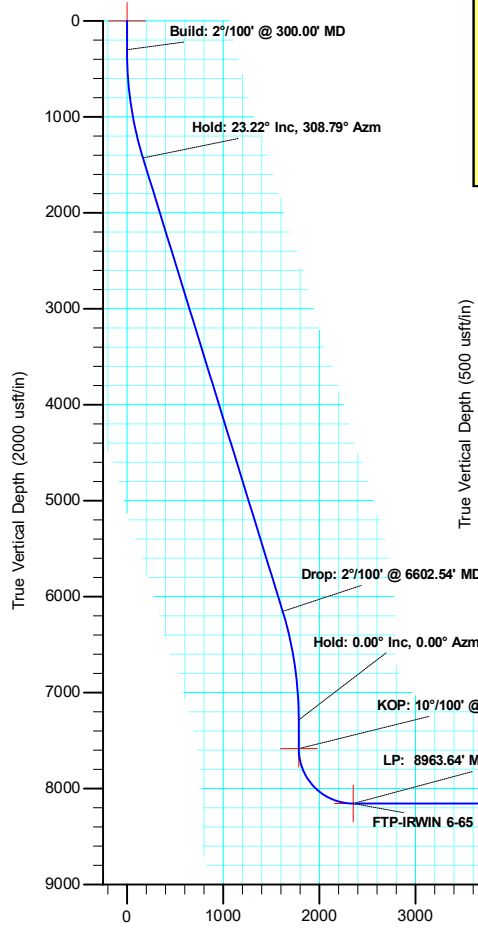

SHL: 1124 FSL/ 431 FEL Sec. 23
 FTP: 2037 FNL/ 2379 FEL Sec. 23
 LTP: 600 FNL/ 2370 FEL Sec. 11
 BHL: 550 FNL/ 2370 FEL Sec. 11

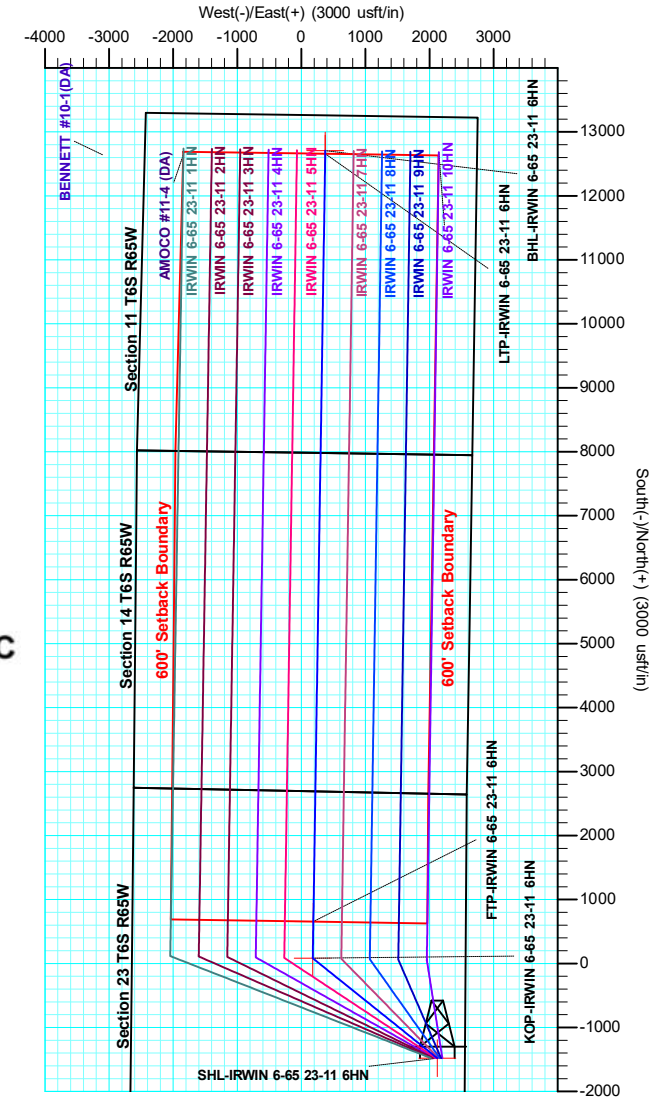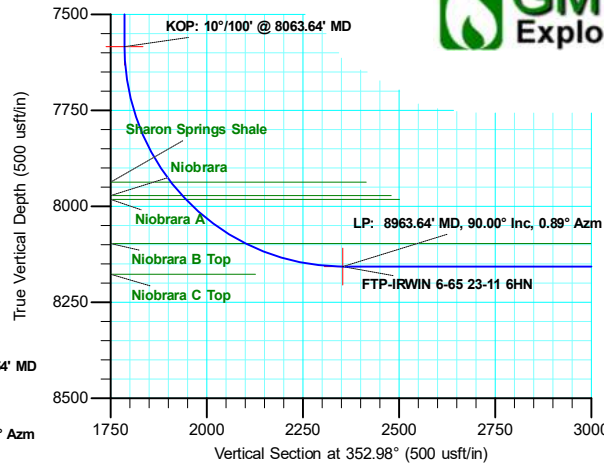



Database:	Local	Local Co-ordinate Reference:	Well IRWIN 6-65 23-11 6HN
Company:	GMT Exploration Company, LLC	TVD Reference:	KB @ 6242.00usft
Project:	Elbert County, CO (NAD 83)	MD Reference:	KB @ 6242.00usft
Site:	Irwin-Taylor Pad	North Reference:	True
Well:	IRWIN 6-65 23-11 6HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	Elbert County, CO (NAD 83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Central Zone		

Site	Irwin-Taylor Pad				
Site Position:		Northing:	1,613,232.16 usft	Latitude:	39.513898
From:	Lat/Long	Easting:	3,244,492.14 usft	Longitude:	-104.633389
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.55 °

Well	IRWIN 6-65 23-11 6HN					
Well Position	+N/-S	-1,478.40 usft	Northing:	1,611,774.07 usft	Latitude:	39.509839
	+E/-W	2,120.76 usft	Easting:	3,246,626.90 usft	Longitude:	-104.625873
Position Uncertainty		0.00 usft	Wellhead Elevation:		Ground Level:	6,222.00 usft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	5/22/2019	7.86	66.11	51,710.60533860

Design	Design #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	352.98

Plan Survey Tool Program	Date	5/24/2019			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	21,018.46	Design #1 (Wellbore #1)	MWD	
				OWSG MWD - Standard	

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,461.10	23.22	308.79	1,429.57	145.39	-180.91	2.00	2.00	0.00	308.79	
6,602.54	23.22	308.79	6,154.47	1,415.31	-1,761.11	0.00	0.00	0.00	0.00	
7,763.64	0.00	0.00	7,284.04	1,560.70	-1,942.03	2.00	-2.00	0.00	180.00	
8,063.64	0.00	0.00	7,584.04	1,560.70	-1,942.03	0.00	0.00	0.00	0.00	
8,963.64	90.00	0.89	8,157.00	2,133.59	-1,933.14	10.00	10.00	0.00	0.00	FTP-IRWIN 6-65 23
20,968.46	90.00	0.89	8,157.00	14,136.97	-1,746.99	0.00	0.00	0.00	0.00	LTP-IRWIN 6-65 23
21,018.46	90.00	0.89	8,157.00	14,186.96	-1,746.21	0.00	0.00	0.00	0.00	BHL-IRWIN 6-65 23



Database:	Local	Local Co-ordinate Reference:	Well IRWIN6-65 23-11 6HN
Company:	GMT Exploration Company, LLC	TVD Reference:	KB @ 6242.00usft
Project:	Elbert County, CO (NAD 83)	MD Reference:	KB @ 6242.00usft
Site:	Irwin-Taylor Pad	North Reference:	True
Well:	IRWIN 6-65 23-11 6HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
SHL-IRWIN 6-65 23-11 6HN										
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	
Build: 2°/100' @ 300.00' MD										
400.00	2.00	308.79	399.98	1.09	-1.36	1.25	2.00	2.00	0.00	
500.00	4.00	308.79	499.84	4.37	-5.44	5.00	2.00	2.00	0.00	
600.00	6.00	308.79	599.45	9.83	-12.23	11.25	2.00	2.00	0.00	
700.00	8.00	308.79	698.70	17.46	-21.73	19.99	2.00	2.00	0.00	
800.00	10.00	308.79	797.47	27.26	-33.93	31.20	2.00	2.00	0.00	
900.00	12.00	308.79	895.62	39.22	-48.80	44.88	2.00	2.00	0.00	
1,000.00	14.00	308.79	993.06	53.31	-66.33	61.01	2.00	2.00	0.00	
1,100.00	16.00	308.79	1,089.64	69.52	-86.50	79.57	2.00	2.00	0.00	
1,200.00	18.00	308.79	1,185.27	87.83	-109.29	100.53	2.00	2.00	0.00	
1,300.00	20.00	308.79	1,279.82	108.23	-134.67	123.87	2.00	2.00	0.00	
1,400.00	22.00	308.79	1,373.17	130.67	-162.60	149.56	2.00	2.00	0.00	
1,461.10	23.22	308.79	1,429.57	145.39	-180.91	166.40	2.00	2.00	0.00	
Hold: 23.22° Inc, 308.79° Azm										
1,500.00	23.22	308.79	1,465.32	155.00	-192.87	177.40	0.00	0.00	0.00	
1,600.00	23.22	308.79	1,557.22	179.70	-223.60	205.67	0.00	0.00	0.00	
1,700.00	23.22	308.79	1,649.12	204.40	-254.34	233.94	0.00	0.00	0.00	
1,800.00	23.22	308.79	1,741.01	229.10	-285.07	262.21	0.00	0.00	0.00	
1,900.00	23.22	308.79	1,832.91	253.80	-315.81	290.48	0.00	0.00	0.00	
2,000.00	23.22	308.79	1,924.81	278.50	-346.54	318.75	0.00	0.00	0.00	
2,100.00	23.22	308.79	2,016.71	303.20	-377.28	347.01	0.00	0.00	0.00	
2,200.00	23.22	308.79	2,108.61	327.90	-408.01	375.28	0.00	0.00	0.00	
2,300.00	23.22	308.79	2,200.51	352.60	-438.75	403.55	0.00	0.00	0.00	
2,400.00	23.22	308.79	2,292.41	377.30	-469.48	431.82	0.00	0.00	0.00	
2,500.00	23.22	308.79	2,384.30	401.99	-500.21	460.09	0.00	0.00	0.00	
2,600.00	23.22	308.79	2,476.20	426.69	-530.95	488.36	0.00	0.00	0.00	
2,700.00	23.22	308.79	2,568.10	451.39	-561.68	516.63	0.00	0.00	0.00	
2,800.00	23.22	308.79	2,660.00	476.09	-592.42	544.90	0.00	0.00	0.00	
2,900.00	23.22	308.79	2,751.90	500.79	-623.15	573.17	0.00	0.00	0.00	
3,000.00	23.22	308.79	2,843.80	525.49	-653.89	601.44	0.00	0.00	0.00	
3,100.00	23.22	308.79	2,935.69	550.19	-684.62	629.71	0.00	0.00	0.00	
3,200.00	23.22	308.79	3,027.59	574.89	-715.36	657.98	0.00	0.00	0.00	
3,300.00	23.22	308.79	3,119.49	599.59	-746.09	686.25	0.00	0.00	0.00	
3,400.00	23.22	308.79	3,211.39	624.29	-776.83	714.52	0.00	0.00	0.00	
3,500.00	23.22	308.79	3,303.29	648.99	-807.56	742.79	0.00	0.00	0.00	
3,600.00	23.22	308.79	3,395.19	673.69	-838.30	771.05	0.00	0.00	0.00	
3,700.00	23.22	308.79	3,487.08	698.39	-869.03	799.32	0.00	0.00	0.00	
3,800.00	23.22	308.79	3,578.98	723.09	-899.76	827.59	0.00	0.00	0.00	
3,900.00	23.22	308.79	3,670.88	747.79	-930.50	855.86	0.00	0.00	0.00	
4,000.00	23.22	308.79	3,762.78	772.49	-961.23	884.13	0.00	0.00	0.00	
4,100.00	23.22	308.79	3,854.68	797.19	-991.97	912.40	0.00	0.00	0.00	
4,200.00	23.22	308.79	3,946.58	821.89	-1,022.70	940.67	0.00	0.00	0.00	
4,300.00	23.22	308.79	4,038.47	846.59	-1,053.44	968.94	0.00	0.00	0.00	
4,400.00	23.22	308.79	4,130.37	871.29	-1,084.17	997.21	0.00	0.00	0.00	
4,500.00	23.22	308.79	4,222.27	895.99	-1,114.91	1,025.48	0.00	0.00	0.00	
4,600.00	23.22	308.79	4,314.17	920.69	-1,145.64	1,053.75	0.00	0.00	0.00	
4,700.00	23.22	308.79	4,406.07	945.39	-1,176.38	1,082.02	0.00	0.00	0.00	
4,800.00	23.22	308.79	4,497.97	970.09	-1,207.11	1,110.29	0.00	0.00	0.00	



Database:	Local	Local Co-ordinate Reference:	Well IRWIN 6-65 23-11 6HN
Company:	GMT Exploration Company, LLC	TVD Reference:	KB @ 6242.00usft
Project:	Elbert County, CO (NAD 83)	MD Reference:	KB @ 6242.00usft
Site:	Irwin-Taylor Pad	North Reference:	True
Well:	IRWIN 6-65 23-11 6HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
4,900.00	23.22	308.79	4,589.86	994.79	-1,237.85	1,138.56	0.00	0.00	0.00	
5,000.00	23.22	308.79	4,681.76	1,019.49	-1,268.58	1,166.83	0.00	0.00	0.00	
5,100.00	23.22	308.79	4,773.66	1,044.19	-1,299.31	1,195.10	0.00	0.00	0.00	
5,200.00	23.22	308.79	4,865.56	1,068.89	-1,330.05	1,223.36	0.00	0.00	0.00	
5,300.00	23.22	308.79	4,957.46	1,093.59	-1,360.78	1,251.63	0.00	0.00	0.00	
5,400.00	23.22	308.79	5,049.36	1,118.29	-1,391.52	1,279.90	0.00	0.00	0.00	
5,500.00	23.22	308.79	5,141.25	1,142.99	-1,422.25	1,308.17	0.00	0.00	0.00	
5,600.00	23.22	308.79	5,233.15	1,167.69	-1,452.99	1,336.44	0.00	0.00	0.00	
5,700.00	23.22	308.79	5,325.05	1,192.39	-1,483.72	1,364.71	0.00	0.00	0.00	
5,800.00	23.22	308.79	5,416.95	1,217.08	-1,514.46	1,392.98	0.00	0.00	0.00	
5,900.00	23.22	308.79	5,508.85	1,241.78	-1,545.19	1,421.25	0.00	0.00	0.00	
6,000.00	23.22	308.79	5,600.75	1,266.48	-1,575.93	1,449.52	0.00	0.00	0.00	
6,100.00	23.22	308.79	5,692.64	1,291.18	-1,606.66	1,477.79	0.00	0.00	0.00	
6,200.00	23.22	308.79	5,784.54	1,315.88	-1,637.40	1,506.06	0.00	0.00	0.00	
6,300.00	23.22	308.79	5,876.44	1,340.58	-1,668.13	1,534.33	0.00	0.00	0.00	
6,400.00	23.22	308.79	5,968.34	1,365.28	-1,698.86	1,562.60	0.00	0.00	0.00	
6,500.00	23.22	308.79	6,060.24	1,389.98	-1,729.60	1,590.87	0.00	0.00	0.00	
6,602.54	23.22	308.79	6,154.47	1,415.31	-1,761.11	1,619.85	0.00	0.00	0.00	
Drop: 2°/100' @ 6602.54' MD										
6,700.00	21.27	308.79	6,244.67	1,438.42	-1,789.88	1,646.31	2.00	-2.00	0.00	
6,800.00	19.27	308.79	6,338.47	1,460.13	-1,816.88	1,671.15	2.00	-2.00	0.00	
6,900.00	17.27	308.79	6,433.42	1,479.77	-1,841.32	1,693.63	2.00	-2.00	0.00	
7,000.00	15.27	308.79	6,529.41	1,497.32	-1,863.16	1,713.72	2.00	-2.00	0.00	
7,100.00	13.27	308.79	6,626.32	1,512.76	-1,882.38	1,731.39	2.00	-2.00	0.00	
7,200.00	11.27	308.79	6,724.03	1,526.08	-1,898.95	1,746.63	2.00	-2.00	0.00	
7,300.00	9.27	308.79	6,822.42	1,537.25	-1,912.85	1,759.41	2.00	-2.00	0.00	
7,400.00	7.27	308.79	6,921.38	1,546.26	-1,924.06	1,769.73	2.00	-2.00	0.00	
7,500.00	5.27	308.79	7,020.77	1,553.11	-1,932.58	1,777.56	2.00	-2.00	0.00	
7,600.00	3.27	308.79	7,120.49	1,557.77	-1,938.39	1,782.91	2.00	-2.00	0.00	
7,700.00	1.27	308.79	7,220.41	1,560.26	-1,941.48	1,785.75	2.00	-2.00	0.00	
7,763.64	0.00	0.00	7,284.04	1,560.70	-1,942.03	1,786.26	2.00	-2.00	0.00	
Hold: 0.00° Inc, 0.00° Azm										
7,800.00	0.00	0.00	7,320.40	1,560.70	-1,942.03	1,786.26	0.00	0.00	0.00	
7,900.00	0.00	0.00	7,420.40	1,560.70	-1,942.03	1,786.26	0.00	0.00	0.00	
8,000.00	0.00	0.00	7,520.40	1,560.70	-1,942.03	1,786.26	0.00	0.00	0.00	
8,063.64	0.00	0.00	7,584.04	1,560.70	-1,942.03	1,786.26	0.00	0.00	0.00	
KOP: 10°/100' @ 8063.64' MD - KOP-IRWIN 6-65 23-11 6HN										
8,100.00	3.64	0.89	7,620.38	1,561.85	-1,942.01	1,787.40	10.00	10.00	0.00	
8,150.00	8.64	0.89	7,670.08	1,567.19	-1,941.93	1,792.69	10.00	10.00	0.00	
8,200.00	13.64	0.89	7,719.12	1,576.85	-1,941.78	1,802.25	10.00	10.00	0.00	
8,250.00	18.64	0.89	7,767.13	1,590.74	-1,941.56	1,816.01	10.00	10.00	0.00	
8,300.00	23.64	0.89	7,813.75	1,608.76	-1,941.28	1,833.86	10.00	10.00	0.00	
8,350.00	28.64	0.89	7,858.63	1,630.77	-1,940.94	1,855.67	10.00	10.00	0.00	
8,400.00	33.64	0.89	7,901.41	1,656.62	-1,940.54	1,881.27	10.00	10.00	0.00	
8,450.00	38.64	0.89	7,941.78	1,686.09	-1,940.08	1,910.47	10.00	10.00	0.00	
8,500.00	43.64	0.89	7,979.43	1,718.97	-1,939.57	1,943.04	10.00	10.00	0.00	
8,550.00	48.64	0.89	8,014.06	1,755.00	-1,939.01	1,978.73	10.00	10.00	0.00	
8,600.00	53.64	0.89	8,045.43	1,793.91	-1,938.41	2,017.28	10.00	10.00	0.00	
8,650.00	58.64	0.89	8,073.28	1,835.41	-1,937.77	2,058.39	10.00	10.00	0.00	
8,700.00	63.64	0.89	8,097.41	1,879.18	-1,937.09	2,101.75	10.00	10.00	0.00	
8,750.00	68.64	0.89	8,117.63	1,924.89	-1,936.38	2,147.03	10.00	10.00	0.00	
8,800.00	73.64	0.89	8,133.79	1,972.18	-1,935.65	2,193.88	10.00	10.00	0.00	
8,850.00	78.64	0.89	8,145.77	2,020.71	-1,934.89	2,241.94	10.00	10.00	0.00	



Database:	Local	Local Co-ordinate Reference:	Well IRWIN6-65 23-11 6HN
Company:	GMT Exploration Company, LLC	TVD Reference:	KB @ 6242.00usft
Project:	Elbert County, CO (NAD 83)	MD Reference:	KB @ 6242.00usft
Site:	Irwin-Taylor Pad	North Reference:	True
Well:	IRWIN 6-65 23-11 6HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
8,900.00	83.64	0.89	8,153.47	2,070.09	-1,934.13	2,290.86	10.00	10.00	0.00	
8,950.00	88.64	0.89	8,156.84	2,119.95	-1,933.35	2,340.26	10.00	10.00	0.00	
8,963.64	90.00	0.89	8,157.00	2,133.59	-1,933.14	2,353.77	10.00	10.00	0.00	
LP: 8963.64' MD, 90.00° Inc, 0.89° Azm - FTP-IRWIN 6-65 23-11 6HN										
9,000.00	90.00	0.89	8,157.00	2,169.94	-1,932.58	2,389.78	0.00	0.00	0.00	
9,100.00	90.00	0.89	8,157.00	2,269.93	-1,931.03	2,488.83	0.00	0.00	0.00	
9,200.00	90.00	0.89	8,157.00	2,369.92	-1,929.48	2,587.88	0.00	0.00	0.00	
9,300.00	90.00	0.89	8,157.00	2,469.91	-1,927.93	2,686.93	0.00	0.00	0.00	
9,400.00	90.00	0.89	8,157.00	2,569.90	-1,926.38	2,785.98	0.00	0.00	0.00	
9,500.00	90.00	0.89	8,157.00	2,669.88	-1,924.83	2,885.03	0.00	0.00	0.00	
9,600.00	90.00	0.89	8,157.00	2,769.87	-1,923.27	2,984.08	0.00	0.00	0.00	
9,700.00	90.00	0.89	8,157.00	2,869.86	-1,921.72	3,083.13	0.00	0.00	0.00	
9,800.00	90.00	0.89	8,157.00	2,969.85	-1,920.17	3,182.18	0.00	0.00	0.00	
9,900.00	90.00	0.89	8,157.00	3,069.84	-1,918.62	3,281.23	0.00	0.00	0.00	
10,000.00	90.00	0.89	8,157.00	3,169.82	-1,917.07	3,380.28	0.00	0.00	0.00	
10,100.00	90.00	0.89	8,157.00	3,269.81	-1,915.52	3,479.33	0.00	0.00	0.00	
10,200.00	90.00	0.89	8,157.00	3,369.80	-1,913.97	3,578.38	0.00	0.00	0.00	
10,300.00	90.00	0.89	8,157.00	3,469.79	-1,912.42	3,677.43	0.00	0.00	0.00	
10,400.00	90.00	0.89	8,157.00	3,569.78	-1,910.87	3,776.48	0.00	0.00	0.00	
10,500.00	90.00	0.89	8,157.00	3,669.76	-1,909.32	3,875.53	0.00	0.00	0.00	
10,600.00	90.00	0.89	8,157.00	3,769.75	-1,907.77	3,974.58	0.00	0.00	0.00	
10,700.00	90.00	0.89	8,157.00	3,869.74	-1,906.22	4,073.63	0.00	0.00	0.00	
10,800.00	90.00	0.89	8,157.00	3,969.73	-1,904.67	4,172.67	0.00	0.00	0.00	
10,900.00	90.00	0.89	8,157.00	4,069.72	-1,903.12	4,271.72	0.00	0.00	0.00	
11,000.00	90.00	0.89	8,157.00	4,169.70	-1,901.57	4,370.77	0.00	0.00	0.00	
11,100.00	90.00	0.89	8,157.00	4,269.69	-1,900.01	4,469.82	0.00	0.00	0.00	
11,200.00	90.00	0.89	8,157.00	4,369.68	-1,898.46	4,568.87	0.00	0.00	0.00	
11,300.00	90.00	0.89	8,157.00	4,469.67	-1,896.91	4,667.92	0.00	0.00	0.00	
11,400.00	90.00	0.89	8,157.00	4,569.66	-1,895.36	4,766.97	0.00	0.00	0.00	
11,500.00	90.00	0.89	8,157.00	4,669.64	-1,893.81	4,866.02	0.00	0.00	0.00	
11,600.00	90.00	0.89	8,157.00	4,769.63	-1,892.26	4,965.07	0.00	0.00	0.00	
11,700.00	90.00	0.89	8,157.00	4,869.62	-1,890.71	5,064.12	0.00	0.00	0.00	
11,800.00	90.00	0.89	8,157.00	4,969.61	-1,889.16	5,163.17	0.00	0.00	0.00	
11,900.00	90.00	0.89	8,157.00	5,069.59	-1,887.61	5,262.22	0.00	0.00	0.00	
12,000.00	90.00	0.89	8,157.00	5,169.58	-1,886.06	5,361.27	0.00	0.00	0.00	
12,100.00	90.00	0.89	8,157.00	5,269.57	-1,884.51	5,460.32	0.00	0.00	0.00	
12,200.00	90.00	0.89	8,157.00	5,369.56	-1,882.96	5,559.37	0.00	0.00	0.00	
12,300.00	90.00	0.89	8,157.00	5,469.55	-1,881.41	5,658.42	0.00	0.00	0.00	
12,400.00	90.00	0.89	8,157.00	5,569.53	-1,879.86	5,757.47	0.00	0.00	0.00	
12,500.00	90.00	0.89	8,157.00	5,669.52	-1,878.31	5,856.52	0.00	0.00	0.00	
12,600.00	90.00	0.89	8,157.00	5,769.51	-1,876.75	5,955.57	0.00	0.00	0.00	
12,700.00	90.00	0.89	8,157.00	5,869.50	-1,875.20	6,054.62	0.00	0.00	0.00	
12,800.00	90.00	0.89	8,157.00	5,969.49	-1,873.65	6,153.67	0.00	0.00	0.00	
12,900.00	90.00	0.89	8,157.00	6,069.47	-1,872.10	6,252.72	0.00	0.00	0.00	
13,000.00	90.00	0.89	8,157.00	6,169.46	-1,870.55	6,351.77	0.00	0.00	0.00	
13,100.00	90.00	0.89	8,157.00	6,269.45	-1,869.00	6,450.82	0.00	0.00	0.00	
13,200.00	90.00	0.89	8,157.00	6,369.44	-1,867.45	6,549.87	0.00	0.00	0.00	
13,300.00	90.00	0.89	8,157.00	6,469.43	-1,865.90	6,648.92	0.00	0.00	0.00	
13,400.00	90.00	0.89	8,157.00	6,569.41	-1,864.35	6,747.97	0.00	0.00	0.00	
13,500.00	90.00	0.89	8,157.00	6,669.40	-1,862.80	6,847.01	0.00	0.00	0.00	
13,600.00	90.00	0.89	8,157.00	6,769.39	-1,861.25	6,946.06	0.00	0.00	0.00	
13,700.00	90.00	0.89	8,157.00	6,869.38	-1,859.70	7,045.11	0.00	0.00	0.00	
13,800.00	90.00	0.89	8,157.00	6,969.37	-1,858.15	7,144.16	0.00	0.00	0.00	
13,900.00	90.00	0.89	8,157.00	7,069.35	-1,856.60	7,243.21	0.00	0.00	0.00	



Database:	Local	Local Co-ordinate Reference:	Well IRWIN6-65 23-11 6HN
Company:	GMT Exploration Company, LLC	TVD Reference:	KB @ 6242.00usft
Project:	Elbert County, CO (NAD 83)	MD Reference:	KB @ 6242.00usft
Site:	Irwin-Taylor Pad	North Reference:	True
Well:	IRWIN 6-65 23-11 6HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
14,000.00	90.00	0.89	8,157.00	7,169.34	-1,855.04	7,342.26	0.00	0.00	0.00
14,100.00	90.00	0.89	8,157.00	7,269.33	-1,853.49	7,441.31	0.00	0.00	0.00
14,200.00	90.00	0.89	8,157.00	7,369.32	-1,851.94	7,540.36	0.00	0.00	0.00
14,300.00	90.00	0.89	8,157.00	7,469.31	-1,850.39	7,639.41	0.00	0.00	0.00
14,400.00	90.00	0.89	8,157.00	7,569.29	-1,848.84	7,738.46	0.00	0.00	0.00
14,500.00	90.00	0.89	8,157.00	7,669.28	-1,847.29	7,837.51	0.00	0.00	0.00
14,600.00	90.00	0.89	8,157.00	7,769.27	-1,845.74	7,936.56	0.00	0.00	0.00
14,700.00	90.00	0.89	8,157.00	7,869.26	-1,844.19	8,035.61	0.00	0.00	0.00
14,800.00	90.00	0.89	8,157.00	7,969.25	-1,842.64	8,134.66	0.00	0.00	0.00
14,900.00	90.00	0.89	8,157.00	8,069.23	-1,841.09	8,233.71	0.00	0.00	0.00
15,000.00	90.00	0.89	8,157.00	8,169.22	-1,839.54	8,332.76	0.00	0.00	0.00
15,100.00	90.00	0.89	8,157.00	8,269.21	-1,837.99	8,431.81	0.00	0.00	0.00
15,200.00	90.00	0.89	8,157.00	8,369.20	-1,836.44	8,530.86	0.00	0.00	0.00
15,300.00	90.00	0.89	8,157.00	8,469.19	-1,834.89	8,629.91	0.00	0.00	0.00
15,400.00	90.00	0.89	8,157.00	8,569.17	-1,833.34	8,728.96	0.00	0.00	0.00
15,500.00	90.00	0.89	8,157.00	8,669.16	-1,831.78	8,828.01	0.00	0.00	0.00
15,600.00	90.00	0.89	8,157.00	8,769.15	-1,830.23	8,927.06	0.00	0.00	0.00
15,700.00	90.00	0.89	8,157.00	8,869.14	-1,828.68	9,026.11	0.00	0.00	0.00
15,800.00	90.00	0.89	8,157.00	8,969.13	-1,827.13	9,125.16	0.00	0.00	0.00
15,900.00	90.00	0.89	8,157.00	9,069.11	-1,825.58	9,224.21	0.00	0.00	0.00
16,000.00	90.00	0.89	8,157.00	9,169.10	-1,824.03	9,323.26	0.00	0.00	0.00
16,100.00	90.00	0.89	8,157.00	9,269.09	-1,822.48	9,422.31	0.00	0.00	0.00
16,200.00	90.00	0.89	8,157.00	9,369.08	-1,820.93	9,521.35	0.00	0.00	0.00
16,300.00	90.00	0.89	8,157.00	9,469.07	-1,819.38	9,620.40	0.00	0.00	0.00
16,400.00	90.00	0.89	8,157.00	9,569.05	-1,817.83	9,719.45	0.00	0.00	0.00
16,500.00	90.00	0.89	8,157.00	9,669.04	-1,816.28	9,818.50	0.00	0.00	0.00
16,600.00	90.00	0.89	8,157.00	9,769.03	-1,814.73	9,917.55	0.00	0.00	0.00
16,700.00	90.00	0.89	8,157.00	9,869.02	-1,813.18	10,016.60	0.00	0.00	0.00
16,800.00	90.00	0.89	8,157.00	9,969.01	-1,811.63	10,115.65	0.00	0.00	0.00
16,900.00	90.00	0.89	8,157.00	10,068.99	-1,810.08	10,214.70	0.00	0.00	0.00
17,000.00	90.00	0.89	8,157.00	10,168.98	-1,808.52	10,313.75	0.00	0.00	0.00
17,100.00	90.00	0.89	8,157.00	10,268.97	-1,806.97	10,412.80	0.00	0.00	0.00
17,200.00	90.00	0.89	8,157.00	10,368.96	-1,805.42	10,511.85	0.00	0.00	0.00
17,300.00	90.00	0.89	8,157.00	10,468.95	-1,803.87	10,610.90	0.00	0.00	0.00
17,400.00	90.00	0.89	8,157.00	10,568.93	-1,802.32	10,709.95	0.00	0.00	0.00
17,500.00	90.00	0.89	8,157.00	10,668.92	-1,800.77	10,809.00	0.00	0.00	0.00
17,600.00	90.00	0.89	8,157.00	10,768.91	-1,799.22	10,908.05	0.00	0.00	0.00
17,700.00	90.00	0.89	8,157.00	10,868.90	-1,797.67	11,007.10	0.00	0.00	0.00
17,800.00	90.00	0.89	8,157.00	10,968.89	-1,796.12	11,106.15	0.00	0.00	0.00
17,900.00	90.00	0.89	8,157.00	11,068.87	-1,794.57	11,205.20	0.00	0.00	0.00
18,000.00	90.00	0.89	8,157.00	11,168.86	-1,793.02	11,304.25	0.00	0.00	0.00
18,100.00	90.00	0.89	8,157.00	11,268.85	-1,791.47	11,403.30	0.00	0.00	0.00
18,200.00	90.00	0.89	8,157.00	11,368.84	-1,789.92	11,502.35	0.00	0.00	0.00
18,300.00	90.00	0.89	8,157.00	11,468.83	-1,788.37	11,601.40	0.00	0.00	0.00
18,400.00	90.00	0.89	8,157.00	11,568.81	-1,786.82	11,700.45	0.00	0.00	0.00
18,500.00	90.00	0.89	8,157.00	11,668.80	-1,785.26	11,799.50	0.00	0.00	0.00
18,600.00	90.00	0.89	8,157.00	11,768.79	-1,783.71	11,898.55	0.00	0.00	0.00
18,700.00	90.00	0.89	8,157.00	11,868.78	-1,782.16	11,997.60	0.00	0.00	0.00
18,800.00	90.00	0.89	8,157.00	11,968.77	-1,780.61	12,096.65	0.00	0.00	0.00
18,900.00	90.00	0.89	8,157.00	12,068.75	-1,779.06	12,195.69	0.00	0.00	0.00
19,000.00	90.00	0.89	8,157.00	12,168.74	-1,777.51	12,294.74	0.00	0.00	0.00
19,100.00	90.00	0.89	8,157.00	12,268.73	-1,775.96	12,393.79	0.00	0.00	0.00
19,200.00	90.00	0.89	8,157.00	12,368.72	-1,774.41	12,492.84	0.00	0.00	0.00
19,300.00	90.00	0.89	8,157.00	12,468.71	-1,772.86	12,591.89	0.00	0.00	0.00



Database:	Local	Local Co-ordinate Reference:	Well IRWIN 6-65 23-11 6HN
Company:	GMT Exploration Company, LLC	TVD Reference:	KB @ 6242.00usft
Project:	Elbert County, CO (NAD 83)	MD Reference:	KB @ 6242.00usft
Site:	Irwin-Taylor Pad	North Reference:	True
Well:	IRWIN 6-65 23-11 6HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
19,400.00	90.00	0.89	8,157.00	12,568.69	-1,771.31	12,690.94	0.00	0.00	0.00	
19,500.00	90.00	0.89	8,157.00	12,668.68	-1,769.76	12,789.99	0.00	0.00	0.00	
19,600.00	90.00	0.89	8,157.00	12,768.67	-1,768.21	12,889.04	0.00	0.00	0.00	
19,700.00	90.00	0.89	8,157.00	12,868.66	-1,766.66	12,988.09	0.00	0.00	0.00	
19,800.00	90.00	0.89	8,157.00	12,968.65	-1,765.11	13,087.14	0.00	0.00	0.00	
19,900.00	90.00	0.89	8,157.00	13,068.63	-1,763.55	13,186.19	0.00	0.00	0.00	
20,000.00	90.00	0.89	8,157.00	13,168.62	-1,762.00	13,285.24	0.00	0.00	0.00	
20,100.00	90.00	0.89	8,157.00	13,268.61	-1,760.45	13,384.29	0.00	0.00	0.00	
20,200.00	90.00	0.89	8,157.00	13,368.60	-1,758.90	13,483.34	0.00	0.00	0.00	
20,300.00	90.00	0.89	8,157.00	13,468.59	-1,757.35	13,582.39	0.00	0.00	0.00	
20,400.00	90.00	0.89	8,157.00	13,568.57	-1,755.80	13,681.44	0.00	0.00	0.00	
20,500.00	90.00	0.89	8,157.00	13,668.56	-1,754.25	13,780.49	0.00	0.00	0.00	
20,600.00	90.00	0.89	8,157.00	13,768.55	-1,752.70	13,879.54	0.00	0.00	0.00	
20,700.00	90.00	0.89	8,157.00	13,868.54	-1,751.15	13,978.59	0.00	0.00	0.00	
20,800.00	90.00	0.89	8,157.00	13,968.53	-1,749.60	14,077.64	0.00	0.00	0.00	
20,900.00	90.00	0.89	8,157.00	14,068.51	-1,748.05	14,176.69	0.00	0.00	0.00	
20,968.46	90.00	0.89	8,157.00	14,136.97	-1,746.99	14,244.50	0.00	0.00	0.00	
Hold: 90.00° Inc, 0.89° Azm - LTP-IRWIN 6-65 23-11 6HN										
21,000.00	90.00	0.89	8,157.00	14,168.50	-1,746.50	14,275.74	0.00	0.00	0.00	
21,018.46	90.00	0.89	8,157.00	14,186.96	-1,746.21	14,294.03	0.00	0.00	0.00	
TD @ 21018.46' MD/8157.00' TVD - BHL-IRWIN 6-65 23-11 6HN										

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
SHL-IRWIN 6-65 23-1 - plan hits target center - Point	0.00	0.00	0.00	0.00	0.00	1,611,774.07	3,246,626.90	39.509839	-104.625873	
KOP-IRWIN 6-65 23-1 - plan hits target center - Point	0.00	0.00	7,584.04	1,560.70	-1,942.03	1,613,316.01	3,244,669.95	39.514124	-104.632756	
FTP-IRWIN 6-65 23-1 - plan hits target center - Point	0.00	0.00	8,157.00	2,133.59	-1,933.14	1,613,888.96	3,244,673.32	39.515696	-104.632725	
BHL-IRWIN 6-65 23-1 - plan hits target center - Point	0.00	0.00	8,157.00	14,186.96	-1,746.21	1,625,943.57	3,244,744.27	39.548788	-104.632065	
LTP-IRWIN 6-65 23-1 - plan hits target center - Point	0.00	0.00	8,157.00	14,136.97	-1,746.99	1,625,893.57	3,244,743.97	39.548651	-104.632068	



Database:	Local	Local Co-ordinate Reference:	Well IRWIN6-65 23-11 6HN
Company:	GMT Exploration Company, LLC	TVD Reference:	KB @ 6242.00usft
Project:	Elbert County, CO (NAD 83)	MD Reference:	KB @ 6242.00usft
Site:	Irwin-Taylor Pad	North Reference:	True
Well:	IRWIN 6-65 23-11 6HN	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Formations					
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
482.12	482.00	Denver			
2,366.91	2,262.00	Upper Arapahoe			
2,453.97	2,342.00	Laramie - Fox Hills			
2,551.90	2,432.00	Pierre Shale (Base of Fox Hills)			
6,044.89	5,642.00	Sussex Sandstone			
8,443.91	7,937.00	Sharon Springs Shale			
8,489.83	7,972.00	Niobrara			
8,503.57	7,982.00	Niobrara A			
8,699.09	8,097.00	Niobrara B Top			

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
300.00	300.00	0.00	0.00	Build: 2°/100' @ 300.00' MD
1,461.10	1,429.57	145.39	-180.91	Hold: 23.22° Inc, 308.79° Azm
6,602.54	6,154.47	1,415.31	-1,761.11	Drop: 2°/100' @ 6602.54' MD
7,763.64	7,284.04	1,560.70	-1,942.03	Hold: 0.00° Inc, 0.00° Azm
8,063.64	7,584.04	1,560.70	-1,942.03	KOP: 10°/100' @ 8063.64' MD
8,963.64	8,157.00	2,133.59	-1,933.14	LP: 8963.64' MD, 90.00° Inc, 0.89° Azm
20,968.46	8,157.00	14,136.97	-1,746.99	Hold: 90.00° Inc, 0.89° Azm
21,018.46	8,157.00	14,186.96	-1,746.21	TD @ 21018.46' MD/8157.00' TVD