

MONUMENT WELL SERVICE CO.  
P. O. BOX 2641  
GRAND JUNCTION, CO 81502

Date 8/18, 19, 1988

CEMENTING AFFIDAVIT

PULLING & PLUGGING REPORT

Company Coors Energy Co.

Lease Moore Well No. 1-10

Section 10 Township 1N Range 93W Unit \_\_\_\_\_ County Rio Blanco

2099' Ft. of 5½" Casing Recovered

\_\_\_\_\_ Ft. of \_\_\_\_\_ Casing Recovered


PLUGS SET

1. 35 Sax Cement Set At 2050 Ft. \_\_\_\_\_ To 1950 Ft.
2. 45 Sax Cement Set At 318 Ft. \_\_\_\_\_ To 218 Ft.
3. 20 Sax Cement Set At 50 Ft. \_\_\_\_\_ To 0 Ft.
4. \_\_\_\_\_ Sax Cement Set At \_\_\_\_\_ Ft. \_\_\_\_\_ To \_\_\_\_\_ Ft.
5. \_\_\_\_\_ Sax Cement Set At \_\_\_\_\_ Ft. \_\_\_\_\_ To \_\_\_\_\_ Ft.
6. \_\_\_\_\_ Sax Cement Set At \_\_\_\_\_ Ft. \_\_\_\_\_ To \_\_\_\_\_ Ft.
7. \_\_\_\_\_ Sax Cement Set At \_\_\_\_\_ Ft. \_\_\_\_\_ To \_\_\_\_\_ Ft.
8. \_\_\_\_\_ Sax Cement Set At \_\_\_\_\_ Ft. \_\_\_\_\_ To \_\_\_\_\_ Ft.

Other Cement used was Portland type I - II, 100 sacks. Well would not  
circulate for 2 plug. Held 20 sk plug with 8 5/8 T.W.P. & 50' of ½"  
wire rope. Cut 8 5/8 4' below grd. level & welded on 18"x18"x¼" steel  
marker plate.



00038598

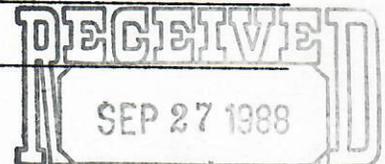

COLO. OIL & GAS CONS. COMM.