J-W WIRELINE COMPANY

CEMENT BOND
GAMMA RAY
COLLAR CORRELATION LOG

Company	NOBLE ENERGY INC.
Well	DECHANT USX X29-05
Field	WATTENBERG
County	WELD
State	COLORADO

Company NOBLE ENERGY INC.
Well DECHANT USX X29-05
Field WATTENBERG
County WELD State COLORADO

Location: API # : 05-123-32929-00
SHL: 2072' FNL & 502' FWL
SWNW
SEC.-29, TWP.-2N, RGE- 65W
SEC TWP RGE

Other Services

Permanent Datum	GROUND LEVEL	Elevation	4946
Log Measured From	KELLY BUSHING		
Drilling Measured From	KELLY BUSHING		

Elevation
K.B. 4959
D.F. 4959
G.L. 4946

Date	17-NOV-2011
Run Number	ONE
Depth Driller	7946
Depth Logger	7877
Bottom Logged Interval	7870
Top Log Interval	1450
Open Hole Size	7 7/8
Type Fluid	WATER
Density / Viscosity	--
Max. Recorded Temp.	250
Estimated Cement Top	1600
Time Well Ready	--
Time Logger on Bottom	--
Equipment Number	2405/RED
Location	BRIGHTON
Recorded By	HAYES/KRAL
Witnessed By	MITCH TRIMBLE

Borehole Record				Tubing Record			
Run Number	Bit	From	To	Size	Weight	From	To

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String	8 5/8	24#	SURFACE	900
Prot. String				
Production String	4.5	11.6#	SURFACE	7936
Liner				

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

LOG CORRELATED TO SD, DN, AC, TR LOG
DATED 01-NOV-2011

LOG SPLIT FOR CORRELATION PURPOSES

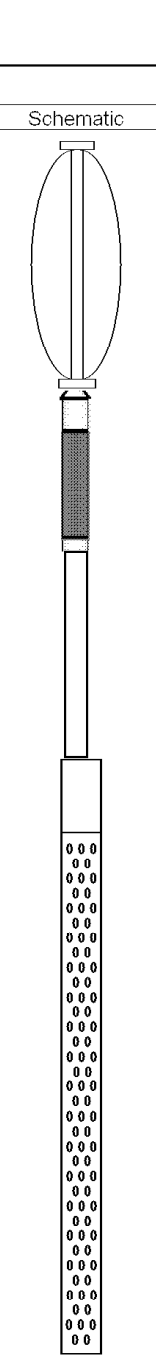

Sensor	Offset (ft)	Description	Len (ft)	OD (in)	Wt (lb)
		CENT-A (1)	3.00	1.69	10.00
CCL	14.06	CCL-275tekco (2.75TEKCO) 2 3/4 TEK CCL Earth Mag	1.96	2.75	20.00
GR	11.49	GR-s_t001 (t001)	2.52	1.69	30.00
WVF5	7.34	CBL-3_5 (001)	7.23	2.44	127.00
WVF3	6.34				
		CENT-B (2)	3.00	1.69	10.00

Dataset: dechant usx x29-05.db: field/well/run1/pass2
Total Length: 17.71 ft
Total Weight: 197.00 lb
O.D. 2.75 in

Database File: dechant usx x29-05.db
Dataset Pathname: pass2
Presentation Format: cblx
Dataset Creation: Thu Nov 17 09:13:34 2011 by Log Std Casedhole 10121
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	200	0	3' Amplitude (mV)	100	200 Variable Density	1200
25	CCL	-1	0	Amplified Amplitude (mV)	30		
300	TT3 (usec)	200					

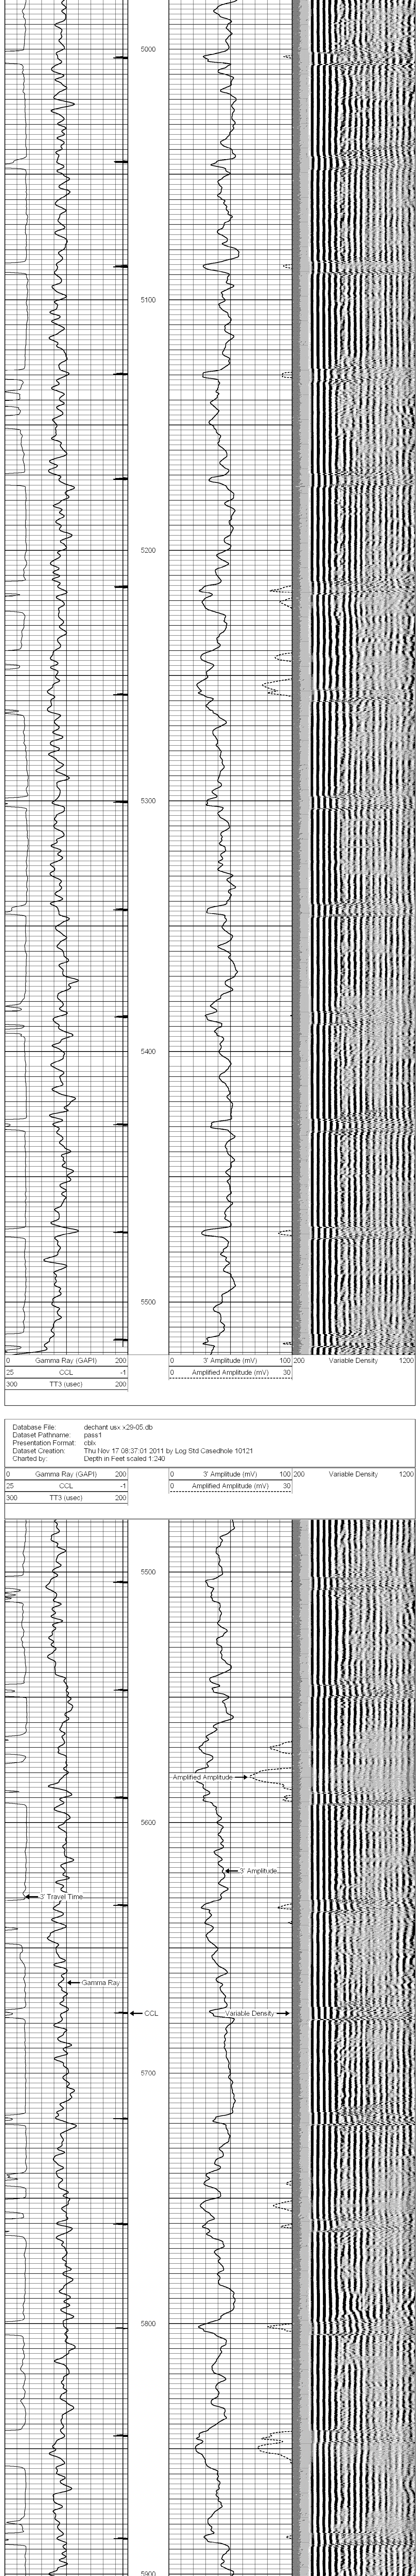

Database File: dechant usx x29-05.db
Dataset Pathname: pass1
Presentation Format: cblx
Dataset Creation: Thu Nov 17 08:37:01 2011 by Log Std Casedhole 10121
Charted by: Depth in Feet scaled 1:240

Calibration Report

Database File: dechant usx x29-05.db
Dataset Pathname: pass2
Dataset Creation: Thu Nov 17 09:13:34 2011 by Log Std Casedhole 10121

Cement Bond Log Calibration Report

Serial Number: 001
Tool Model: 3_5
Performed: Thu Nov 17 08:15:47 2011

Depth:	1069.22	ft	
Casing Diameter:	4.5	in	
	3' Spacing	5' Spacing	
Signal Zero:	3	3	mV
Calibrated Amplitude:	81.1961	81.1961	mV
Reading at Signal Zero:	0.05	0	V
Reading in Free Pipe:	2.5	2.5	V
Gain:	31.9168	31.2784	
Offset:	1.40416	3	

Gamma Ray Calibration Report

Serial Number: t001
Tool Model: s_t001
Performed: Sun Jun 13 14:33:21 1993

Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	1.0000	GAPI/cps