

## Well

Operator  
Location  
County  
State  
Field  
API Number:  
Footages:


## ARISTOCRAT ANGUS 32-8

EnCana Oil & Gas (USA) Inc.  
SWNE Section 8-T3N-R65W  
Weld  
Colorado  
Wattenberg  
005123165770000  
1850' FNL & 2129' FEL

Spud Date: 04-09-1993  
TD Date: 04-15-1993  
1st sales: 05-15-1993

### Log Tops

Sussex 4447'  
Niobrara 6975'  
Codell 7263'

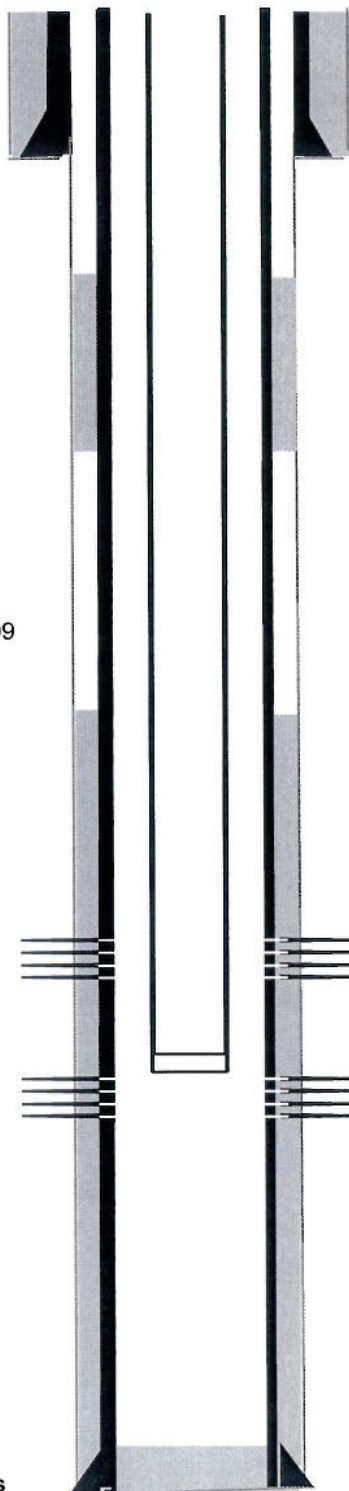

### Surface Casing and Cement

8 5/8", 24#, landed @ 551', cemented with 350 sxs

### Main Hole

7-7/8" to TD

### Production Casing and Cement

4-1/2", 11.6#, landed @ 7379', cemented with 607 sxs

### Niobrara Perfs

Frac'd 6976 – 7042 with 133,875 gal frac fluid containing 250,720# sand. (2/15/12)

Perf'd Niobrara from 6976 – 6984 @ 4 spf, 32 holes  
Frac'd with 147,672 gal 22# Vistar cross linked gel Hybrid containing 250,380# 20/40 sand. (04-22-09)

Perfed 6990-7020, 7070-7100, 7150-7170 2 spf, 160 shots  
Frac w/220,836 gal slickwater w/100,200 # 20/40 sand (7/31/03)

### Codell Perfs

Frac'd 7264-7280 with 113,400 gal frac fluid containing 250,260 # sand. (2/15/12)

Frac'd 7264-7280 (64 holes) with 109,830 gal 26# Vistar Hybrid cross linked gel containing 251,180# 20/40 sand. (04-15-09)

Perf'd the Codell 7264' – 7280' @ 2 spf, 32 holes Frac w/250,020 # 20/40 sand w/131,460 gal Vistar (6/6/01)

### CD/NB

Perf'd Codell from 7264-7278 and Niobrara 6977-6981' & 7038-7042', 96 holes. Frac C/N w/400,000 # 20/40 sand w/ 95,046 gal x-linked Apollo fluid (5/10/93)

### CBP

Set @ 7200' on 04-28-09  
Drilled out on 06-15-09

### Production Tubing

2-3/8", Set @ 7243'  
4/27/12

7379' — Driller's TD