

Well

Operator
Location
County
State
Field
API


ARISTOCRAT ANGUS 21-4C

EnCana Oil & Gas (USA) Inc.
NENW Section 4-T3N-R65W
Weld
Colorado
Wattenberg
05-123-16574

Footages: 726' FNL & 1916' FWL
Spud Date: 12-12-1992
TD Date: 03-07-1993

Log Tops

Sussex 4391'
Niobrara 6910'
Codell 7190'

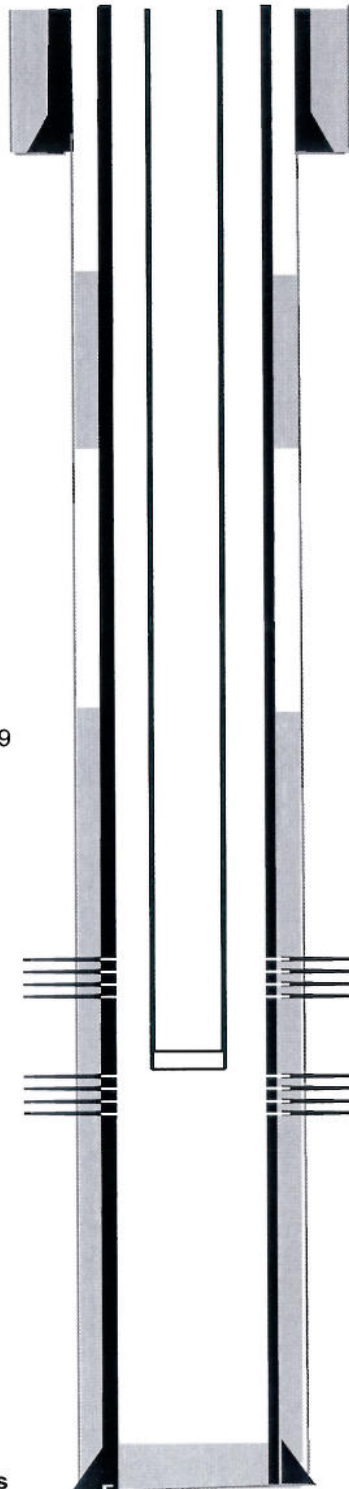

Surface Casing and Cement

8 5/8", 24#, landed @ 620', cemented with 280 sxs

Main Hole

7-7/8" to TD

Production Casing and Cement

4-1/2", 11.6#, landed @ 7325', cemented with 398 sxs

CBP

Set @ 7030' on 2/27/12
Drilled out 3/16/12

RBP

Set @ 7150' on 05-18-09
Released on 06-21-09

Niobrara

Perf'd the Niobrara from 6885' – 6889', 6910' – 6944', 6985' – 6989', 7082' – 7126' @ 2 spf, 184 holes
Frac'd with 188,916 gal 28# to 16# Vistar cross linked gel Hybrid containing 351,180# 30/50 sand. 05-19-09

Refrac'd with 3049 bbls frac fluid and 250,660 # sand (3/5/12)

Codell

Perf'd the Codell from 7190' - 7206' @ 2 spf, 32 holes . 02-07-01
Frac'd with 136,000 gals Vistar 22 LHT and 253,819# 20/40 frac sand 1 ppg thru 4 ppg. 02-10-01

Refrac'd 7190-7206 with 2758 bbls frac fluid and 256,413 # sand (2/18/12)

Production Tubing

2-3/8", Set @ 7178'
3/17/2012

7334' — Driller's
TD