

Well

Operator

Location

County

State

Field

Footages

MAIER 8-4-28

EnCana Oil & Gas (USA) Inc.

SWNE SEC. 28-T2N-R66W

WELD

Colorado

Wattenberg

1779' FNL & 2190' FEL

Spud Date:

06-23-12


TD Date:

06-29-12

Log Tops

Sussex	5055'
Niobrara	7671'
Codell	7919'
J Sand	8366'

Production Tubing  
2-3/8" tubing, set @8359'

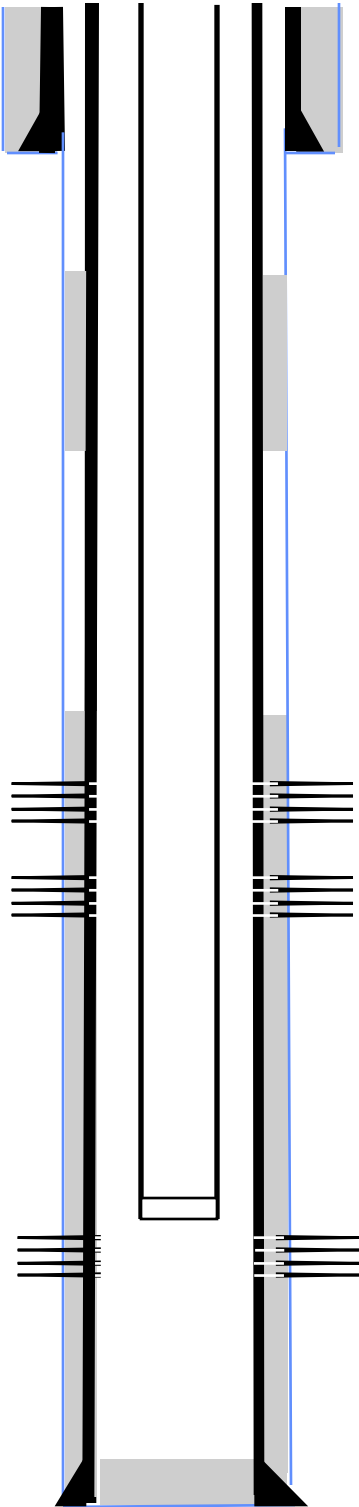

Surface Casing and Cement  
8 5/8" , 24#, landed @ 919',cemented with 345 sxs

Main Hole  
7-7/8" to TD

Production Casing and Cement  
4-1/2", 11.6#, landed @ 8495',cemented with 660 sxs

CBP  
Set @ 7560'. 08-24-12  
Drilled out on 08-25-12

Perf'd the Niobrara 7,751' – 7,763' @ 4 spf  
Frac'd the Niobrara 7,751' – 7,763' (48 holes), w/ 94,920 gals 18 # Vistar Hybrid cross linked gel containing 250,740 # 30/50 sand.

CFP  
Set @ 7810'. 07-26-12  
Drilled out on 08-25-12

Perf'd the Codell 7,920' – 7,934' @ 3 spf  
Frac'd the Codell 7,920' – 7,934' (42 holes) w/ 90,342 gal 22# Vistar Hybrid cross linked gel containing 250,780 # 30/50 sand.  
07-26-12

CFP  
Set @ 7980'. 07-26-12  
Drilled out on 08-25-12

Perf'd the J Sand 8,393' – 8,418' @ 2 spf  
Frac'd the J-Sand 8,393' – 8,418', (50 holes)w/ 62,118 gal 18 # Vistar Hybrid cross linked gel containing 250,810 # 20/40 Sand.  
07-26-12