

Well

Operator

Location

County

State

Field

Footages

Aristocrat Angus 8-2-4

EnCana Oil & Gas (USA) Inc.

SESW Section 4-T3N-R65W

WELD

Colorado

Wattenberg

604' FNL; 1078' FEL

Spud Date:

08-08-12

TD Date:

08-12-12

Log Tops

Sussex


4536'

Niobrara

7065'

Codell

7346'

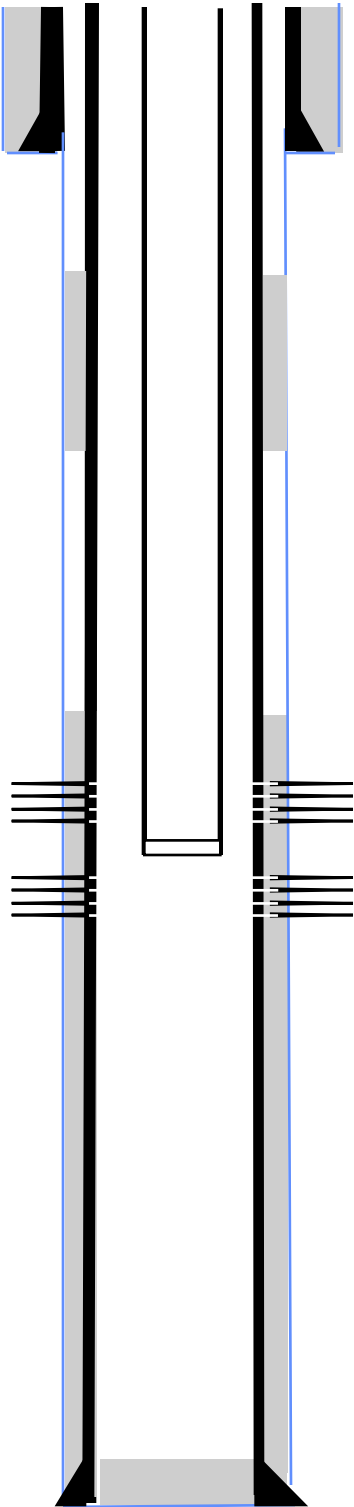

**Surface Casing and Cement**  
8 5/8" ,landed @ 715',cemented with 285 sxs

**Main Hole**  
7-7/8" to TD

**Production Casing and Cement**  
4-1/2" , landed @ 7531',cemented with 630 sxs

**CBP**  
Set @ 7000'. 09-13-12  
Drilled out on 09-14-12

Perf'd the Niobrara from 7074-7080', 7137-7143' @ 4 spf  
Frac'd the Niobrara 7074-7080', 7137-7143'(48 holes), w/ 98,324 gals Hiway Hybrid cross linked gel containing 136,951# 20/40 sand. 09-06-12

**CFP**  
Set @ 7190'. 09-06-12  
Drilled out on 09-14-12

Perf'd the Codell from 7347-7361' @ 3 spf  
Frac'd the Codell 7347-7361' (42 holes) w/ 76,792 gal Hiway Hybrid cross linked gel containing 132,291 # 20/40 sand. 09-06-12

**Production Tubing**  
2-3/8" tubing, set @ 7310'

7540' — Driller's TD