



02469424

067-03207
LOC# 385285
RECEIVEDGENERAL CAS
CATHODIC PROTECTION SERVICES

MAR 10 1989

WELL TYPE GROUNDBED DATA I-22-IND-2814

DATA SHEET NO. 1 of 1

COMPANY UNION Texas Petro. JOB NO. 13069 DATE: 9-29-86
 WELL: Ute# 1-A IND-2814 ~~IND-2814~~ 990 FSL # 990 FUL
 LOCATION: SEC. 13 TWP. 32N RGE. 11W CO. La Plata STATE COLORADO
 ELEV. 4549 FT: ROTARY _____ FT: CABLE TOOL _____ FT: CASING _____
 GROUNDBED: DEPTH 300' FT. DIA 1 3/4 IN. GAS 3.000 LBS. ANODES 10-2" x 60"-D


| DEPTH, FT. | DRILLER'S LOG | EXPLORING ANODE TO STRUCTURE | | | NO COKE | WITH COKE | DEPTH TOP OF ANODES | |
|---------------|-----------------------------|---------------------------------|-----|---|------------|--------------|------------------------|------|
| | | E | I | R | | | NO. | FT. |
| 90 | First water at 120' to 125' | | | | R | R | | |
| 5 | | | | | | | | |
| 100 | Sandy | | | | | | | |
| 5 | | | | | | | | |
| 10 | | | | | | | | |
| 15 | | | | | | | | |
| 20 | | | | | | | | |
| 5 | | | | | | | | |
| 30 | Sandy shale | x | 1.0 | | | | | |
| 5 | | | 1.1 | | | | | |
| 40 | | | 1.0 | | | | | |
| 5 | Sandy | | 0.8 | | | | | |
| 50 | | | 0.6 | | | | | |
| 5 | | | 0.5 | | | | | |
| 60 | | | 0.6 | | | | | |
| 5 | | | 0.6 | | | | | |
| 70 | | | 0.6 | | | | | |
| 5 | | | 0.6 | | | | | |
| 80 | Shale | | 1.1 | | | | | |
| 5 | | | 1.4 | ✓ | 1.4 | 3.3 | 10. | 18 |
| 90 | shale | | 1.5 | | | | | |
| 5 | | | 1.4 | ✓ | 1.4 | 3.9 | 9. | 19.5 |
| 200 | | | 1.0 | | | | | |
| 5 | | | 1.0 | | | | | |
| 10 | | | 1.4 | | | | | |
| 15 | | | 1.4 | ✓ | 1.4 | 4.0 | 8. | 21.5 |
| 20 | | | 1.1 | | | | | |
| 5 | | | 1.0 | | | | | |
| 30 | | | 1.2 | ✓ | 1.2 | 2.9 | 7. | 22 |
| 5 | | | 1.0 | | | | | |
| 40 | | | 1.1 | ✓ | 1.1 | 3.0 | 6. | 24 |
| 5 | | | 1.1 | | | | | |
| 50 | | | 1.5 | ✓ | 1.5 | 4.0 | 5. | 25 |
| 5 | | | 1.4 | | | | | |
| 60 | | | 1.3 | ✓ | 1.3 | 3.3 | 4. | 21 |
| 5 | | | 1.3 | | | | | |
| 70 | | | 1.4 | ✓ | 1.4 | 3.2 | 3. | 27 |
| 5 | | | 1.1 | | | | | |
| 80 | | | 1.2 | ✓ | 1.2 | 1.2 | 2. | 28.0 |
| 5 | | | 1.1 | | | | | |
| 90 | | | 1.0 | ✓ | 1.0 | 0.6 | 1. | 29 |
| 5 | Sandy | | 0.8 | | | | | |
| 300 | TD 300' | | 0.7 | | | | | |

(8.4)

12.69 - AMPS 8.4 - 1.51

Attn: Mr. Erv Greiner

$\nearrow N.$

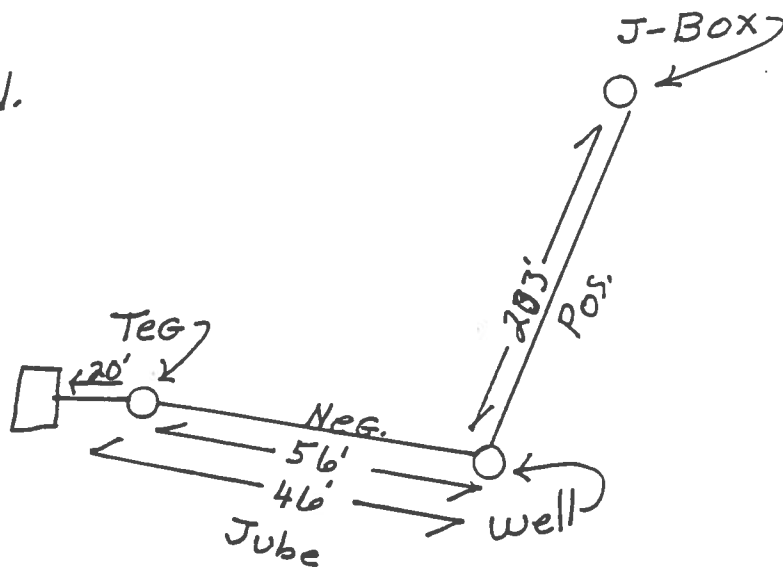

Pos. 203'
Neg. 56'
Tube 46'

General Cathodic

A **LUKENS** COMPANY

UNION Texas Petro. Ute No. 1-A

050.

DR. EC

REF NO. 13069

DWG. NO.

13069-01